

PERFORMANCE SPECIFICATION

SYSTEM SPECIFICATION

for the

ADVANCED PILOT TRAINING (APT)

PROGRAM

AIRCRAFT SYSTEM



Version 1.0

Prepared by:
APT Branch
Training Aircraft Division
Mobility Directorate
US Air Force Life Cycle Management Center
Wright-Patterson AFB, OH 45433

Distribution F: Further dissemination only as directed by Air Force Life Cycle Management Center (AFLCMC)/WLZ, 1970 Monahan Way, Building 11-A, Room 201 Wright-Patterson Air Force Base, Ohio 45433-7239 (1 July 2015) or higher DoD authority.

UNCLASSIFIED

THIS PAGE IS INTENTIONALLY BLANK

SUBMITTED BY:

PETER K. EIDE, Col, USAF Program Manager, Training Aircraft Division Mobility Directorate	Date
--	------

APPROVAL:

KEVIN W. BUCKLEY, SES Program Executive Officer for Mobility	Date
---	------

DARRYL L. ROBERSON, Lieutenant General, USAF Commander, Air Education & Training Command	Date
---	------

THIS PAGE IS INTENTIONALLY BLANK

TABLE OF CONTENTS

1	SCOPE	1
1.1	Identification	1
1.2	System Overview	1
1.3	Document Overview	1
2	APPLICABLE DOCUMENTS	2
2.1	General	2
2.2	Government Documents	2
2.2.1	Specifications, Standards, and Handbooks	2
2.2.2	Other Government Documents, Drawings, and Publications	3
2.3	Non-Government Publications	4
2.4	Order of Precedence	4
3	REQUIREMENTS	5
3.1	Performance and Structural Characteristics	5
3.1.1	Performance Ground Rules	5
3.1.2	Performance	5
3.1.3	Structures	11
3.2	Avionics	18
3.2.1	Communications	18
3.2.2	Navigation	18
3.2.3	Surveillance	19
3.2.4	Datalink and Network Connectivity	20
3.3	Propulsion System	21
3.3.1	Fuel Consumption	21
3.3.2	Engine Starts	21
3.3.3	Automatic Relight	22
3.3.4	Shutdown	22
3.3.5	Stall-Free Operation	23
3.3.6	Thrust Control	23
3.3.7	Thrust Transients	23
3.3.8	Thrust Stability, Droop and Overshoot	23
3.3.9	Thrust Demand and Retention	23
3.3.10	Engine Fire/Overheat Indication	23
3.3.11	Engine Design Service Life	24
3.3.12	Atmospheric Liquid Water Ingestion	24
3.3.13	Bird Ingestion	24
3.3.14	Distortion Intensity Levels	25
3.3.15	Damage Tolerance	25
3.3.16	Ice Ingestion	26
3.3.17	Sand and Dust Ingestion	26
3.4	Vehicle Subsystems	27
3.4.1	Fuel Subsystem	27
3.4.2	Aerial Refueling Subsystem Growth Path (Receiver)	27
3.4.3	Environmental Control Subsystem (ECS)	29
3.4.4	Braking	31

3.4.5	Electrical Power Subsystem.....	31
3.4.6	Hydraulic Subsystem (if utilized).....	32
3.5	Crew Systems.....	32
3.5.1	Human Performance and Human Engineering.....	32
3.5.2	Cockpit Configuration.....	33
3.5.3	Cockpit Stowage.....	33
3.5.4	Safety Devices and Streamers.....	33
3.5.5	Aircrew Physical Anthropometrics.....	33
3.5.6	Anthropometric Accommodation.....	34
3.5.7	Cockpit Reach.....	35
3.5.8	Aircrew Workload.....	35
3.5.9	Aircrew Alerting.....	35
3.5.10	Intercommunications Control System (ICS).....	36
3.5.11	Cockpit Controls.....	37
3.5.12	Interior Finishes, Components and Equipment.....	38
3.5.13	Thermal Contact Hazards.....	38
3.5.14	Cockpit Displays.....	39
3.5.15	Interior Lighting.....	41
3.5.16	Exterior Lighting.....	42
3.5.17	Interior and Exterior Visibility.....	42
3.5.18	Aircraft Transparency/Canopy System.....	43
3.5.19	Aircraft Entry and Exit.....	44
3.5.20	Escape and Egress System.....	44
3.5.21	Aircrew Flight Equipment and Pilot Personal Protection.....	54
3.5.22	Oxygen System.....	56
3.5.23	Ground Personnel/Maintainer Specific Considerations.....	62
3.6	Embedded Training.....	63
3.6.1	Radar System Simulation.....	63
3.6.2	Defensive Management System (DMS).....	66
3.6.3	Weapon Systems.....	67
3.6.4	Embedded Training Presentation Overlays on SAD.....	68
3.6.5	Tactical Datalink (TDL) System Simulation.....	70
3.6.6	Targeting Pod System Simulation.....	70
3.6.7	Mission Scenario Inputs.....	71
3.6.8	Synchronized Combat Environment.....	71
3.6.9	Geographical Area.....	71
3.6.10	Declutter Function.....	72
3.7	Recorded Aircraft Information.....	72
3.7.1	Military Flight Operations Quality Assurance (MFOQA).....	72
3.7.2	Mishap Investigation Data.....	73
3.7.3	Maintenance Data.....	74
3.7.4	Mission Debrief Data.....	74
3.8	Product Support.....	75
3.8.1	Operational Availability (A_o).....	75
3.8.2	Materiel Availability (A_m).....	75
3.8.3	Materiel Reliability (R_m).....	76

3.8.4	Mean Time Between Failures (MTBF).....	76
3.8.5	Fix Rate.....	76
3.8.6	Mean Time Between Maintenance (MTBM)	76
3.8.7	Mean Time To Repair (MTTR)	76
3.8.8	Turn-Around Time.....	76
3.8.9	Diagnostics.....	77
3.8.10	Mean Flight Hours Between Sortie Aborting False Alarms (MFHBSAFA).....	78
3.8.11	Mean Flight Hours Between False Alarms (MFHBFA).....	78
3.8.12	Nameplates and Product Marking.....	79
3.8.13	Maintenance Concept.....	79
3.8.14	Support Equipment (SE).....	79
3.8.15	Maintenance Work Environment.....	80
3.8.16	Manpower and Personnel.....	81
3.9	Climatic and Environmental Conditions.....	81
3.9.1	Natural Climate.....	81
3.9.2	Induced Environment.....	82
3.9.3	Electromagnetic Environmental Effects (E3).....	82
3.10	Architecture and Security	83
3.10.1	Critical Program Information.....	83
3.10.2	Cybersecurity	83
3.10.3	Open Systems Architecture.....	83
3.10.4	Computing Resources	83
3.10.5	ARINC 610 Simulator Compatibility	84
3.11	Utility Attributes.....	84
3.11.1	Fuel Standards.....	84
3.11.2	Lubrication Oil Standards.....	86
3.11.3	Space, Weight, Power and Cooling (SWaP-C) Margins	86
3.11.4	Aircraft Maintenance Safety Protection Equipment (MSPE) Stowage	86
3.11.5	External Stores.....	87
3.11.6	Environment, Safety and Occupational Health (ESOH).....	87
3.11.7	Airworthiness Certification.....	88
3.11.8	Geographic Intelligence (GEOINT)	88
3.11.9	Barrier Rollover	89
3.12	Mission Support.....	89
3.12.1	Data Transfer	89
3.12.2	Mission Planning Interface	89
3.12.3	Mission Scenario Generation.....	89
3.12.4	Mission Debriefing	90
4	VERIFICATION.....	92
4.0	General.....	92
4.0.1	Overview.....	92
4.0.2	Verification Methods	92
4.1	Performance and Structural Characteristics.....	104
4.1.1	Performance Ground Rules.....	104
4.1.2	Performance	104
4.1.3	Structures	111

4.2	Avionics	117
4.2.1	Communications	117
4.2.2	Navigation	118
4.2.3	Surveillance	119
4.2.4	Datalink and Network Connectivity	120
4.3	Propulsion System	121
4.3.1	Fuel Consumption	122
4.3.2	Engine Starts	122
4.3.3	Automatic Relight	123
4.3.4	Shutdown	123
4.3.5	Stall-Free Operation	124
4.3.6	Thrust Control	124
4.3.7	Thrust Transients	124
4.3.8	Thrust Stability, Droop and Overshoot	124
4.3.9	Thrust Demand and Retention	124
4.3.10	Engine Fire/Overheat Indication	124
4.3.11	Engine Design Service Life	124
4.3.12	Atmospheric Liquid Water Ingestion	125
4.3.13	Bird Ingestion	125
4.3.14	Distortion Intensity Levels	126
4.3.15	Damage Tolerance	126
4.3.16	Ice Ingestion	126
4.3.17	Sand and Dust Ingestion	126
4.4	Vehicle Subsystems	126
4.4.1	Fuel Subsystem	126
4.4.2	Aerial Refueling Subsystem Growth Path (Receiver)	127
4.4.3	Environmental Control Subsystem (ECS)	129
4.4.4	Braking	132
4.4.5	Electrical Power Subsystem	132
4.4.6	Hydraulic Subsystem (if utilized)	134
4.5	Crew Systems	135
4.5.1	Human Performance and Human Engineering	135
4.5.2	Cockpit Configuration	135
4.5.3	Cockpit Stowage	135
4.5.4	Safety Devices and Streamers	135
4.5.5	Aircrew Physical Anthropometrics	135
4.5.6	Anthropometric Accommodation	136
4.5.7	Cockpit Reach	136
4.5.8	Aircrew Workload	136
4.5.9	Aircrew Alerting	136
4.5.10	Intercommunications Control System (ICS)	137
4.5.11	Cockpit Controls	138
4.5.12	Interior Finishes, Components and Equipment	139
4.5.13	Thermal Contact Hazards	139
4.5.14	Cockpit Displays	139
4.5.15	Interior Lighting	142

4.5.16	Exterior Lighting	142
4.5.17	Interior and Exterior Visibility	143
4.5.18	Aircraft Transparency/Canopy System	143
4.5.19	Normal Aircraft Entry and Exit	144
4.5.20	Escape and Egress System	145
4.5.21	Aircrew Flight Equipment and Pilot Personal Protection	152
4.5.22	Oxygen System	153
4.5.23	Ground Personnel/Maintenance Specific Considerations	157
4.6	Embedded Training	157
4.6.1	Radar System Simulation	157
4.6.2	Defensive Management System (DMS)	159
4.6.3	Weapon Systems	160
4.6.4	Embedded Training Presentation Overlays on SAD	160
4.6.5	Tactical Datalink (TDL) System Simulation	161
4.6.6	Targeting Pod System Simulation	161
4.6.7	Mission Scenario Inputs	161
4.6.8	Synchronized Combat Environment	161
4.6.9	Geographical Area	162
4.6.10	Declutter Function	162
4.7	Recorded Aircraft Information	162
4.7.1	Military Flight Operations Quality Assurance (MFOQA)	162
4.7.2	Mishap Investigation Data	163
4.7.3	Maintenance Data	163
4.7.4	Mission Debrief Data	164
4.8	Product Support	165
4.8.1	Operational Availability (Ao)	165
4.8.2	Materiel Availability (Am)	165
4.8.3	Materiel Reliability (Rm)	166
4.8.4	Mean Time Between Failures (MTBF)	166
4.8.5	Fix Rate	166
4.8.6	Mean Time Between Maintenance (MTBM)	166
4.8.7	Mean Time To Repair (MTTR)	166
4.8.8	Turn-Around Time	167
4.8.9	Diagnostics	167
4.8.10	Mean Flight Hours Between Sortie Aborting False Alarms (MFHBSAFA)	169
4.8.11	Mean Flight Hours Between False Alarms (MFHBFA)	169
4.8.12	Nameplates and Product Marking	169
4.8.13	Maintenance Concept	169
4.8.14	Support Equipment (SE)	170
4.8.15	Maintenance Work Environment	171
4.8.16	Manpower and Personnel	171
4.9	Climatic and Environmental Conditions	171
4.9.1	Natural Climate	171
4.9.2	Induced Environment	172
4.9.3	Electromagnetic Environmental Effects (E3)	172
4.10	Architecture and Security	172

4.10.1	Critical Program Information.....	173
4.10.2	Cybersecurity.....	173
4.10.3	Open Systems Architecture.....	173
4.10.4	Computing Resources.....	173
4.10.5	ARINC 610 Simulator Compatibility.....	174
4.11	Utility Attributes.....	174
4.11.1	Fuel Standards.....	175
4.11.2	Lubrication Oil Standards.....	175
4.11.3	Space, Weight, Power and Cooling (SWaP-C) Margins.....	175
4.11.4	Aircraft Maintenance Safety Protection Equipment (MSPE) Stowage.....	176
4.11.5	External Stores.....	176
4.11.6	Environment, Safety and Occupational Health (ESOH).....	176
4.11.7	Airworthiness Certification.....	177
4.11.8	Geographic Intelligence (GEOINT).....	177
4.11.9	Barrier Rollover.....	177
4.12	Mission Support.....	177
4.12.1	Data Transfer.....	178
4.12.2	Mission Planning Interface.....	178
4.12.3	Mission Scenario Generation.....	178
4.12.4	Mission Debriefing.....	179
5	PACKAGING.....	181
6	NOTES.....	182
6.1	Acronyms.....	182
6.2	Definitions.....	187
APPENDIX A - APT SYLLABUS MANEUVERS AND MISSION PROFILES.....		198
A.1	High G Maneuvering.....	198
A.2	Flight Endurance Mission Profile.....	199
A.3	Specialized Undergraduate Pilot Training (SUPT) Profile 1, Transition.....	200
A.4	Specialized Undergraduate Pilot Training (SUPT) Profile 2, Instruments/Navigation.....	201
A.5	Specialized Undergraduate Pilot Training (SUPT) Profile 3, Low-Level Navigation.....	202
A.6	Specialized Undergraduate Pilot Training (SUPT) Profile 4, Formation.....	203
A.7	Specialized Undergraduate Pilot Training (SUPT) Profile 5, Cross-Country.....	204
A.8	Introduction to Fighter Fundamentals (IFF) Profile 1, Formation.....	205
A.9	Introduction to Fighter Fundamentals (IFF) Profile 2, Basic Fighter Maneuvers (BFM).....	206
A.10	Introduction to Fighter Fundamentals (IFF) Profile 3, Air Combat Maneuvering.....	207
A.11	Introduction to Fighter Fundamentals (IFF) Profile 4, Basic Surface Attack.....	208
A.12	Introduction to Fighter Fundamentals (IFF) Profile 5, Surface Attack Tactics.....	209
A.13	Introduction to Fighter Fundamentals (IFF) Profile 6, Close Air Support.....	210
A.14	Mission Usage Rates.....	211
APPENDIX B - ESCAPE SYSTEM CALCULATIONS.....		212
B.1	Dynamic Response Index (DRI).....	212
B.2	Multi-axis Dynamic Response Criterion (MDRC).....	214
B.3	Head Injury.....	216
B.4	Neck Injury.....	217
APPENDIX C - STRUCTURES.....		220

C.1 Structures Tables	220
C.2 Discrete Gust Loads Formulas	221
C.2.1 Vertical Gusts on Wing and Fuselage	221
C.2.2 Vertical Gusts on Fuselage and Horizontal Tail	223
C.2.3 Lateral Gusts on Fuselage and Vertical Tail	223
C.3 Power Spectral Technique For Developing Gust Loads	223
APPENDIX D - TRADE SPACE	225
3.1.2.1 High G Maneuvering	225
3.1.2.6 High Angle-of-Attack (AOA) Maneuvering	225
3.2.3.5 Terrain Warning and Avoidance	226
3.2.4.5 Ground Based Training Systems (GBTS) Connectivity	227
3.2.4.6 Ground Support Station (GSS) Connectivity	228
3.4.2.1 Aerial Refueling Subsystem Full Integration (Receiver)	229
3.6.6 Targeting Pod System Simulation	231
3.8.8 Turn-Around Time	232

LIST OF FIGURES

Figure 3-1, Anti-G Trouser Pressurized Air Supply	55
Figure 3-2, Oxygen Concentrations and Regulator Pressure Schedule	58
Figure 3-3, Mask Breathing Pressure Schedule vs G Loading	61
Figure B-1, Seat and Human Axis Coordinate System	213
Figure B-2, Maximum allowable MDRC value vs. Ejection Seat	215
Figure B-3, Probability of Concussion vs. Rotational and Linear Acceleration	216
Figure B-4, Probability of Neck Injury vs. MANIC and NMIX Values	219
Figure C-1, Ground Turning Lateral Load Factor Spectrum	221
Figure C-2, Gust Factor	222

LIST OF TABLES

Table 3-1, Speed Range for Onset of Stall Warning for 1-G Stalls	9
Table 3-2, Lift Range for Onset of Stall Warning for Accelerated Stall	9
Table 3-3, GSS Live Monitoring Functions and Display Presentation	21
Table 3-4, Bird Ingestion	25
Table 3-5, Ice Ingestion	26
Table 3-6, Particle Size Distribution Guidance	27
Table 3-7, Anthropometric Cases 1-7	33
Table 3-8, Anthropometric Cases 1-7 (Additional Characteristics)	34
Table 3-9, Zone 1 Required Controls	35
Table 3-10, Zone 2 Required Controls	35
Table 3-11, Speech Intelligibility	37
Table 3-12, Additional Speech Intelligibility for Maintainers	37
Table 3-13, Thermal Contact Hazards	39
Table 3-14, Situational Awareness Display (SAD)/Navigation Display Presentation	40
Table 3-15, Escape Envelope	47
Table 3-16, Personal Flight Equipment	55

Table 3-17, Survival Kit	56
Table 3-18, Peak Inspiratory and Expiratory Flows and Mask Cavity Pressures.....	58
Table 3-19, Breathing Gas Maximum Allowable Contaminant Concentration	62
Table 3-20, Maintainer Lifting and Carrying Limits	63
Table 3-21, Radar Functionality, Modes, and Display Presentations.....	64
Table 3-22, Target Information.....	64
Table 3-23, Radar System and Display Controls.....	65
Table 3-24, DMS Display Presentation and Visual Cues	66
Table 3-25, DMS Modes and Functions	66
Table 3-26, DMS/RWR Threat Audio.....	67
Table 3-27, Expendables Systems	67
Table 3-28, Weapons Systems.....	68
Table 3-29, Simulated Tactical Information for the Overlays on SAD	69
Table 3-30, TDL Messaging.....	70
Table 3-31, Targeting Pod Functionality	71
Table 3-32, Scenario Inputs	71
Table 3-33, High Resolution Areas	72
Table 3-34, Aircraft/SE Interfaces.....	80
Table 3-35, Maintainer Anthropometric Cases.....	81
Table 3-36, Cold Day and Hot Day Lapse Rates.....	82
Table 3-37, Fuel Contaminant Mixture	85
Table 3-38, Loadout Configurations and External Stores	87
Table 3-39, Constructive Targets.....	90
Table 4-1, Verification Cross Reference Matrix (VCRM).....	94
Table 4-2, Breathing Simulator Profiles	154
Table A-1, Mission Usage Rates	211
Table B-1, Natural Frequency and Damping Ratio Coefficients.....	213
Table B-2, MDRC Dynamic Response Limits per Axis.....	214
Table B-3, MANIC and NMIX Upper Neck Critical Values based on Body Mass.....	218
Table C-1, Turbulence Parameters	220
Table C-2, Cumulative Occurrences per Thousand Runway Landings that Load Factor N_z is Experienced at the Aircraft CG.....	220

1 **1 SCOPE**

2 This System Specification (SS) establishes the performance requirements for the United States
3 Air Force (USAF) Advanced Pilot Training (APT) Aircraft System component of the APT
4 Program. For the purposes of this SS, the “Aircraft System” includes the associated support
5 elements of the aircraft.

6 **1.1 Identification**

7 This SS is for the Aircraft System, Configuration Item (CI) (TBD).

8 **1.2 System Overview**

9 The APT Program will replace the T-38C used in the USAF’s Specialized Undergraduate Pilot
10 Training (SUPT) advanced phase fighter and bomber (F/B) track, and in the Introduction to
11 Fighter Fundamentals (IFF) course. The APT Program will provide student pilots with the
12 foundational flying skills and core competencies required to transition into current generation
13 F/B aircraft.

14 **1.3 Document Overview**

15 The performance requirements and verification requirements for the APT Aircraft system are
16 documented in sections 3 and 4. Note the performance requirements and verification
17 requirements for the Ground Based Training Systems (GBTS) are documented in a separate SS.
18 This APT Program SS captures and conveys the minimum requirements for the aircraft system
19 (note that the requirements designated as “trade space” identify threshold and objective
20 requirements to be traded as part of the proposed solution definition). This APT Program SS is
21 developed using guidance from DID DI-IPSC-81431A, System/Subsystem Specification Data
22 Item Description, and Military Standard (MIL-STD)-961E, Department of Defense (DoD)
23 Standard Practice for Defense Specifications. In addition to the six (6) major sections of the SS,
24 additional appendices are included as necessary to define the requirements of the aircraft system.

25 **2 APPLICABLE DOCUMENTS**26 **2.1 General**

27 The documents listed in this section are specified in sections 3, 4, or 5. This section does not
 28 include documents cited in other sections of this specification or recommended for additional
 29 information or as examples. While every effort has been made to ensure the completeness of the
 30 document list, document users are cautioned that they must meet all specified requirements of
 31 documents cited in sections 3, 4, and 5, whether or not the documents are listed. Where a
 32 revision by supplement, amendment, or notice is called out, the entire document up to and including
 33 the revision is being referenced. When a revision letter or date is not shown, the issue in effect on
 34 the release date of this specification applies.

35 **2.2 Government Documents**36 **2.2.1 Specifications, Standards, and Handbooks**

37 The following specifications, standards, and handbooks form a part of this document to the
 38 extent specified herein. Unless otherwise specified, the issues of these documents are those cited
 39 in the solicitation or contract.

Document Number	Document Title	Issue Date
AN6287	Valve - Air High Pressure 3/4 Hex	15 JUL 88
FED-STD-595C (1)	Colors Used in Government Procurement	31 JUL 08
JSSG-2006	Aircraft Structures	30 OCT 98
JSSG-2007C	Engines, Aircraft, Turbine	10 JUN 11
MIL-STD-129R	Military Marking for Shipment and Storage	18 FEB 14
MIL-STD-130N (1)	Identification Marking of U.S. Military Property	16 NOV 12
MIL-STD-411F	Aircrew Station Alerting Systems	10 MAR 97
MIL-STD-464C	Electromagnetic Environmental Effects Requirements for Systems	01 DEC 10
MIL-STD-704F	Aircraft Electric Power Characteristics	12 MAR 04
MIL-STD-805B	Towing Fittings and Provisions for Military Aircraft, Design Requirements for	07 SEP 87
MIL-STD-810G (1)	Environmental Engineering Considerations and Laboratory Tests	15 APR 14
MIL-STD-882E	System Safety	11 MAY 12
MIL-STD-1472G	Human Engineering	11 JAN 12
MIL-STD-1474E	Noise Limits	15 APR 15
MIL-STD-1530C	Aircraft Structural Integrity Program	01 NOV 05
MIL-STD-1568D	Materials and Processes for Corrosion Prevention and Control in Aerospace Weapons Systems	31 AUG 15
MIL-STD-1760E	Aircraft/Store Electrical Interconnection System	24 OCT 07
MIL-STD-1787C	Aircraft Display Symbology	05 JAN 01
MIL-STD-1797B	Flying Qualities of Piloted Vehicles	15 FEB 06
MIL-STD-3009	Lighting, Aircraft, Night Vision Imaging System (NVIS) Compatible	02 FEB 01
MIL-STD-3013A	Glossary of Definitions, Ground Rules, and Mission Profiles to Define Air Vehicle Performance Capability	9 SEP 08
MIL-STD-3024 (1)	Propulsion System Integrity Program	13 JUL 2015
MIL-DTL-5624W	Turbine Fuel, Aviation, Grades JP-4 and JP-5	28 MAR 16
MIL-E-7016F (1) NOT 2	Electric Load and Power Source Capacity, Aircraft, Analysis of	12 SEP 14
MIL-PRF-7808L	Lubricating Oil, Aircraft Turbine Engine, Synthetic Base	02 MAY 97
MIL-STD-8591 (1)	Airborne Stores, Suspension Equipment and Aircraft-Store Interface	16 NOV 12

Document Number	Document Title	Issue Date
	(Carriage Phase)	
MIL-DTL-23659F	Initiators, Electric, General Design Specification for	10 JUN 10
MIL-PRF-23699G	Lubricating Oil, Aircraft Turbine Engine, Synthetic Base, NATO Code Numbers: O-152, O-154, O-156, and O-167	13 MAR 14
MIL-PRF-25017H (1)	Inhibitor, Corrosion/Lubricity Improver, Fuel Soluble (NATO S-1747)	04 AUG 11
MIL-DTL-25427B SUP 1	Coupling Assembly, Hydraulic, Self-Sealing, Quick Disconnect, General Specification for	08 DEC 09
MIL-DTL-25677F	Adapter, Cap, and Nozzle, Pressure Lubricating Oil Servicing, Aircraft, General Specification for	03 OCT 14
MIL-A-25896E	Adapter, Pressure Fuel Servicing, Nominal 2.5-Inch Diameter	18 JAN 83
MIL-PRF-32239A	Coating System, Advanced Performance, for Aerospace Applications	01 OCT 14
MIL-D-81980 (1)	Design and Evaluation of Signal Transmission Subsystems, General Specification for	14 AUG 75
MIL-C-83124	Cartridge Actuated Devices/Propellant Actuated Devices General Design Specification for	30 OCT 69
MIL-C-83125	Cartridges for Cartridge Actuated/Propellant Actuated Devices, General Design Specification for	10 MAR 69
MIL-P-83126A	Propulsion Systems, Aircrew Escape, Design Specification for	08 FEB 80
MIL-DTL-83133J	Turbine Fuel, Aviation, Kerosene Type, JP-8 (NATO F-34), NATO F-35, and JP-8+100 (NATO F-37)	16 DEC 15
MIL-DTL-85470B	Inhibitor, Icing, Fuel System, High Flash NATO Code Number S-1745	15 JUN 99
MIL-PRF-87260B	Foam Material, Explosion Suppression, Inherently Electrostatically Conductive, for Aircraft Fuel Tanks	2 NOV 06
STANAG-3098	Aircraft Jacking	14 MAY 14
STANAG-3208	Air Conditioning Connections	09 SEP 09
STANAG-3209	Tyre Valve Couplings	21 OCT 14
STANAG-3237	Aperture of Terminal Ring or Link of Aircraft Lifting Slings	25 NOV 82
STANAG-3278	Aircraft Towing Attachments and Devices	05 NOV 14
STANAG-3315	Aircraft Cabin Pressurizing Test Connections	06 OCT 98
STANAG-3372	Low Pressure Air And Associated Electrical Connections for Aircraft Engine Starting	05 NOV 14
STANAG-3595	Aircraft Fitting for Pressure Replenishment of Gas Turbine Engines with Oil	10 SEP 09
STANAG-3632	Aircraft and Ground Support Equipment Electrical Connections for Static Grounding	20 AUG 14
STANAG-3766	Grease Nipples	08 JUL 97

(Copies of these documents are available online at <http://quicksearch.dla.mil>)

40 2.2.2 Other Government Documents, Drawings, and Publications

41 The following other Government documents, drawings, and publications form a part of this
42 document to the extent specified herein. Unless otherwise specified, the issues of these
43 documents are those cited in the solicitation or contract.

Document Number	Document Title	Issue Date
AFPD 62-6	USAF Airworthiness	11 JUN 10
AFI 62-601	USAF Airworthiness	11 JUN 10
AFH 63-1402	Aircraft Information Program	19 MAR 01
AFI 91-203	Air Force Consolidated Occupational Safety Instruction	15JUN 12
AFI 91-225	Aviation Safety Programs	26 JAN 15
ATP-3.3.4.2	Air-to-Air Refueling ATP-56	NOV 13
ATP-3.3.4.5	Air-to-Air (Aerial) Refueling Equipment: Boom-Receptacle System and Interface Requirements	JUN 13

UNCLASSIFIED

Document Number	Document Title	Issue Date
	Corrosion Prevention and Control Planning Guidebook for Military Systems and Equipment, Spiral 4	4 FEB 14
OMSC-TCH-01	Open Mission Systems Definition and Documentation Version 1.1	18 DEC 15
	HQ AFFSA Whitepaper: Primary Flight Reference Endorsement Process	16 OCT 15

44 2.3 Non-Government Publications

45 The following documents form a part of this document to the extent specified herein. Unless
46 otherwise specified, the issues of these documents are those cited in the solicitation or contract.

Document Number	Document Title	Issue Date
	Technical Standard for Future Airborne Capability Environment (FACE), Edition 2.1	MAY 14
ARINC 610C	Guidance for Design and Integration of Aircraft Avionics Equipment in Simulators	SEP 09
ASTM-D1655	Standard Specification for Aviation Turbine Fuels	30 OCT 15
NAS411	Materials Hazardous Management Program	30 SEP 13
NAS411-1	Hazardous Material Target List	30 SEP 13
SAE-AS50881F	Wiring, Aerospace Vehicle	29 MAY 15
SAE-ARP5015A	Ground Equipment - 400 Hertz Ground Power Performance Requirements	14 JAN 11
SAE-AS5440A	Hydraulic Systems, Aircraft, Design and Installation Requirements For	3 JAN 11
SAE-ARP5825A	Design Requirements and Test Procedures for Dual Mode Exterior Lights	6 MAY 16
SAE-AS25486B	Connector, Plug, Attachable External Electric Power, Aircraft, 115/200 Volt, 400 Hertz	9 MAR 15
SAE-AS90362A	Connector, Receptacle, External Electric Power, Aircraft, 115/200 Volt, 400 Hertz	21 OCT 10

47 2.4 Order of Precedence

48 Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this
49 document and the references cited herein, the text of this document takes precedence. Nothing in
50 this document, however, supersedes applicable laws and regulations unless a specific exemption
51 has been obtained.

52 3 REQUIREMENTS

53 Definitions in section 6.2 help to clarify and form a part of the requirements in sections 3 and 4.
54 “*Italicized text*” indicates existence of a definition in section 6.2.

55 3.1 Performance and Structural Characteristics

56 3.1.1 Performance Ground Rules

57 Unless otherwise specified, the Performance and Structural Characteristics (section 3.1 and
58 subparagraphs) shall be met using the following performance ground rules:

- 59 a. Jet A with military additives fuel grade with a density of 6.8 pounds per US gallon and
60 fuel heating value of 18,400 British Thermal Units per pound.
- 61 b. Two-person aircrew (average nude aircrew member weight of 200 pounds each) wearing
62 USAF Standard Personal Flight Equipment weighing 26.3 pounds (see Table 3-16).
- 63 c. All *aircraft* systems/subsystems/components operating normally.
- 64 d. International Standard Atmosphere model as defined by MIL-STD-3013, Appendix A.
- 65 e. *Standard Configuration* (SWaP-C margin requirements met).
- 66 f. No wind.
- 67 g. All load factors measured at the *aircraft* center of gravity (CG).

68 3.1.2 Performance

69 3.1.2.1 High G Maneuvering

70 SEE APPENDIX D.

71 3.1.2.2 Instantaneous G-onset Rate

72 The *aircraft* shall perform high G maneuvering with an instantaneous G-onset rate of at least 6 G
73 per second using the following additional performance ground rules: Fuel weight at 50%
74 (relative to maximum fuel capacity), pressure altitude (*PA*) equal to 15,000 feet, Airspeed no
75 greater than 0.9 Mach and Standard Day. The *aircraft* shall immediately start a return to +1.0 G
76 flight by relaxing the stick force/deflection.

77 3.1.2.2.1 Average G-onset Rate

78 From a steady +1.5 G trimmed level turn, using an abrupt maximum pitch control step input the
79 *aircraft* shall traverse from +1.5 G and pass through +7.5 G (or the angle-of-attack for CL_{max}) in
80 1.7 seconds without over-G or departure. The *aircraft* shall immediately start a return to +1.0 G
81 flight by relaxing the stick force/deflection. This shall be achieved using the following
82 additional performance ground rules: Fuel weight at 50% (relative to maximum fuel capacity),
83 *PA* equal to 15,000 feet, symmetric and planned asymmetric loadings, Standard Day, Corner
84 Speed ± 50 KEAS.

85 3.1.2.3 Negative and Zero G Flight**86 3.1.2.3.1 Negative G Flight**

87 The *aircraft* shall fly in negative gravity for at least 10 seconds with unlimited occurrences and
88 without adverse effects to the *aircraft* and subsystems for all engine thrust levels.

89 3.1.2.3.2 Zero G Flight

90 The *aircraft* shall fly in zero gravity for at least 10 seconds with unlimited occurrences and
91 without adverse effects to the *aircraft* and subsystems for all engine thrust levels. (Note: Zero
92 gravity is defined as -0.5 to +0.5 G.)

93 3.1.2.4 Instantaneous Turn Rate

94 The *aircraft* shall perform instantaneous turn rate of at least 18° per second using the following
95 additional performance ground rules: Fuel weight at 50% (relative to maximum fuel capacity),
96 *PA* equal to 15,000 feet, Airspeed no greater than 0.9 Mach and Standard Day.

97 3.1.2.5 Sustained Turn Rate

98 The *aircraft* shall perform sustained turn rate of at least 12.5° per second using the following
99 additional performance ground rules: level flight, fuel weight at 50% (relative to maximum fuel
100 capacity), *PA* equal to 15,000 feet, airspeed no greater than 0.9 Mach and Standard Day.

101 3.1.2.6 High Angle-of-Attack (AOA) Maneuvering

102 SEE APPENDIX D.

103 3.1.2.7 Flight Endurance

104 The *aircraft* shall have sufficient fuel capacity to complete the unrefueled training sortie
105 illustrated and defined in section A.2.

106 3.1.2.8 Takeoff Distance

107 The *aircraft* (including all Technical Order takeoff and store loadout configurations) shall have a
108 *total takeoff distance* no greater than 6400 feet using an 8000-foot, hard-surface runway and the
109 following worst case weather conditions for performance calculations: 10 knot tailwind, wet
110 runway with Runway Condition Reading (RCR) of 12, zero runway slope, normal takeoff flap
111 setting, *maximum takeoff gross weight*, and *Density Altitude (DA)* equal to 7464 feet (*DA*
112 represents 97° F, dew point of 38° F, 4093 feet *PA*).

113 3.1.2.9 Landing Distance

114 The *aircraft* (including all Technical Order landing and store loadout configurations) shall have a
115 *landing ground roll distance* no greater than 7,000 feet that provides for flight operations on an
116 8000-foot, hard-surface runway using the following worst case weather conditions for
117 performance calculations: 10 knot tailwind, wet runway with RCR of 12, zero runway slope, all
118 possible flap settings, 80% fuel weight (relative to maximum fuel capacity), *DA* equal to 7464

119 feet (*DA* represents 97° F, dew point of 38° F, 4093 feet *PA*), and without the use of drag
120 chute(s).

121 **3.1.2.10 Takeoff and Landing in Crosswinds**

122 **3.1.2.10.1 Lateral-Directional Control in Crosswinds**

123 It shall be possible to take off and land (including all Technical Order store loadout
124 configurations) with normal aircrew skill and technique in 90° crosswinds, from either side, of
125 velocities up to 25 knots (to include gusts) with no worse than Level 2 *handling qualities*. Roll
126 control forces shall not be so large or so small as to be *objectionable* to the aircrew.

127 **3.1.2.10.2 Takeoff Run and Landing Rollout in Crosswinds**

128 Yaw and roll control power, in conjunction with other normal means of control, shall be
129 adequate to maintain a straight path on the ground or other landing surface during takeoff run
130 and landing rollout in *calm air* and in crosswinds up to 25 knots. This requirement applies on
131 dry (RCR of 23) and wet (RCR of 12) runways (including all Technical Order store loadout
132 configurations). Aerodynamic control power alone shall be sufficient to maintain control at all
133 airspeeds above 50 knots.

134 **3.1.2.11 Takeoff Climb Gradient Performance**

135 The *aircraft* (including all Technical Order store loadout configurations, and one-engine
136 inoperative situations for two-engine *aircraft*) shall provide a climb gradient of at least 200 feet
137 per nautical mile (NM) using the following additional performance ground rules: 8000-foot
138 runway, Instrument Flight Rules (IFR), no wind, *DA* equal to 7464 feet (*DA* represents 97° F,
139 dew point of 38° F, 4093 feet *PA*).

140 **3.1.2.12 General Handling Characteristics (including all Technical Order store loadout 141 configurations)**

142 **3.1.2.12.1 Aircraft Flying Qualities**

143 The *aircraft* shall exhibit *flying qualities* compatible with the performance, mission, flight
144 phases, and tasks of the APT syllabus maneuvers and mission profiles listed in APPENDIX A.

145 **3.1.2.12.2 Flying Qualities in Atmospheric Disturbances**

146 While complying with 3.1.2.12.1, the *aircraft* shall exhibit no worse than Level 1 (*Satisfactory*)
147 *flying qualities* in *calm air* and *common atmospheric disturbances*, and no worse than Level 2
148 (*Tolerable*) *flying qualities* in *uncommon atmospheric disturbances* and with no *Pilot-in-the-loop*
149 *Oscillations (PIO)*.

150 **3.1.2.12.3 Student Skill Level Handling Characteristics**

151 The *aircraft* shall have levels of safety, redundancy, performance, and normal and emergency
152 procedures commensurate with the skill levels of students.

153 3.1.2.12.4 Student Fault Tolerant Flight Characteristics

154 The *aircraft* (including all Technical Order landing and store loadout configurations) shall be
155 *tolerant* of common student errors. Common student errors shall include, as a minimum, low-
156 airspeed departures, exceeding maximum operating speed by 20 knots, and delayed and/or
157 misapplied controls.

158 3.1.2.12.5 Control Margin

159 Aerodynamic control power, control surface rate, and hinge moment capability shall provide
160 adequate control margins for restoring moments throughout the combined range of all attainable
161 AOA's (both positive and negative) and sideslip angles.

162 3.1.2.12.6 Safe Termination

163 For all flight conditions, control margins shall be such that all flight phases can be terminated
164 safely and a go-around can be successfully accomplished.

165 3.1.2.12.7 Warning and Indication of Approach to Dangerous Flight Conditions

166 When approaching *dangerous flight conditions*, the *aircraft* shall provide clear and unambiguous
167 *warning* and indication of approach to such conditions with sufficient time for the aircrew to
168 recognize the impending dangers and take preventive action.

169 3.1.2.12.8 Departure Resistance

170 The *aircraft* shall be *resistant to departure* from controlled flight, *post-stall gyrations* and *spins*
171 while conducting all APT syllabus maneuvers and the mission profiles listed in APPENDIX A.
172 Departure from controlled flight will only occur with a large and reasonably sustained
173 misapplication of pitch, roll, or yaw controls, or a combination thereof.

174 3.1.2.12.8.1 Recovery from Post-Stall Gyration and Spins

175 The proper recovery technique(s) shall be readily apparent to the aircrew, be simple and easy to
176 apply under the motions encountered, and provide prompt recovery from all *post-stall gyrations*,
177 *incipient spins*, and *developed spins*. The recovery techniques for *post-stall gyrations*, *incipient*
178 *spins*, and *developed spins* shall be the same or at least compatible.

179 3.1.2.12.9 Stalls

180 The following stall requirements apply for all allowable *aircraft* loadings and configurations, in
181 straight un-accelerated flight, and in turns and pull-ups with attainable normal accelerations up to
182 the allowable limit load factor.

183 3.1.2.12.9.1 Approach to Stall

184 The onset of a stall *warning* shall occur within the speed limits of Table 3-1 for 1-G stalls and
185 within the lift limits of Table 3-2 for accelerated stalls.

186

Table 3-1, Speed Range for Onset of Stall Warning for 1-G Stalls

Flight Phase	Minimum Speed for Onset of Warning	Maximum Speed for Onset of Warning
Approach	Higher of 1.05 V_s or $V_s + 5$ knots	Higher of 1.10 V_s or $V_s + 10$ knots
All Others	Higher of 1.05 V_s or $V_s + 5$ knots	Higher of 1.15 V_s or $V_s + 15$ knots
Notes: V_s = Stall velocity		

187

Table 3-2, Lift Range for Onset of Stall Warning for Accelerated Stall

Flight Phase	Minimum Lift for Onset of Warning	Maximum Lift for Onset of Warning
Approach	82% of $C_{L_{stall}}$	90% of $C_{L_{stall}}$
All Others	75% of $C_{L_{stall}}$	90% of $C_{L_{stall}}$
Notes: $C_{L_{stall}}$ = Lift coefficient at stall AOA		

188 3.1.2.12.9.2 Tactile/Physical Cues for Stall Warning

189 The *aircraft* shall *alert* the aircrew of the *aircraft* approach to stall through tactile/physical
190 means (other than aural or visual) consisting of shaking of the cockpit controls or *aircraft*
191 buffeting, or both.

192 3.1.2.12.9.3 Aural and Visual Stall Warning**193 3.1.2.12.9.3.1 Aural and Visual Cues for Stall Warning**

194 The *aircraft* shall provide both aural and visual cues (via the *head-up type display*) when the
195 *aircraft* is approaching a stall.

196 3.1.2.12.9.3.2 Aural and Visual Stall Warning Duration

197 The *aircraft* shall provide aural and visual stall *warnings* until recovery from approach to stall.

198 3.1.2.12.9.3.3 Aural and Visual Stall Warning Conditions

199 The *aircraft* aural and visual stall *warnings* shall be limited to the following:

- 200 a. Conditions that replicate landing configurations at all altitudes.
- 201 b. Any configurations below 5,000 feet Above Ground Level (AGL).

202 3.1.2.12.9.4 Stall Recovery

203 The *aircraft* shall enable the aircrew to prevent and recover from a stall by simple use of the
204 pitch, roll, and yaw controls without excessive control forces, excessive loss of altitude or build-
205 up of speed.

206 3.1.2.12.10 Buffet

207 There shall be no *aircraft* buffet that detracts from mission effectiveness except for stall
208 *warning*.

209 3.1.2.12.11 Pilot-in-the-loop Oscillations (PIO)

210 The *aircraft* shall have no tendency for *PIO*.

211 3.1.2.12.12 Failures

212 No single *failure* of any *component* or combination of single independent *failures* shall result in
213 loss of control or *flying qualities* worse than Level 2 (*Tolerable*); *Special Failure States* are
214 excepted.

215 3.1.2.13 Flight Control System (including all store loadout configurations)**216 3.1.2.13.1 Augmentation Systems****217 3.1.2.13.1.1 Augmentation System Operation**

218 Operation of stability augmentation and control augmentation systems and devices, including
219 any performance degradation due to saturation, shall not introduce any *objectionable* flight or
220 ground *handling characteristics*.

221 3.1.2.13.1.2 Augmentation System Performance Degradation

222 Any performance degradation of stability and control augmentation systems due to saturation of
223 *components*, rate limiting, or surface deflections, shall only be momentary, and shall not
224 introduce any *objectionable* flight or ground *handling characteristics*.

225 3.1.2.13.1.3 Flight Control System Operation

226 For all normal and failure states, flight control system operation shall not cause excessive
227 transients or oscillations due to configuration and mode changes that may induce *PIO*, flutter,
228 divergence, aeroelastic instabilities or loss of control on the ground and within the flight
229 envelope.

230 3.1.2.13.2 Control Surface Displacement Rates

231 Control surface deflection rates shall not limit the ability of the *aircraft* to perform operational
232 maneuvers in *common* and *uncommon atmospheric disturbances*. Control rates shall be adequate
233 to retain stabilization and control in *extraordinary atmospheric disturbances*.

234 3.1.2.13.3 Cockpit Controller Characteristics

235 The *aircraft* pitch, roll, and yaw control forces and displacement shall be well balanced, not
236 *objectionable*, and compatible with the aircrew ability to apply simultaneous control in all axes.

237 **3.1.2.13.3.1 Cross-Coupling**

238 No controller (continuous or discrete) that affects the motion of the *aircraft* shall create a
239 secondary response that is *objectionable* (for Levels 1 and 2) or *dangerous* (for Level 3).

240 **3.1.2.13.4 Control Centering**

241 Pitch, roll, and yaw controls shall exhibit positive centering in flight at any normal trim setting.

242 **3.1.2.13.5 Control Free Play**

243 The cockpit controls (stick, rudder pedals, and throttle(s)) deadband and hysteresis shall not
244 result in aircrew/*aircraft* interaction that may cause *PIO* or loss of control.

245 **3.1.2.13.6 Control Linearity**

246 There shall be no non-linearities within the integrated flight control system that may induce a
247 departure, aircrew coupling, or loss of control.

248 **3.1.2.14 Over-G Condition (including all store loadout configurations)**249 **3.1.2.14.1 Warnings of Approaching G Limit**

250 For *aircraft* configurations with an analog flight control system, the *aircraft* shall provide aural
251 *warnings* of approaching the G limit for all *aircraft* configurations and weights.

252 **3.1.2.14.2 G-limiter**

253 The *aircraft* shall have an automatic G-limiter that prevents the aircrew from over-stressing the
254 *aircraft* above limit loads, throughout the flight envelope, for all *aircraft* configurations and
255 weights.

256 **3.1.2.14.3 Over-G Feedback**

257 The *aircraft* shall provide definitive feedback in the form of aural tones and visual cues in the
258 *head-up type display* when an over-G condition occurs.

259 **3.1.3 Structures**260 **3.1.3.1 Design Service Life**

261 The *design service life* of the *aircraft* fleet shall be sufficient for 22 years of operation, assuming
262 a maximum utilization rate of 30.3 hours per month. The airframe *design service life* of each
263 individual *aircraft* shall be 8,000 flight hours for the mission profiles and usage rates contained
264 in APPENDIX A. The takeoff gross weight for each profile shall be at maximum fuel load for
265 the *standard configuration* as noted for the profiles in APPENDIX A. (Note: Downloading of
266 fuel for a particular mission to reduce the takeoff gross weight is not permitted.)

267 3.1.3.2 Materials, Processes, and Parts

268 MIL-STD-1530 design process shall be used for the structural design of the *aircraft*. The finish
269 shall be compatible with corrosion control procedures as described in the Contractor-developed
270 Corrosion Prevention and Control Plan, MIL-STD-1530, and MIL-STD-1568.

271 3.1.3.3 Fasteners

272 Fastener selection, installation, quality assurance (including screw threads and screw thread
273 quality verification techniques), and joining methods shall be commensurate with the specified
274 airframe operational and support requirements. Fasteners that could result in foreign object
275 damage or loss of the *aircraft* if they separate from the structure shall have provisions to assure
276 they are either retained on the structure or cannot become loose.

277 3.1.3.4 Corrosion Prevention and Control

278 The *aircraft system* shall include corrosion prevention and control measures for all *aircraft*
279 structures and *components* as described in both MIL-STD-1530 and MIL-STD-1568 and using
280 the guidance of the Corrosion Prevention and Control Planning Guidebook for Military Systems
281 and Equipment.

282 3.1.3.4.1 Paint Scheme

283 The *aircraft* shall be painted in accordance with (IAW) an approved Air Education and Training
284 Command (AETC) paint scheme using a Non-Hexavalent Chromium paint system that meets the
285 current military aerospace applications for advanced performance requirements (in MIL-PRF-
286 32239) for the *outer mold line* surfaces.

287 3.1.3.5 General Parameters and Conditions**288 3.1.3.5.1 Airframe Configurations**

289 The airframe configurations shall encompass those applicable to flight and ground conditions of
290 authorized use and usage missions of the *aircraft*.

291 3.1.3.5.2 Equipment and Stores

292 The airframe shall support and react the loads and motion of all equipment and stores required
293 and expected to be carried by the *aircraft*.

294 3.1.3.5.3 Speeds

295 The ground and flight structural loads of the airframe shall include the *level flight maximum*
296 *speed* (V_H), the *limit speed* (V_L), the *gust limit speed* (V_G), and all other attainable speeds in
297 conjunction with all configurations, gross weights, centers of gravity, thrust or power settings,
298 altitudes, and usage spectra derived from the mission profiles.

299 3.1.3.5.4 Altitudes

300 The ground and flight structural loads of the airframe shall include all attainable altitudes in
301 conjunction with all *aircraft* configurations, gross weights, centers of gravity, power, speeds,
302 type of atmosphere, and usage derived from the mission profiles.

303 3.1.3.5.5 Limit Loads

304 The limit loads, to be used in the analysis of elements of the airframe subject to deterministic
305 design criteria, shall be the maximum and most critical combination of loads that can result from
306 ground and flight use of the *aircraft*, including maintenance activity and loads whose frequency
307 of occurrence is greater than or equal to 1×10^{-7} per flight. All loads resulting from the
308 requirements of this specification are limit loads unless otherwise specified.

309 3.1.3.5.6 Ultimate Loads

310 Ultimate loads shall be obtained by multiplying limit loads by a factor of safety of 1.5. These
311 ultimate loads shall be used in the design of elements of the airframe and subsystems. The
312 airframe and all subsystems shall not experience catastrophic *failure* when subjected to ultimate
313 loads.

314 3.1.3.6 Structural Loads**315 3.1.3.6.1 Flight Loads**

316 The *aircraft* shall perform (without degradation to the *aircraft* structures, *components*, and
317 systems) to the following flight load factors.

318 3.1.3.6.1.1 Symmetric Maneuver Load Factors

319 The *aircraft* design limit load factor during symmetric maneuvers shall be -3.0 G to +8.0 G in
320 the *aircraft* body axis for all speeds up to V_L . These load factors apply to the *basic flight design*
321 *gross weight* and all lesser flight weights. At weights higher than the *basic flight design gross*
322 *weight*, the design limit load factors shall be those that maintain a constant product of the
323 aforementioned limit load factors and the *basic flight design gross weight*.

324 3.1.3.6.1.2 Asymmetric Maneuver Load Factors

325 The *aircraft* design limit load factor during asymmetric maneuvers shall be 67% of the positive
326 symmetric load factor to -1 G for speeds up to V_L and all flight weights up to and including the
327 *basic flight design gross weight*. At weights higher than the *basic flight design gross weight*, the
328 design limit load factors shall be those that maintain a constant product of the aforementioned
329 limit load factors and the *basic flight design gross weight*.

330 3.1.3.6.1.3 Pressurization

331 The pressure differentials applied in the pressurized portions of the airframe, including fuel
332 tanks, shall be the maximum pressure differentials attainable during flight within the flight
333 envelope, during ground maintenance, and during ground storage or transportation of the
334 *aircraft*. The following pressurization load factors shall be applied:

- 335 a. For normal operations (level flight), the maximum pressure differentials attainable shall
336 be increased by a factor not less than 1.33 when acting separately and when in
337 combination with 1 G level flight loads and fuel inertia. The maximum pressure
338 differentials attainable shall include effects of undetectable and uncontrollable pressure
339 regulation system *failures* occurring with a probability of $>10^{-5}$ per flight.
- 340 b. For normal operations (maneuver and gust), the maximum pressure differentials
341 attainable shall be increased by a factor not less than 1.00 when acting separately and
342 when in combination with maximum and minimum flight loads and fuel inertia and shall
343 include effects of undetectable and uncontrollable pressure regulation system *failures*
344 occurring with a probability of $>10^{-5}$ per flight.
- 345 c. For normal ground operations including maintenance, the maximum pressure differentials
346 attainable shall be increased by a factor not less than 1.33.

347 The primary structure shall withstand the effects of sudden release of pressure. The structure
348 (including nonstructural panels, doors, etc.) shall not cause injury to properly restrained aircrew
349 when such a rapid release of pressure occurs. *Failures* shall not degrade, damage, or cause to
350 fail any other *components* of the flight control, fuel, hydraulic, or electrical systems.

351 **3.1.3.6.1.4 Discrete Gust Loads**

352 Discrete gust loads shall be included in the analysis of the structural capability of the *aircraft*.
353 For discrete gust analysis, the *aircraft* shall be considered in straight, level, unyawed flight with
354 the appropriate balancing horizontal tail load and trim vertical tail load. The *aircraft* shall
355 encounter discrete vertical and lateral gust of design velocity at the specified speeds and critical
356 weights. Design gust velocities shall be the following:

- 357 a. 66 feet per second (EAS) from 0 to 20,000 feet *PA* at V_G .
358 b. 50 feet per second (EAS) from 0 to 20,000 feet *PA* at V_H .
359 c. 25 feet per second (EAS) from 0 to 20,000 feet *PA* at V_L .
360 d. From 20,000 to 50,000 feet *PA*, reduce the limit gust velocities linearly from 66 feet per
361 second (EAS) to 38 feet per second (EAS), 50 feet per second (EAS) to 25 feet per
362 second (EAS), and 25 feet per second (EAS) to 12.5 feet per second (EAS).

363 **3.1.3.6.1.4.1 Discrete Gust Formulas**

364 *Aircraft* loads derived from the discrete gust approach shall not include possible benefits that
365 may be derived from a stability augmentation system. Loads on *aircraft components* shall be
366 derived using the gust load formulas specified in section C.2. These loads shall be balanced
367 through the *aircraft* by linear and rotational inertial forces.

368 **3.1.3.6.2 Ground Loads**

369 The *aircraft* shall have sufficient structural integrity to operate, takeoff, and land on the ground
370 under the appropriate parameters and conditions in attainable combinations. Required and
371 expected to be encountered combinations of other applicable parameters of section 3.1.3 shall be
372 considered. Lesser values of the following subsections are applicable in determining attainable
373 combinations.

374 3.1.3.6.2.1 Landing Sink Speeds

375 The maximum landing touchdown vertical sink speeds of the *aircraft* center of gravity (CG) for
376 the airframe and landing gear designs shall not be less than 13 feet per second for the *landing*
377 *design gross weight* and 10 feet per second for the *maximum landing design weight*.

378 3.1.3.6.2.2 Ground Wind Loads**379 3.1.3.6.2.2.1 Mooring**

380 The *aircraft* shall withstand a 70 knot wind from any horizontal direction relative to the *aircraft*
381 with the *aircraft* secured in the static attitude using the appropriate equipment (e.g., chocks, gust
382 locks, tie downs) without damage to the *aircraft*, for all *aircraft* weights. The *aircraft* shall be
383 equipped with airworthy permanently installed tie down points. The *aircraft* shall have
384 provisions for control surface gust locks necessary to meet the above mooring wind requirement.

385 3.1.3.6.2.2.2 Doors, Canopy, and Windshield

386 The transparency system, storage compartment doors, avionics bay doors, and engine cowling
387 doors shall be capable of being maintained in their open position and shall withstand the loads
388 resulting from a 35-knot steady wind from any horizontal direction combined with a vertical load
389 factor (at the center of gravity) of $1.0 G \pm 0.5 G$ and horizontal load factor (in the most critical
390 direction) of $0.5 G$'s. In addition, operation of the transparency system under the above
391 conditions shall not result in detrimental effects upon the airframe.

392 3.1.3.6.2.2.3 Crosswinds Loads

393 The loads due to crosswinds at landing, take-off, or touch-and-go shall be those loads resulting
394 from components of surface winds perpendicular to the runway centerline with the values stated
395 in section 3.1.2.10.

396 3.1.3.6.3 Repeated Loads

397 All sources of repeated loads shall be considered and included in the development of the service
398 loads spectra and shall not detract from the airframe *design service life*. Service Loads spectra
399 shall be based on the mission usage profiles in APPENDIX A. Significant sources of repeated
400 loads shall include, but are not limited to, the following six subsections for operational and
401 maintenance conditions.

402 3.1.3.6.3.1 Maneuvers

403 The *aircraft* maneuver loads spectra shall be generated and based on a flight segmented mission
404 approach utilizing the mission segment data documented in APPENDIX A. Each segmented
405 mission profile shall be analyzed on the basis of the provided mission segment load factors with
406 a rational distribution of weight, center of gravity, speed, altitude, and other significant
407 parameters included. The spectrum shall be proportioned between symmetrical and
408 asymmetrical maneuvers based on the mission mix and load factor exceedance data documented
409 in APPENDIX A. The roll rate exceedance spectrum for asymmetric maneuvers shall be based
410 on 20% of the symmetric maneuver segment.

411 3.1.3.6.3.2 Gusts

412 The gust loads spectra shall be based on the gust environment while flying the specified mission
413 profiles in APPENDIX A and the gust loads spectra shall be determined utilizing the turbulence
414 parameters in Table C-1 and the power spectral technique for developing gust loads as described
415 in section C.3.

416 3.1.3.6.3.3 Landings

417 The landing loads shall be based on the number of landings (touch and go and full stop)
418 documented in APPENDIX A. A rational analysis shall be used to determine and distribute
419 (among the landing sink speed cumulative occurrences) the landing weights commensurate with
420 the mission profiles in APPENDIX A.

421 3.1.3.6.3.4 Other Ground Loads

422 The taxi, braking, brake release, pivoting, turning, towing, and miscellaneous ground loads
423 spectra shall include vertical, lateral, and longitudinal loads resulting from ground operation at
424 operational weights. These spectra shall include the following items: (1) Braking occurrences
425 per full-stop landings representative of operational usage; (2) Pivoting occurrences of once per
426 ten full stop landings with 0.5 times the torque obtained from the design pivoting conditions; (3)
427 Turning loads based on the occurrences in Figure C-1 with an equal distribution of right and left
428 turns; (4) Taxiway, ramp, takeoff and landing, roll-out vertical loads spectra resulting from
429 operation on prepared surfaces.

430 Dynamic taxi loads shall be based on the occurrences specified in Table C-2 for all weights up to
431 and including the *maximum takeoff gross weight* (no reductions are permitted for fuel used
432 during taxi and preflight operations). The effects of weight, CG position, mass distribution,
433 ground speed, and landing gear characteristics shall be included.

434 3.1.3.6.3.5 Pressurization

435 The number of pressurization cycles shall be developed based on the number of flights
436 documented in APPENDIX A and maintenance ground pressure checks.

437 3.1.3.6.3.6 Repeated Operation of Movable Structures

438 Impact, operational, and residual load occurrences to operation of movable structures shall be
439 determined.

440 3.1.3.7 Bird Strike/Hail Impact**441 3.1.3.7.1 Transparency System Bird Strike Capability**

442 The transparency system shall withstand the impact of a 4-pound bird with the corresponding
443 *aircraft* speed listed below, in a manner consistent with normal flight without penetration, injury
444 to either aircrew member, and without optical degradation of the transparency system below
445 levels required for safe *aircraft* control and landing. There shall be no bird penetration into the
446 cockpit through the associated support frame(s). If the *aircraft* has no separate windshield, the
447 entire transparency system shall meet the windshield bird strike requirements.

448 Windshield: 450 KTAS or the *aircraft* maximum operational true airspeed that can be achieved
449 at altitudes up to 7000 feet *PA* whichever is less, without penetration.

450 Canopy: If the canopy penetration airspeed is less than that of the windshield, it shall not
451 experience material *failures* sufficient to cause incapacitation or injury to either aircrew or
452 degrade *aircraft* performance such as to prevent safe *aircraft* control and landing after impact
453 with a 4-pound bird at the lesser of 450 KTAS or the *aircraft* maximum operational true airspeed
454 that can be achieved at altitudes up to 7000 feet *PA*.

455 **3.1.3.7.2 Airframe and Engine Inlet Bird Strike Capability**

456 The projected airframe frontal area including the engine air duct inlet(s) shall withstand the
457 impact of a 4-pound bird with *aircraft* speeds at the lesser of 450 KTAS or the *aircraft*
458 maximum operational true airspeed that can be achieved at altitudes up to 7000 feet *PA* and at
459 the most adverse temperatures, in a manner consistent with normal flight without loss of the
460 *aircraft* or incapacitation of either aircrew member.

461 **3.1.3.7.3 Hail Impact Protection**

462 The airframe shall withstand hail impact of 0.75-inch diameter on exposed surfaces, without
463 damage while on the ground. (Note: Damage is defined as deformation, delamination, tearing or
464 other structural change that would impair normal mechanical or aerodynamic performance or
465 that, if left unattended, would cause a progressively worsened condition.)

466 **3.1.3.8 Vibroacoustics**

467 All airframe *components*, systems, and subsystems shall operate in the vibroacoustic
468 environments that are commensurate with the required operational and non-operational
469 parameters and all combinations thereof without *failure*. Non-operational environments consist
470 of non-mission related time periods including, but not limited to, all ground operations and
471 maintenance.

472 **3.1.3.8.1 Aeroacoustics**

473 All airframe structure, systems, and subsystems shall withstand the aeroacoustic loads and
474 vibrations induced by the aeroacoustic loads for the service life of the *aircraft* without functional
475 impairment. For design, and uncertainty factor of +3.5 decibel (dB) shall be applied on the
476 predicted aeroacoustic sound pressure levels. For design fatigue life, a factor of 2.0 shall be
477 applied on the exposure time derived from the service life and usage of APPENDIX A.

478 **3.1.3.8.2 Vibration**

479 The airframe structure, systems, and subsystems shall operate in the vibration environments that
480 are commensurate with the required parameters of section 3.1.3 and all combinations thereof.
481 Vibration sources include but are not limited to engine operation and aerodynamic disturbances.
482 The airframe structure, systems, and subsystems shall be designed such that responses to
483 vibratory loads do not result in fatigue cracking, interference, chafing, premature wear, loss of
484 retention, or loss of mission functionality.

485 3.1.3.8.3 Aeroelastic Stability (Flutter and Divergence)

486 The *aircraft* shall have no flutter, divergence, and other dynamic aeroelastic or aeroservoelastic
487 instabilities at all speeds up to $1.15 V_L$ for all conditions. In addition, the total (aerodynamic plus
488 structural) in-flight damping coefficient at all speeds up to V_L , for any critical flutter mode or any
489 significant dynamic response mode, shall be 3% (0.03).

490 3.2 Avionics**491 3.2.1 Communications****492 3.2.1.1 Multi-Band Radios**

493 The *aircraft* shall provide for simultaneous and independent communication on at least two
494 multi-band radios.

495 3.2.1.2 Ultra High Frequency (UHF) Communication

496 The *aircraft* shall provide for simultaneous two-way UHF band communication (non-secured)
497 that is interoperable with military UHF voice systems and concurrent with continuous
498 monitoring of the UHF guard frequency.

499 3.2.1.3 Very High Frequency (VHF) Communication

500 The *aircraft* shall provide for simultaneous two-way VHF band communication (non-secured)
501 that is interoperable with VHF voice systems and concurrent with continuous monitoring of the
502 VHF guard frequency.

503 3.2.1.4 Simultaneous UHF and VHF Communication

504 The *aircraft* shall provide for simultaneous two-way VHF and UHF band communications (non-
505 secured), interoperable with military and civilian voice systems.

506 3.2.1.5 Communication System Setup

507 The *aircraft* radios or mission computer shall provide both aircrew positions for manual setup of
508 and software-driven (from pre-flight mission planning/data transfer device (DTD)) loading of all
509 radio communication modes and radio frequency channel presets (at least 50 channels for each
510 UHF and VHF respectively).

511 3.2.1.6 Emergency Locator Transmitter (ELT)

512 The *aircraft* shall have a tri-band ELT.

513 3.2.2 Navigation**514 3.2.2.1 Reduced Vertical Separation Minimum (RVSM)**

515 The *aircraft* shall have flight management functions that provide for RVSM.

516 **3.2.2.2 Global Positioning System (GPS)**

517 The *aircraft* shall provide for Global Positioning System (GPS) Standard Positioning Services
518 (SPS).

519 **3.2.2.3 RNP/RNAV Navigation**

520 The *aircraft* shall comply with the following civil aviation standards for departure, en route,
521 terminal, and approach navigation: RNAV-2 / RNP-2 (en route), RNAV-1 / RNP-1 (terminal),
522 RNP-0.3, and RNP Approach (RNAV (GPS)) procedures to LPV, LP, LNAV/VNAV, and
523 LNAV lines of minima.

524 **3.2.2.4 Tactical Air Navigation (TACAN)**

525 The *aircraft* shall conduct TACAN departures, en route navigation, and approaches.

526 **3.2.2.5 Air-to-Air TACAN**

527 The *aircraft* shall conduct air-to-air TACAN ranging with other APT *aircraft* and ranging and
528 bearing with properly equipped aircraft (e.g., tankers) in support of rendezvous and formations.

529 **3.2.2.6 VHF Omni-Directional Range (VOR)/Distance Measuring Equipment (DME)**

530 The *aircraft* shall provide for the conduct of VOR and VOR/DME departures, en route
531 navigation, and approaches.

532 **3.2.2.7 Instrument Landing System (ILS)**

533 The *aircraft* shall provide for ILS Category 1 approaches.

534 **3.2.3 Surveillance**

535 **3.2.3.1 Traffic Alert and Collision Avoidance System (TCAS)**

536 The *aircraft* shall provide full TCAS II (Version 7 or later) surveillance functionality to enable
537 operations in RVSM airspace.

538 **3.2.3.2 Automatic Dependent Surveillance-Broadcast (ADS-B) Out**

539 The *aircraft* shall provide for ADS-B Out via 1090 extended squitter (1090ES).

540 **3.2.3.3 ADS-B In**

541 The *aircraft* shall provide for ADS-B In with a Cockpit Display of Traffic Information (CDTI),
542 for Traffic Information Services and include ADS-B In for Flight Information Services-
543 Broadcast (FIS-B) information.

544 **3.2.3.4 Transponder**

545 The *aircraft* shall include a transponder that provides for simultaneous operation of selective
546 identification feature (SIF) modes (Modes 1, 2, 3/A, and C), Mode S, and TCAS.

547 **3.2.3.5 Terrain Warning and Avoidance**

548 SEE APPENDIX D.

549 **3.2.4 Datalink and Network Connectivity**

550 **3.2.4.1 Embedded Training Datalink**

551 The *aircraft* shall have a National Telecommunications and Information Administration (NTIA)
552 spectrum-certifiable, two-way, line-of-sight datalink that provides multi-access network
553 connectivity for the *Embedded Training* capability in section 3.6.

554 **3.2.4.2 Connectivity Region (Local Flying Area)**

555 The datalink shall provide sufficient *link margin* and antenna coverage to maintain aircraft-to-
556 aircraft (participant-to-participant) connectivity over a distance of at least 100 NM (line-of-sight)
557 and an envelope of operation from surface to *aircraft service ceiling* (line-of-sight) during all
558 APT syllabus maneuvers and the mission profiles listed in APPENDIX A.

559 **3.2.4.3 Maximum Simultaneous Load**

560 The datalink shall have sufficient *data rate* (throughput) and no *objectionable latency* to support
561 up to 52 *aircraft* operating concurrently in any combination of single-ship and multi-ship (up to
562 8 participants) missions within the Connectivity Region of the datalink.

563 **3.2.4.4 Multiple Concurrent Missions**

564 The datalink shall provide for the conduct of independent (mutually exclusive) missions being
565 conducted concurrently within the Connectivity Region of the datalink. (Note: Mutually
566 exclusive means there is no interface allowed between missions.)

567 **3.2.4.5 Ground Based Training Systems (GBTS) Connectivity**

568 SEE APPENDIX D.

569 **3.2.4.5.1 GBTS Voice Communication**

570 SEE APPENDIX D.

571 **3.2.4.6 Ground Support Station (GSS) Connectivity**

572 SEE APPENDIX D.

573 **3.2.4.6.1 GSS Voice Communication**

574 SEE APPENDIX D.

575 **3.2.4.6.2 GSS Live Monitoring**

576 SEE APPENDIX D.

577 **Table 3-3, GSS Live Monitoring Functions and Display Presentation**

SEE APPENDIX D.

578 **3.3 Propulsion System**579 **3.3.1 Fuel Consumption**

580 The engine(s) shall have a sea-level static, standard day thrust-specific fuel consumption (TSFC),
581 uninstalled in an engine production test cell, less than or equal to the following:

- 582 a. Cruise: 0.864 lbm/lbf-hr
- 583 b. Max Dry: 0.930 lbm/lbf-hr
- 584 c. Max Afterburner: 1.980 lbm/lbf-hr (only for engine configurations with afterburner)

585 **3.3.2 Engine Starts**

586 The engine(s) shall satisfactorily make ground starts/restarts IAW section 3.3.2.4 and air
587 starts/restarts IAW section 3.3.2.5 while complying with requirements in sections 3.3.2.1 through
588 3.3.2.3 for both ground and altitude air starts.

589 **3.3.2.1 Environmental Conditions for Engine Starts**

590 The engines(s) shall start under the climatic and environmental conditions stated in section 3.9.

591 **3.3.2.2 Fuel and Oils for Engine Starts**

592 The engines(s) shall start using the fuels specified in section 3.11.1 and oils specified in section
593 3.11.2 unless specified otherwise.

594 **3.3.2.3 Thrust Demand at Start**

595 Within the engine starting limits, the engine(s) shall be capable of starting with the thrust or
596 power demand at idle or above, and within 120 seconds of the initiation of engine start, being
597 accelerated to any power request at any rate without stall and without exceedance of steady-state
598 engine limits beyond the power transient allowance for stable engine operation.

599 **3.3.2.4 Engine Ground Starts**600 **3.3.2.4.1 Ground Start Cycles**

601 The engine(s) shall be capable of three consecutive start cycle attempts with a maximum time
602 interval of 60 seconds between the completion of one cycle and the initiation of the next cycle.

603 **3.3.2.4.2 Altitude Range for Ground Starts**

604 The engine(s) shall ground start at *PA* from -2,000 to 7,000 feet.

605 **3.3.2.4.3 Wind Speed for Ground Starts**

606 The engine(s), installed in the *aircraft*, shall ground start with wind speeds up to 30 knots from
607 any direction.

608 3.3.2.4.4 Hot Temperature Soak Start

609 The engine(s) shall ground start after a 12-hour hot soak at an ambient temperature of at least
610 110° F with inlet air, fuel, and oil temperatures of at least 110° F. Following shutdown, the
611 engine(s) shall start after a re-soak period of 30 minutes with inlet air, fuel, and oil at a
612 temperature of at least 110° F.

613 3.3.2.4.5 Cold Temperature Soak Start

614 The engine(s) shall ground start after a 12-hour cold soak at an ambient temperature of -25° F
615 with inlet air, fuel, and oil temperatures at -25° F. Following shutdown, the engine(s) shall start
616 after a re-soak period of 30 minutes with inlet air, fuel, and oil at a temperature of -25° F.

617 3.3.2.5 Engine Air Starts

618 The engine(s) shall air start at *PA* from -2,000 to 25,000 feet or *aircraft service ceiling*,
619 whichever is less, and airspeeds within the *aircraft* air start envelope.

620 3.3.3 Automatic Relight

621 The engine(s) shall incorporate an automatic relight system that shall detect any flameout that
622 may have occurred and initiate a sequence for automatic recovery anywhere in the engine
623 operating envelope. Successful recovery from flameout conditions at altitudes and air speeds
624 outside of the air start envelope (described in section 3.3.2.5) may require aircrew actions to
625 complete. Once in the air start envelope, the automatic relight system shall recover from any
626 flameouts without aircrew action. The automatic relight system shall not cause engine stalls, hot
627 starts, hung starts, mechanical damage or inhibit a successful aircrew-initiated air start.

628 3.3.4 Shutdown**629 3.3.4.1 Fuel Flow Termination**

630 Upon receiving a signal from the *aircraft* for stopping, the engine(s) shall terminate fuel flow in
631 any operating condition.

632 3.3.4.2 Power Setting at Shutdown

633 Stopping of the engine from any power setting (including augmentor, if installed) or at any rate
634 shall not:

- 635 a. Result in exceedance of any Propulsion System limits.
- 636 b. Adversely impact Propulsion System durability, structural integrity or operational
637 capability.
- 638 c. Delay a satisfactory start per Technical Order operating procedures.
- 639 d. Experience any post shutdown fires.
- 640 e. Result in any damage to the engine as a result of shutting off the fuel supply by moving
641 the throttle to the shutdown position or from shutting off the fuel supply to the engine
642 inlet connection during any engine operating condition.

643 3.3.5 Stall-Free Operation

644 The engine(s) shall be stall-free throughout the flight envelope and in any combination of the
645 following:

- 646 a. Climatic and environmental conditions as stated in section 3.9.
- 647 b. *AOA* range.
- 648 c. Sideslip range.
- 649 d. Steady-state or transient conditions.
- 650 e. Engine start and shutdown.

651 3.3.6 Thrust Control

652 The engine(s) control system shall prevent the engine from exceeding any aero-thermodynamic
653 and mechanical limits. The control system shall modulate engine(s) thrust in response to *aircraft*
654 thrust request signal from cutoff to maximum power and all positions in between. The
655 relationship between thrust and *aircraft* thrust request signal shall be essentially linear, with no
656 *objectionable* hysteresis for all flight maneuvers (see APPENDIX A). The engine(s) shall
657 remain operable at throttle positions of idle and above and during thrust excursions below idle
658 when the throttle is not in the cutoff position.

659 3.3.7 Thrust Transients

660 Thrust or power requests in any sequence and at any rate for both primary and backup control
661 modes shall not result in exceeding any engine operating limit (including over speed and over
662 temperature), result in unstable operation, stall, surge, or flameout of the engine and shall not
663 cause any mechanical damage. Main combustor blowout margins shall be sufficient to protect
664 against blowouts or flameouts during any throttle movements for all operating conditions.

665 3.3.8 Thrust Stability, Droop and Overshoot

666 During steady state operating conditions in both the Primary and Secondary Control modes,
667 engine thrust fluctuations shall not exceed $\pm 1.0\%$ of 90% intermediate thrust between idle and
668 90% intermediate thrust conditions or $\pm 5.0\%$ of the thrust available at the power lever position,
669 whichever is less. During operation above 90% intermediate thrust, fluctuations shall not exceed
670 $\pm 1.0\%$ of the thrust available at that condition. During operation at idle, the engine shall be
671 stable within ± 60 rpm fan speed. During transient flight conditions, the engine(s) shall not have
672 a thrust droop below 3% of the flight condition's steady-state thrust.

673 3.3.9 Thrust Demand and Retention

674 The engine(s) shall be able to meet all *aircraft* demands without a loss in thrust-rate-of-change
675 and operability between scheduled engine removals for *Depot-Level maintenance*. The engine(s)
676 shall have thrust retention between scheduled engine removals for *Depot-Level maintenance*.
677 (Note: Thrust retention is defined as thrust not reducing below a new engine thrust level.)

678 3.3.10 Engine Fire/Overheat Indication

679 The *aircraft* shall provide an indication that warns the aircrew of an engine fire and overheat
680 condition. The engine fire/overheat indication system shall have a separate *warning* per engine

681 in each cockpit. No single point *failure* of the fire/overheat detection system shall cause the loss
682 of the fire/overheat *warning* system or prevent *warning* of the aircrew of a fire/overheat hazard.

683 **3.3.11 Engine Design Service Life**

684 The engine shall have a *design service life* of at least one-half the *aircraft design service life* of
685 8,000 hours when subjected to the design usage of APPENDIX A and the engine duty cycle in
686 accordance with MIL-STD-3024. In addition, the engine shall be able to withstand 10 hours of
687 operation at any point in the envelope for both hot and cold parts.

688 **3.3.11.1 Hot Parts Design Service Life**

689 Hot parts shall have a usable life of one-half (0.5) times the engine *design service life* specified
690 in 3.3.11.

691 **3.3.11.2 Cold Parts Design Service Life**

692 Cold parts shall have a usable life of one (1) times the engine *design service life* specified in
693 3.3.11.

694 **3.3.12 Atmospheric Liquid Water Ingestion**

695 The engine shall start and operate satisfactorily with 5% of the total airflow weight in the form of
696 water (liquid and vapor), with 50% of the liquid water entering the inlet through a segment
697 equivalent to one-third of the inlet area.

698 **3.3.13 Bird Ingestion**

699 The engine shall continue to operate and perform during and after the ingestion of birds as
700 specified in Table 3-4.

701

Table 3-4, Bird Ingestion

Bird Size	Number of Birds Note 5	Bird Velocity	Thrust/Power Setting	Percent Thrust/Power Retention	Thrust/Power Recovery Time	Damage
100 gm (3.5 oz)	Note 1	Takeoff Speed	Intermediate Power	≥ 90%	≤ 5 Sec	Blendable
100 gm (3.5 oz)	Note 1	Cruise Speed	Intermediate Power	≥ 90%	≤ 5 Sec	Blendable
100 gm (3.5 oz)	Note 1	Low Level Speed	Intermediate Power	≥ 90%	≤ 5 Sec	Blendable
100 gm (3.5 oz)	Note 1	Descent	Intermediate Power	≥ 90%	≤ 5 Sec	Blendable
1 kg (2.2 lbs)	Note 2	Takeoff Speed	Intermediate Power	≥ 75%	5 – 10 Sec	Minor
1 kg (2.2 lbs)	Note 2	Cruise Speed	Intermediate Power	≥ 75%	5 – 10 Sec	Minor
1 kg (2.2 lbs)	Note 2	Low Level Speed	Intermediate Power	≥ 75%	5 – 10 Sec	Minor
1 kg (2.2 lbs)	Note 2	Descent	Intermediate Power	≥ 75%	5 – 10 Sec	Minor
2 kg (4.4 lbs)	Note 3	Takeoff OR Low Level Speed	Intermediate Power	Note 4	N/A	Contain Failure

702 Notes:

- 703 1. One 100 gm (3.5 oz) bird per 300 cm² (46.5 in²) of inlet area plus any fraction larger than 50%
704 thereof, up to a maximum of 16 birds.
- 705 2. One 1 kg (2.2 lb.) bird per 1500 cm² (232.5 in²) of inlet area plus any fraction larger than 50%
706 thereof.
- 707 3. One 2 kg (4.4 lb.), regardless of the size of the inlet, provided the inlet is large enough to admit a 2
708 kg (4.4 lb.) bird.
- 709 4. The 2 kg (4.4lb.) ingestion should not cause an engine failure that results in damage to the *aircraft*
710 or adjacent engines. No bird ingestion should prevent the engine from being safely shutdown.
- 711 5. The 100 gm (3.5 oz) birds should be ingested at random intervals and be randomly dispersed over
712 the inlet area. Birds 1 kg (2.2 lb.) and larger should be directed at critical areas of the engine face.

713 **3.3.14 Distortion Intensity Levels**

714 The engine shall not surge, stall, flameout, or incur any damage with the steady-state or time
715 variant inlet pressure distortion levels up to limits at the aerodynamic interface plane throughout
716 the *aircraft* angle-of-attack and sideslip envelope.

717 **3.3.15 Damage Tolerance**

718 Fracture-/safety- and mission-critical engine parts shall be able to maintain adequate damage
719 tolerance in the presence of material, manufacturing, processing, and handling defects for the
720 engine *design service life* and design usage specified in 3.3.11 and APPENDIX A and the engine
721 duty cycle in accordance with MIL-STD-3024.

UNCLASSIFIED

722 **3.3.16 Ice Ingestion**

723 The engine shall operate and perform per Table 3-5, during and after ingestion of hailstones and
 724 sheet ice at the takeoff, cruise, and descent *aircraft* speeds. The engine shall not be damaged
 725 beyond field repair capability after ingesting the hailstones and ice.

726 **Table 3-5, Ice Ingestion**

Dimensions	Number	Velocity	Thrust/Power Setting	Percent Thrust/Power Retention	Thrust/Power Recovery Time	Specific Gravity
Hailstone Diameter	Note 1	Takeoff, Cruise & Descent Speeds	Takeoff, Cruise & Descent	$\geq 95\%$	≤ 5 Sec	.80 g/cm ³
Sheet Ice Various size/shape	5 pieces Note 2	Takeoff & Cruise Speeds	Takeoff & Cruise	$\geq 95\%$	≤ 5 Sec	.80 g/cm ³

Notes:

- 727 1. For inlet capture area of 0.065 m² (100 in²) the engine should be capable of ingesting one 25 mm
 728 (1.0 in) diameter hailstone. For each additional 0.065 m² (100 in²) increase of the initial capture
 729 area, supplement the first hailstone with one 25 mm (1.0 in) and one 50 mm (2.0 in) diameter
 730 hailstone.
 731 2. One piece weighing at least 0.34 kg (0.75 pounds).

732 **3.3.17 Sand and Dust Ingestion**

733 The engine shall meet all requirements of the specification during and after the sand and dust
 734 ingestion event specified herein. The engine shall ingest air containing sand and dust particles in
 735 a concentration of 53 mg sand/m³. The engine shall ingest the specified coarse and fine
 736 contaminant distribution defined in Table 3-6 for 0.5 and 1.5 hours, respectively. The engine
 737 shall operate at intermediate thrust for the specified concentration of sand and dust particles, with
 738 no greater than 10% loss in thrust or power, and 10% gain in specific fuel consumption (SFC).

739

Table 3-6, Particle Size Distribution Guidance

	Particle Size Microns (inches)	Cumulative % by Weight
Coarse Sand*	1,000 (3.94 x 10 ⁻²)	100
	707 (2.78 x 10 ⁻²)	95-99
	500 (1.97 x 10 ⁻²)	89-93
	354 (1.39 x 10 ⁻²)	77-81
	250 (9.84 x 10 ⁻³)	60-64
	177 (6.97 x 10 ⁻³)	38-42
	125 (4.92 x 10 ⁻³)	18-22
	88 (3.46 x 10 ⁻³)	6-10
	63 (2.48 x 10 ⁻³)	1-5
Fine Sand**	1,000 (3.94 x 10 ⁻²)	100
	500 (1.97 x 10 ⁻²)	85-90
	250 (9.84 x 10 ⁻³)	70-75
	125 (4.92 x 10 ⁻³)	50-55
	75 (2.95 x 10 ⁻³)	25-30
	<75 (2.95 x 10 ⁻³)	10-15

740 * Composition is crushed quartz (SiO₂).741 ** Composition is 60% quartz (SiO₂), 26% gypsum (hydrated CaSO₄), 12% calcite (CaCO₃), and 2%
742 soluble salts. Soluble salts shall all be <75 microns in particle size.743 **3.4 Vehicle Subsystems**744 **3.4.1 Fuel Subsystem**745 **3.4.1.1 Pressure Refuel and Defuel**746 The *aircraft* shall have single point pressure refueling and single point pressure defueling
747 through MIL-A-25896 servicing adapters.748 **3.4.1.2 Gravity Refuel and Defuel**749 The *aircraft* shall be capable of being gravity refueled and gravity defueled.750 **3.4.1.3 Fuel Transfer**751 The *aircraft* shall provide for automatic transfer of all the usable fuel to the engine(s) without
752 action by the aircrew to control fuel sequencing while remaining within the allowable range of
753 gross weight, balance, and center of gravity limits.754 **3.4.2 Aerial Refueling Subsystem Growth Path (Receiver)**755 The *aircraft* shall provide a growth path and have adequate performance margins for the
756 installation of a fully integrated receptacle aerial refueling system that will enable it to aerial
757 refuel as a receiver during day and night operations from USAF KC-135 and KC-10 tanker boom
758 systems using North Atlantic Treaty Organization (NATO) Allied Tactical Publication (ATP)
759 3.3.4.2 (Chapter 2) procedures and with the KC-46 tanker boom system. The growth path and
760 adequate performance margins shall include, but are not limited to, sufficient allocations in fuel
761 on-load rate, physical space, added system weight, electrical power demand, hydraulic power

762 demand, and cooling. The *aircraft* growth path shall permit the *aircraft* to be aerial refueled
763 from 15% fuel capacity to maximum fuel capacity or to its maximum in-flight gross weight
764 (whichever is least) in less than 8 minutes. The installation of a receptacle refueling system shall
765 not require significant structural modifications or movement/redesign of other systems and
766 subsystems. The projected location of the receptacle shall result in the following:

- 767 a. *Aircraft handling qualities* shall be adequate to perform the aerial refueling process up to
768 and including the contact-uncoupled position.
- 769 b. In *common atmospheric disturbances*, *aircraft* handling quality ratings shall be no worse
770 than Level 1 (*Satisfactory*) and exhibit no *PIO* within the receiver's refueling
771 envelopes/capabilities behind the KC-10, KC-135, and KC-46, defined below for each
772 tanker, for all air vehicle normal states.
- 773 c. In *calm air*, the overall probability of exhibiting Level 2 (*Tolerable*) *flying qualities* due
774 to one or more *failures* shall be less than 10^{-3} per flight hour within the Region of
775 Satisfactory Handling (ROSH), and the overall probability of degrading to Level 3
776 (*Controllable*) *handling qualities* due to one or more *failures* shall be less than 10^{-4} per
777 flight hour within the ROSH.
- 778 d. In *uncommon atmospheric disturbances*, *flying quality* ratings shall be no worse than
779 Level 2 (*Tolerable*) and *PIO* Rating 2 (as defined in MIL-STD-1797B, Figure 19) within
780 the ROSH for all Air Vehicle States (Normal, Extreme, and Failure States). The overall
781 probability of Level 3 (*Controllable*) *flying qualities* shall be less than 10^{-4} per flight
782 hour in all conditions. If the Failure Mode, Effects and Criticality Analysis (FMECA)
783 shows that a series yaw damper *failure* is critical, then lateral-directional *flying qualities*
784 shall be no worse than Level 2 (*Tolerable*) following *failure*.
- 785 e. Each aircrew shall be capable of monitoring the information provided by the tanker's
786 Pilot Director Lights from the pre-contact position to the contact-uncoupled position and
787 when connected, throughout the tanker boom system's disconnect envelope.
- 788 f. Receiver shall not cause the tanker's flight stability and control to be inadequate during
789 the aerial refueling process (from pre-contact position, contact position and when
790 connected, throughout the tanker boom system's disconnect envelope).
- 791 g. Boom operator visibility of the "receptacle location" and its surrounding area shall be
792 adequate while the *aircraft* is in the contact-uncoupled position.
- 793 h. The receiver shall not cause the boom stability to be inadequate such that the tanker
794 boom operator cannot effectively and safely maneuver the boom to and from the
795 receptacle during contact/disconnect sequences in the aerial refueling process.
- 796 i. The entire boom envelope for each targeted tanker shall be able to be used while
797 maintaining adequate clearance between the *aircraft* and the tanker/tanker's boom.
- 798 j. Noise levels created during aerial refueling process shall not be so excessive as to
799 interfere with aircrew duties.
- 800 k. Boom path to/from contact-uncoupled position shall not impact *aircraft* flight control
801 system, engine, and other subsystems.

802 (Note: Growth path is defined as the designs, plans, margins, and capacities exist for the
803 following: primary structure, Group A *components* and wiring, hydraulic power, pneumatic
804 power, electrical power and cockpit accommodations for controls. For *aircraft* configurations
805 fully integrating aerial refueling capability (3.4.2.1), the intent is that the growth path and

806 performance margins will be utilized/consumed in the implementation of the objective
807 requirement.)

808 **3.4.2.1 Aerial Refueling Subsystem Full Integration (Receiver)**

809 SEE APPENDIX D.

810 **3.4.3 Environmental Control Subsystem (ECS)**

811 The *aircraft* shall have a self-contained ECS that provides temperature, humidity, ventilation,
812 and pressurization control to cockpit, *components*, and airframe. The ECS shall also meet
813 specified performance during *aircraft* airborne and ground operations, and in the climatic
814 environment in which the *aircraft* is intended to operate (see section 3.9).

815 **3.4.3.1 Heating Performance (Cold Soak)**

816 During ground operations, after a 12-hour cold soak at an ambient temperature of -25° F, with
817 canopy closed, engine(s) running (simultaneous auxiliary power unit (APU) operation is
818 acceptable), outside ambient temperature of -25° F, and ECS set at predefined temperature
819 setting, the ECS shall perform as follows:

- 820 a. At 5 minutes of ECS operation, *pilot envelope temperature* shall be at least 5° F.
- 821 b. At 10 minutes, *pilot envelope temperature* shall be at least 35° F.
- 822 c. At 15 minutes, *pilot envelope temperature* shall be at least 60° F.

823 **3.4.3.2 Cooling Performance (Hot Soak)**

824 During ground operations, after a 12-hour hot soak at an ambient temperature of 110° F, with
825 canopy closed, engine(s) running (simultaneous APU operation is acceptable), outside ambient
826 temperature of 110° F, and ECS set at predefined temperature setting, the ECS shall perform as
827 follows:

- 828 a. At 5 minutes of ECS operation, *pilot envelope temperature* shall be less than 90° F.
- 829 b. At 8 minutes, *pilot envelope temperature* shall be less than 85° F.
- 830 c. At 15 minutes, *pilot envelope temperature* shall be no greater than 80° F.

831 **3.4.3.3 Temperature Range**

832 During airborne operations, *pilot envelope temperature* range shall be maintained between 60°
833 and 80° F.

834 **3.4.3.4 Temperature Variation**

835 During airborne and ground operations, the ECS shall provide sufficient air distribution so that
836 the maximum temperature variation between any two measurement points in the *pilot envelope*
837 *temperature* is less than 10° F.

838 **3.4.3.5 ECS Controls**

839 The ECS shall have synchronized temperature control (set point) between cockpits and be
840 adjustable at each aircrew position.

841 3.4.3.6 ECS Alerts

842 The *aircraft* shall provide visual and audible *warnings/cautions/advisories* when the ECS is
843 operating outside of limits, including the following:

- 844 a. Problems with heating/cooling supply air or when operating on alternate cooling
- 845 b. When the cockpit *pressure altitude* is out-of-limits for the *aircraft* operating altitude.

846 3.4.3.7 Anti -Fog -Frost & -Ice

847 The *aircraft* shall maintain the canopy and windscreen surfaces (interior and exterior) free of
848 fog, frost and ice for all ground and airborne operating conditions and provide provisions to
849 prevent overheat of the transparency surfaces.

850 3.4.3.8 Equipment Cooling

851 The ECS shall provide cooling to avionics *components* during maximum ambient temperatures
852 while maintaining cockpit pressurization and cooling requirements. The provided cooling air
853 shall be consistent with equipment design specifications.

854 3.4.3.9 Alternate Cooling

855 The ECS shall provide alternate cooling method(s) to the *components* and cockpit in the event of
856 *failure* of the normal cooling method. The alternate cooling method(s) shall provide safe
857 operating temperatures for flight critical *components*.

858 3.4.3.10 Cockpit Pressurization

859 During airborne operations, the ECS shall limit the maximum rate of pressure change to 0.2
860 psi/second during normal operation and 0.5 psi/second during emergency operation. During
861 airborne operations, the ECS shall provide a cockpit pressurization schedule as follows:

- 862 a. Unpressurized from sea level to 8,000 feet *PA*.
- 863 b. 8,000 feet isobaric *PA* between 8,000 and 23,000 feet *PA*.
- 864 c. 5.0 psi differential between atmospheric pressure above 23,000 feet *PA*.

865 3.4.3.11 Air Contamination

866 The ECS shall not introduce noxious and toxic contaminants to the cockpit during normal
867 operating conditions (and single *failure* for dual ECS configurations). The *aircraft* shall have
868 provisions to shut off all air flow to prevent excessively hot air, smoke, fumes, toxic gases, and
869 other contaminants from entering the cockpit. Fresh air ventilation for contaminant and odor
870 removal shall be available to each cockpit.

871 3.4.3.12 Bleed Air Ducting (if utilized)

872 The bleed air ducting shall withstand *aircraft* structural deflection resulting from maximum G
873 maneuvers. The bleed air ducting shall withstand conditions resulting from maximum thermal
874 expansion. The *aircraft* shall provide bleed air leak detection. The *aircraft* shall provide bleed
875 air shutoff capabilities as close to the pressure source as possible.

876 **3.4.3.13 Moisture Control**

877 The ECS shall control cooling air to prevent condensation and moisture contamination of forced
878 air cooled equipment. The ECS shall control entrained moisture of cooling air to prohibit water
879 droplets and fog from entering the cockpit.

880 **3.4.4 Braking**

881 The *aircraft* shall have an anti-skid braking subsystem with the capability to stop the *aircraft* on
882 an 8,000-foot runway under the conditions defined in section 3.1.2.8 for takeoff and section
883 3.1.2.9 for landing without the use of a drag chute.

884 **3.4.4.1 Parking Brake**

885 The *aircraft* shall have a parking brake.

886 **3.4.5 Electrical Power Subsystem**

887 The *aircraft* shall have a self-contained primary electrical power subsystem compatible with
888 MIL-STD-704 that provides sufficient power IAW MIL-E-7016 with Amendment 1 (without use
889 of APU) for simultaneous operation of all *aircraft* systems and subsystems required during a
890 given phase of operation, airborne and ground, and in any climatic environment in which the
891 *aircraft* is intended to operate.

892 **3.4.5.1 Power Source Switching**

893 All flight-critical electric utilization *components* shall operate without degradation or re-
894 initialization when supplied power in accordance with MIL-STD-704 during normal, abnormal,
895 emergency, or transfer operation, including transfers from external power. The *embedded*
896 *training* subsystem shall operate without degradation or re-initialization when supplied power in
897 accordance with MIL-STD-704 during normal or transfer operation, including transfers from
898 external power.

899 **3.4.5.2 External Power Compatibility**

900 The electrical power subsystem shall operate under external power supplied IAW SAE-
901 ARP5015.

902 **3.4.5.3 External Power Receptacle**

903 The *aircraft* shall provide an external power receptacle IAW SAE-AS90362 that is accessible by
904 ground personnel without use of support equipment, to include while the engine(s) is running.

905 **3.4.5.4 Emergency Power**

906 In the event primary power is unavailable, the *aircraft* shall have an emergency power source
907 that provides for continued safe flight operations with power to not less than one multi-band
908 radio, *intercommunications control system (ICS)*, fire warning light(s), emergency lighting, and
909 backup flight instruments (airspeed, altitude, vertical velocity, three-axis attitude, and magnetic
910 heading) at both aircrew positions for not less than 30 minutes to enable safe landing under

911 Instrument Meteorological Conditions (IMC). Power provided to flight-critical equipment shall
912 be uninterruptable when transitioning to emergency power.

913 **3.4.5.5 Aircraft Start-Up**

914 The *aircraft* shall include a power source with sufficient capacity to provide self-energizing of
915 *aircraft* electrical systems and *components* necessary to monitor engine(s) start (as a minimum:
916 engine instrumentation, APU/Jet Fuel Starter (JFS) instrumentation if applicable, *caution* and
917 *warning* indications, and ICS/UHF/VHF communication) and start the *aircraft* engine(s) (at least
918 2 engine start attempts at 0° F and at least 2 start attempts at 110° F), without the use of external
919 ground support equipment.

920 **3.4.5.5.1 External Electrical Power**

921 The engine(s) shall also be capable of starting with external power connected to the *aircraft*.

922 **3.4.5.6 Electrical Wiring Interconnection**

923 The electrical wiring interconnection system shall be designed and installed in accordance with
924 SAE-AS50881.

925 **3.4.6 Hydraulic Subsystem (if utilized)**

926 The hydraulic system shall be sized to meet the demand resulting from the use of simultaneously
927 operating *components*.

928 **3.4.6.1 Hydraulic System Redundancy**

929 The hydraulic system shall be designed to maintain Level 2 (*Tolerable*) *flying qualities* after any
930 single hydraulic system *failure*.

931 **3.4.6.2 Hydraulic System Integrity**

932 The hydraulic system shall be designed to withstand proof and burst pressures as defined in
933 SAE-AS5440, paragraph 3.6.3.1. The hydraulic system shall be designed to preclude surge
934 pressures as defined in SAE-AS5440, paragraph 3.6.3.

935 **3.5 Crew Systems**

936 **3.5.1 Human Performance and Human Engineering**

937 The *aircraft* controls, displays, access panels, and all other human-machine interfaces shall be
938 developed, and designed from a human-centered approach that considers the physical, cognitive
939 and sensory skills, capabilities, and limitations of the personnel who operate, support, maintain,
940 and train on the system, IAW the human engineering criteria of MIL-STD-1472, as applicable.
941 (Note: MIL-STD-1472 tailoring for applicability will be mutually agreed to/approved by the
942 program office and recorded via Contract Data Requirements List (CDRL).)

943 **3.5.2 Cockpit Configuration**

944 Each cockpit shall provide for aircrew to independently operate and control the *aircraft* through
 945 all phases of flight, and to individually perform all actions necessary to recover the *aircraft*, to
 946 include engine shut down and emergency landing gear extension (e.g., either aircrew
 947 incapacitated situation).

948 **3.5.2.1 Cockpit Commonality**

949 The configuration, location, and actuation of all controls and displays that are common between
 950 cockpits shall be identical in each cockpit, to the maximum extent possible.

951 **3.5.3 Cockpit Stowage**

952 Each cockpit shall provide storage space that measures a minimum of 4 inches in width, 12
 953 inches in length and 12 inches in height; that is within reach of the aircrew; and that secures
 954 personal gear consisting of one empty helmet bag and one flight publications bag, during all
 955 expected training maneuvers (see APPENDIX A).

956 **3.5.4 Safety Devices and Streamers**

957 Safety devices (pins, clips, locks, etc.) shall be used to safe critical *components*. All removable
 958 safety devices shall have streamers. Stowage for cockpit safety devices shall be provided in each
 959 cockpit.

960 **3.5.5 Aircrew Physical Anthropometrics**

961 The cockpit, including the escape, system shall accommodate (see section 3.5.6, Anthropometric
 962 Accommodation) the anthropometric range defined in Table 3-7 and Table 3-8, while wearing
 963 the USAF-required personal flight equipment listed in Table 3-16. (Note: The anthropometric
 964 range is defined as multivariate anthropometric cases 1-7 and will be used for meeting the reach
 965 requirements as defined in section 3.5.7.)

966 **Table 3-7, Anthropometric Cases 1-7**

Attribute	Case 1	Case 2	Case 3	Case 4	Case 5	Case 6	Case 7
Thumb tip reach*	27.0	27.6	33.9	29.7	35.6	36.0	26.1
Buttock-knee length*	21.3	21.3	26.5	22.7	27.4	27.9	20.8
Knee-height sitting*	18.7	19.1	23.3	20.6	24.7	24.8	18.1
Sitting height*	32.8	35.5	34.9	38.5	40.0	38.0	31.0
Eye height sitting*	28.0	30.7	30.2	33.4	35.0	32.9	26.8
Shoulder height *sitting	20.6	22.7	22.6	25.2	26.9	25.0	19.5
Shoulder breadth range*	14.7 - 18.1	16.4 - 20.6	16.2 - 21.2	16.8 - 21.7	16.9 - 22.6	16.8 - 22.5	14.2 - 18.0
Chest depth range*	7.4 - 10.9	6.9 - 10.6	7.2 - 11.3	7.1 - 11.0	7.3 - 12.1	7.4 - 12.2	7.2 - 10.2

Thigh circumference range*	18.5 -25.0	17.1 - 25.0	20.2 - 27.6	17.6 - 26.3	18.6 - 29.2	19.1 - 29.7	17.8 - 25.2
Weight (nude)	103 – 245 lbs.						

967 *Measured in inches

968 **Table 3-8, Anthropometric Cases 1-7 (Additional Characteristics)**

Attribute	Measurement Range
Forearm to forearm breadth (seated)	15.4 - 28.1 inches
Hip breadth (seated)	12.3 - 20.0 inches
Shoulder to elbow length (arm flexed)	11.5 - 16.7 inches
Elbow to fingertip length (arm flexed)	15.0 - 22.6 inches
Buttock to popliteal fossa length (leg flexed)	16.5 - 23.5 inches
Popliteal height sitting	12.8 - 19.9 inches
Boot size (U.S.)	5 - 13
Abdomen Depth	6.4 - 14.8 inches
Hand Length	6.2 - 8.9 inches
Hand Breadth	2.6 - 4.0 inches

969 **3.5.6 Anthropometric Accommodation**

970 The cockpit shall meet the following criteria for anthropometric accommodation, while wearing
971 the USAF-required personal flight equipment listed in Table 3-16:

- 972 a. Reach and strength to operate all controls and displays, under the appropriate conditions.
973 b. Reach, strength, and clearance to achieve the full operational range of the rudders,
974 throttles, brakes, and control stick. Full operational range is defined as the range of
975 control motion required to accomplish all APT syllabus maneuvers and the mission
976 profiles (see APPENDIX A), recover from all common student errors, and recover from
977 all unusual attitudes.
978 c. Clearance to safely escape or eject without striking cockpit or other *aircraft* structures
979 (reference section 3.5.20.5, Ejection Seat Clearance).
980 d. Room to allow proper body posture before ejection.
981 e. Capability to safely eject the specified aircrew weight range and anthropometric cases
982 (Table 3-7, Anthropometric Cases 1-7 and Table 3-8, Anthropometric Cases 1-7
983 (Additional Characteristics)) while meeting the requirements of section 3.5.20.
984 f. Room to allow movement for visual checks (e.g., directly behind and above the *aircraft*).
985 g. Internal vision to perform all flight tasks, including, but not limited to, the ability to see
986 all instruments, displays (including all *head-up type display* symbology with aircrew
987 seated in the *Zone 1 Reach Conditions*), *cautions*, and *warnings*.
988 h. External vision as described in section 3.5.17.2.

989 **3.5.7 Cockpit Reach**

990 For the anthropometric range of aircrew member population contained in section 3.5.5, the
 991 cockpit shall be configured to allow operation and reach to the controls listed in Table 3-9 and
 992 Table 3-10 for *Zone 1 Reach Conditions* and *Zone 2 Reach Conditions*, respectively. All other
 993 required in-flight operation and reach of controls not contained in *Zone 1 Reach Conditions* and
 994 *Zone 2 Reach Conditions* shall be capable of being performed for *Zone 3 Reach Conditions*.

995 **Table 3-9, Zone 1 Required Controls**

All primary and secondary in-flight escape system controls
Throttle, Full Operational Range (Idle to Mil Power)
Rudder Pedals, Full Operational Range
Control Stick, Full Operational Range
Inertial lock manual selector
Recoupling Flight Controls Switch (for <i>aircraft</i> implementing flight control decoupling function of rear <i>Hands-On Throttle and Stick (HOTAS) controls</i> , section 3.5.14.1.4)

996 **Table 3-10, Zone 2 Required Controls**

Throttle, Full Operational Range (Idle to Afterburner, if installed)
Flap Controls
Landing gear controls
Life Support Connections
Emergency Ground Egress Controls
Any other control expected to be used during Safety Critical Emergency Procedure(s)

997 **3.5.8 Aircrew Workload**

998 Aircrew workload associated with all aircrew interfaces shall be maintained below a level 7 on
 999 the Bedford Workload rating scale under all aircrew tasks to include *embedded training* tasks,
 1000 and all APT syllabus maneuvers and the mission profiles (see APPENDIX A).

1001 **3.5.9 Aircrew Alerting**

1002 The *aircraft* shall contain an aircrew alerting system that provides the aircrew at both aircrew
 1003 positions with identical *warnings*, *cautions*, and *advisories* (WCA) for *component(s) failures*,
 1004 system degradations, and potentially hazardous changes in system status/position in accordance
 1005 with MIL-STD-411 and MIL-STD-1472, as applicable. (Note: MIL-STD-1472 tailoring for
 1006 applicability will be mutually agreed to/approved by the program office and recorded via
 1007 CDRL.)

1008 **3.5.9.1 Prioritization of Alerts**

1009 When two or more *alert* situations occur simultaneously, the presentation of audio *alerts* and
 1010 corresponding visual *alerts* shall be prioritized in accordance with MIL-STD-411, such that

1011 higher priority is given to the situation that requires a more immediate response, to ensure the
1012 safety of the *aircraft*.

1013 **3.5.9.2 Master Warning/Master Caution**

1014 Both aircrew positions shall have identical master *warning* and master *caution* located within a
1015 30° cone of the aircrew's forward line of sight.

1016 **3.5.9.3 Aural and Visual Alerts**

1017 All aural *alerts* shall contain an associated visual indication of the alerting condition.

1018 **3.5.9.4 Aural Signals for Warning Alerts**

1019 *Warning alerts* shall contain a distinctive aural signal differentiating it from other *cautions*,
1020 *advisories* or *alerts*.

1021 **3.5.10 Intercommunications Control System (ICS)**

1022 **3.5.10.1 External Communication**

1023 The *ICS* shall provide both aircrew positions access to UHF and VHF radio communications
1024 during all ground and airborne operations.

1025 **3.5.10.2 Aircrew Communication**

1026 The *ICS* shall include an *interphone* to allow each aircrew to communicate with one another
1027 during all ground and airborne operations.

1028 **3.5.10.3 Ground Communication**

1029 The *ICS* shall include an *interphone* to allow each aircrew to communicate with ground
1030 personnel during all ground operations.

1031 **3.5.10.4 Radio Attenuation**

1032 The *ICS* shall provide for both aircrew positions to attenuate incoming UHF and VHF
1033 communications while maintaining *interphone* communications.

1034 **3.5.10.5 ICS Stations**

1035 The *ICS* shall include control interfaces at each aircrew position and one external interface
1036 accessible by ground personnel for launch and recovery of the *aircraft*.

1037 **3.5.10.6 ICS Controls**

1038 The *ICS* shall include controls for adjusting volume levels and for microphone operations to
1039 include selecting and deselecting internal/external communications and navigation aids.

1040 **3.5.10.7 Microphone Operations**

1041 The *ICS* shall provide for *hot-mic* and *cold-mic* operations at both aircrew positions.

1042 **3.5.10.8 Aircrew and Ground Personnel Acoustic (Speech) Intelligibility**

1043 The *aircraft* shall have an *ICS* that provides acceptable aircrew and ground personnel acoustic
 1044 (speech) intelligibility for all required communications during all phases of flight and *aircraft*
 1045 configurations. Table 3-11 defines the acceptable percent of speech intelligibility correct scores
 1046 (adjusted for guessing) for aircrew and ground personnel. (Note: Intelligibility is defined as the
 1047 ability to hear and understand voice communications in the noise environment as defined by the
 1048 Modified Rhyme Test (MRT) in accordance with ANSI/ASA S3.2-2009.)

1049 **Table 3-11, Speech Intelligibility**

External Pink Noise Overall Pressure (dB)	Noise, % Corrected MRT Level, Adjusted for Guessing
95	90
105	85
115	80
>115	80

1050 Table 3-12, below, expands Table 3-11 for listener noise environment sound pressure levels
 1051 >115 dB for ground personnel environments. Table 3-12 defines the acceptable percent of speech
 1052 intelligibility correct scores (adjusted for guessing) for ground personnel.

1053 **Table 3-12, Additional Speech Intelligibility for Maintainers**

Talker External Pink Noise Overall Pressure Level (dB)	Listener External Pink Noise Overall Pressure Level (dB)	% Correct MRT, Adjusted for Guessing
65 or less	120	80
120	65 or less	80

1054 **3.5.11 Cockpit Controls**1055 **3.5.11.1 Throttle Detent**

1056 The *aircraft* shall provide detents representing throttle position to aid in fuel consumption
 1057 awareness and training.

1058 **3.5.11.1.1 Afterburning Aircraft**

1059 For *aircraft* utilizing afterburner, there shall be a detent for the mil power position and a full
 1060 forward stop position to indicate maximum power and afterburner usage.

1061 **3.5.11.1.2 Non-afterburning Aircraft**

1062 For *aircraft* not utilizing afterburner, there shall be an adjustable detent between midrange and
 1063 maximum power, representing a mil power setting and a forward stop indicating full maximum
 1064 power that represents afterburner usage. Advancing the throttle just beyond the mil power detent
 1065 to simulated min afterburner shall result in a minimum 5% increase in thrust. The detent
 1066 feedback mechanism shall be adjustable by maintenance personnel.

1067 3.5.11.2 Side-Arm (Side Stick) Control Stick Forearm Support

1068 Side-arm (Side stick) controller configured *aircraft* shall include forearm support with
1069 adjustability, if necessary, to meet JPATS Cases 1 - 7, to minimize fatigue and maximize
1070 performance.

1071 3.5.11.3 Rudder Control Forces

1072 Within the operational range, the maximum forces that the aircrew member must exert for full
1073 control authority of the rudder controls with all systems operating normally shall not exceed 150
1074 lbs. force for temporary rudder application and 20 lbs. force for prolonged rudder application.
1075 The operational range is defined as the range of control motion required to perform the APT
1076 mission, including all APT Syllabus maneuvers and recovery from all common student errors.

1077 3.5.11.4 Landing Gear Control

1078 The normal and emergency landing gear controls shall be designed in accordance with MIL-
1079 STD-203G, paragraph 5.1.9.

1080 3.5.11.5 Emergency Controls**1081 3.5.11.5.1 Accessibility**

1082 In addition to the reach requirements in section 3.5.7, all emergency controls shall be readily
1083 accessible and shall be contained in each cockpit (i.e., a complete set of emergency controls are
1084 contained in both aircrew positions).

1085 3.5.11.5.2 Inadvertent Actuation

1086 The *aircraft* shall include provisions to guard against accidental activation of emergency systems
1087 or controls.

1088 3.5.11.5.3 Markings

1089 Emergency control markings shall be in accordance with FED-STD-595.

1090 3.5.12 Interior Finishes, Components and Equipment**1091 3.5.12.1 Dimensional Stability**

1092 All interior finishes, *components*, equipment, and materials shall maintain dimensional stability
1093 for temperatures specified in section 3.9.1.1 without deforming, warping or distorting.

1094 3.5.12.2 Fire Resistance

1095 All interior finishes, *components*, and equipment shall be made with burn resistant materials.

1096 3.5.13 Thermal Contact Hazards

1097 The *aircraft system* which exposes personnel during normal operations (i.e. with personnel at
1098 normal work stations without maintenance access points open) to surface temperatures greater
1099 than those shown in Table 3-13, or less than 0° C, shall be guarded.

1100

Table 3-13, Thermal Contact Hazards

Exposure	Metal	Glass	Plastic or wood
Momentary contact	60° C (140° F)	68° C (154° F)	85° C (185° F)
Prolonged contact or handling	49° C (120° F)	59° C (138° F)	69° C (156° F)
Based on an ambient environment at 25° C (77° F)			

1101 **3.5.14 Cockpit Displays**1102 **3.5.14.1 Large Area Display (LAD)**

1103 The *aircraft* shall provide at least one *large area display (LAD)* in each cockpit with the same
1104 functionality and capability to display the same information.

1105 **3.5.14.1.1 Viewable Area**

1106 The *LAD* size shall provide a viewable area of at least 150 square inches.

1107 **3.5.14.1.2 Configurable Display**

1108 The *LAD* shall be configurable, manually and from pre-flight mission planning, to enable the
1109 aircrew to place display presentations in aircrew selected locations on the *LAD* screen. Primary
1110 flight reference and any safety-of-flight display presentations (e.g., engine monitor displays, fuel
1111 quantity displays) shall be non-configurable and when displayed on the *LAD*, shall be displayed
1112 in a dedicated location. The *LAD* shall provide for the aircrew to select and set up a range from
1113 two to six, as a minimum, simultaneous display presentations on the *LAD* from the cockpit and
1114 from pre-flight mission planning. The *LAD* shall provide for the aircrew to change the size of
1115 display presentations manually from the cockpit and from pre-flight mission planning. The
1116 display presentations shall be selectable through the *HOTAS controls*.

1117 **3.5.14.1.3 Repeater Mode**

1118 The *LAD* shall include an aircrew-selectable repeater mode that enables the other cockpit *LAD*
1119 presentation to be displayed.

1120 **3.5.14.1.4 Rear-Cockpit Interface**

1121 The *aircraft* shall provide for the aircrew at the aft position to interact with the *LAD* (and
1122 *Embedded Training* systems display presentations) via *HOTAS controls* without affecting the
1123 flight control surfaces. For configurations implementing flight control decoupling, the *aircraft*
1124 shall enable recoupling via single action within *Zone 1 Reach Conditions*.

1125 **3.5.14.1.5 Integrated Digital Checklists and Electronic Flight Information**

1126 The *aircraft* shall provide for the aircrew to select and display normal and emergency checklists
1127 on the *LAD* during normal and emergency operations. The *aircraft* shall provide for the aircrew
1128 to select and display US instrument approach procedure charts on the *LAD* during normal and
1129 emergency operations. The *aircraft* shall provide for the Digital Checklists and Electronic Flight
1130 Information to be updated without requiring an *Operational Flight Program/Software Item*
1131 (*OFPSI*) change. (Note: Paper checklist will be required as a backup.)

1132 **3.5.14.1.6 Situational Awareness Display (SAD)/Navigation Display Presentation**

1133 The *aircraft* shall provide a SAD/navigation display presentation that depicts, but not be limited
 1134 to, flight and navigational information per Table 3-14 at both aircrew positions. All
 1135 presentations shall be selectable during pre-flight mission planning and shall be cockpit
 1136 selectable at both aircrew positions.

1137 **Table 3-14, Situational Awareness Display (SAD)/Navigation Display Presentation**

- | |
|--|
| <ul style="list-style-type: none"> a. Composite presentation fused from on-board information systems (flight management information, NAVAIDS, TCAS, ADS-B, GPS, etc.) for aircrew <i>situational awareness</i>. b. Moving map with north-up and own-ship track-up orientations c. Own-ship relative position and orientation d. Own-ship range rings with variable display ranges e. Own-ship to cursor/cursor to own-ship bearing/range display f. Slewable cursor g. Planned routes, route lines, and waypoints (Both pre-planned and in-flight; Turn point, initial point) h. En route flight Information (NAVAIDS, waypoints, airways, airports, etc.) i. Airspace boundary lines |
|--|

1138 **3.5.14.2 Glove Compatibility**

1139 All electronic display interfaces shall be compatible with the aircrew gloves specified in Table
 1140 3-16, Personal Flight Equipment.

1141 **3.5.14.3 Display Readability**

1142 All electronic displays shall be *readable* under the full range of *operational lighting conditions*.

1143 **3.5.14.4 Cockpit Display Luminance**

1144 The luminance and contrast of all displays shall support aircrew operations throughout the flight
 1145 envelope and under all *operational lighting conditions*. Luminance variation of any display shall
 1146 not exceed 30%.

1147 **3.5.14.5 Display Quality and Latency**

1148 The information displayed on all displays shall be fully legible, easily interpreted, and free of
 1149 distracting artifacts such as flicker, jitter, and noise under all environmental and mission
 1150 conditions. Latency of displayed data shall be limited such that the aircrew does not perceive a
 1151 delay between control inputs and the system's response.

1152 **3.5.14.6 Head-up Type Display (HTD)**

1153 The *aircraft* shall provide in the front cockpit one *Head-up Type Display (HTD)* and in the rear
 1154 cockpit either one *HTD* mounted on *aircraft* centerline or a high-definition display repeater
 1155 positioned not lower than the *LAD* that displays the content of the front *HTD*. (Note: It is
 1156 acceptable for the high-definition display repeater to be displayed on the *LAD*.)

1157 3.5.14.7 Primary Flight Reference

1158 The Primary Flight Reference presentations on the *LAD*, the *HTD*, and the high-definition
1159 display repeater if provided, at both aircrew positions shall be endorsed through the HQ Air
1160 Force Flight Standards Agency Whitepaper: Primary Flight Reference Endorsement Process. If
1161 the *HTD* (that is not displayed on the *LAD*) is designated as the PFR, then a head down,
1162 supplementary PFR shall be, as a minimum, selectable with a single control input from the
1163 aircrew.

1164 3.5.14.8 Standby Flight Instrument

1165 The *aircraft* shall provide, at both aircrew positions, a dedicated standby flight instrument IAW
1166 MIL-STD-1787 that is located such that it can be viewed by the aircrew member with minimal
1167 head movement.

1168 3.5.14.9 Aircraft Clock

1169 The *aircraft* shall provide a digital clock in each cockpit (either integrated with the *LAD*, or
1170 stand-alone). The clock shall be displayed at all times and provide 24-hour digital display of
1171 hours, minutes, and seconds, as well as display local and Zulu time.

1172 3.5.14.9.1 Stopwatch

1173 The *aircraft* shall provide stop watch functionality at each aircrew member position integrated
1174 within the *aircraft* clock display. The stopwatch shall be capable of being displayed within one
1175 button press and shall consist of an elapsed time counter. The elapsed time counter shall be
1176 resettable and shall operate from 1 second to 99 hours and 59 minutes, with the elapsed seconds
1177 shown at all times.

1178 3.5.14.10 Symbology

1179 Cockpit displays shall use symbology IAW MIL-STD-1787, MIL-STD-411, and MIL-STD-
1180 1472, as applicable. (Note: MIL-STD-1472 tailoring for applicability will be mutually agreed
1181 to/approved by the program office and recorded via CDRL.)

1182 3.5.15 Interior Lighting

1183 The *aircraft* interior lighting system shall provide adequate illumination for all operator tasks
1184 throughout all *operational lighting conditions*.

1185 3.5.15.1 Night Vision Imaging System (NVIS) Compatibility

1186 The *aircraft* interior lighting, displays, and illuminated indicators and controls shall be
1187 compatible with MIL-STD-3009 Type I, Class B or C, as applicable, Night Vision Imaging
1188 System (NVIS).

1189 3.5.15.2 Lighting Uniformity

1190 At any given luminance level, lighting *components* within a lighting subsystem (primary
1191 instrument panel; secondary instrument panel; primary console; secondary console; *warning*,
1192 *caution*, and *advisory* signals; utility; and compartment) shall provide luminance such that the

1193 average luminance ratio between lighted *components*, in each cockpit, is no greater than 2 to 1.
1194 Luminance uniformity shall be maintained throughout the entire range of luminance control.

1195 **3.5.15.3 Brightness Control**

1196 Cockpit displays, panels, and indicators shall be adjustable for all *operational lighting*
1197 *conditions*.

1198 **3.5.15.4 Glare and Reflections**

1199 Crew station lighting shall not cause direct or indirect glare or reflection that interferes with
1200 either aircrew's interior or exterior aided or unaided vision. Glare shields and display lighting
1201 shall be used to minimize glare and reflections on the transparencies and other reflective
1202 surfaces.

1203 **3.5.15.5 Utility/Map light**

1204 Each cockpit shall contain a utility/map light.

1205 **3.5.16 Exterior Lighting**

1206 The *aircraft* shall have dual mode exterior lighting (including strip lighting) that is compatible
1207 with MIL-STD-3009 Type I, Class B or C, as applicable, night vision imaging system (NVIS),
1208 and provides for day and night formation flight in both IMC and VMC in all phases of flight in
1209 accordance with SAE-ARP5825.

1210 **3.5.16.1 FAA Interoperability**

1211 The *aircraft* exterior lighting shall be dual mode (NVIS friendly and covert) and comply with
1212 FAA regulations.

1213 **3.5.17 Interior and Exterior Visibility**

1214 **3.5.17.1 Interior Visibility**

1215 In addition to the requirements of section 3.5.6 g, all symbols, graphical and alphanumeric
1216 characters, labels, placards, etc., which must be read in-flight shall be visible and *readable* from
1217 each respective aircrew position.

1218 **3.5.17.2 Exterior Visibility**

1219 The *aircraft* shall provide a sufficient exterior field-of-view to permit each aircrew position to
1220 safely maneuver and control the *aircraft* in all phases of flight within its operating limits and to
1221 perform all flight tasks, including but not limited to the following: visibility over the nose of the
1222 *aircraft* at the worst case AOA approach, "checking-six" for air-to-air engagements, formation
1223 re-join maneuvers, aerial refueling (if implemented), and all APT syllabus maneuvers and the
1224 mission profiles (see APPENDIX A), while providing, from the same eye position, an
1225 unobstructed interior view of flight instruments and other critical *components* and displays.
1226 (Note: Interior visibility is not required for the "checking-six" procedure).

1227 3.5.17.2.1 Visibility for Landings

1228 The *aircraft* forward-azimuth, down-elevation visibility shall be sufficient for both aircrew
1229 positions to visually maintain the aim point within the runway touchdown zone on a 3-degree
1230 glide path for all *aircraft* landing configurations.

1231 3.5.18 Aircraft Transparency/Canopy System

1232 Transparency system optical characteristics shall permit the aircrew at each aircrew position to
1233 maintain sufficient visual capability for all phases of flight and flight tasks and under all relevant
1234 *operational lighting conditions* (including NVIS lighting) to maintain vehicle control and safe
1235 flight.

1236 3.5.18.1 Transparency Integration with Environmental Conditions

1237 The *aircraft* shall include provisions to sufficiently remove rain, ice, snow, and frost from the
1238 canopy for all ground and airborne operating conditions such that sufficient visibility can be
1239 maintained at each aircrew position to maintain vehicle control and safe flight.

1240 3.5.18.2 Transparency Shape Compatibility

1241 The *aircraft* transparency shape shall be compatible with (i.e., not interfere with) aircrew
1242 motions for the full range of anthropometrically qualified aircrew (see section 3.5.5) for all
1243 normal and emergency conditions and seat positions and for all APT syllabus maneuvers and
1244 mission profiles (see APPENDIX A), while wearing the personal flight equipment listed in Table
1245 3-16 and any Contractor supplied equipment, if implemented (e.g., helmet mounted devices).

1246 3.5.18.3 Transparency System Thermal Loads

1247 The transparency system shall operate normally at all temperatures consistent with the
1248 operational environment of the *aircraft* as defined in section 3.9.

1249 3.5.18.4 Canopy Opening Clearance

1250 The cockpit opening dimensions shall provide adequate clearance for aircrew member ingress
1251 and egress with personal flight equipment listed in Table 3-16.

1252 3.5.18.5 Canopy Actuation (Normal Ingress/Egress)

1253 The transparency system shall have the capability to actuate for normal ingress and egress from
1254 inside and outside the cockpit, without *aircraft* engine(s) running or external power. Both
1255 aircrew members shall have access to actuation or emergency controls.

1256 3.5.18.6 Manual Canopy Operation

1257 For *aircraft* allowing for powered canopy actuation, the transparency system shall provide a
1258 manual method that allows for canopy operation from inside and outside the cockpit, without
1259 requiring electrical power.

1260 3.5.18.7 Canopy Latching and Locking

1261 The *aircraft* shall contain independent latching and locking mechanisms such that inadvertent
1262 activation of one mechanism will not result in the operation or *failure* of the other mechanism.
1263 The locking system shall be incapable of locking unless all latches are properly latched in the
1264 fully secured position. Positive identification of canopy position and locking condition shall be
1265 visible and accessible to both aircrew members. A *warning* light shall be provided that
1266 illuminates when the canopy locking system is not fully engaged and locked.

1267 3.5.18.7.1 Canopy Open Lock

1268 The canopy system shall have positive mechanical means for ensuring the canopy remains in the
1269 open position when selected.

1270 3.5.19 Aircraft Entry and Exit

1271 The *aircraft* shall provide an entry and exit means that is self-contained to accommodate both
1272 cockpits.

1273 3.5.19.1.1 Transparency – Escape System Compatibility

1274 The transparency system shall be compatible with the *aircraft* escape system to permit safe
1275 escape in the event of an emergency.

1276 3.5.20 Escape and Egress System

1277 The *aircraft* shall have an escape system that enables both aircrew members to escape and
1278 provides a manually initiated automatic method for emergency evacuation during airborne and
1279 ground emergencies (ejection) and a manual method for normal and emergency ground egress
1280 for the full range of anthropometric cases in section 3.5.5.

1281 3.5.20.1 Escape System Reliability

1282 The minimum demonstrated reliability of the ejection seat shall be 90% at the 90% Lower
1283 Confidence Limit (LCL). The minimum demonstrated reliability for escape system integration
1284 with the *aircraft* shall be 75% at the 90% LCL. The minimum probability of success for the
1285 escape system shall be 98% at the 90% LCL.

1286 3.5.20.2 Manual Emergency Ground Egress

1287 Manual egress shall be provided for normal and emergency ground evacuation. The manual
1288 egress system shall allow manual *aircraft* evacuation of both aircrew members within 30
1289 seconds.

1290 3.5.20.2.1 Backup Emergency Ground Egress

1291 A backup method of aircrew initiated emergency ground evacuation (for situations such as
1292 canopy stuck-down) shall be through a manually initiated ground egress *escape path clearance*
1293 *system*.

1294 3.5.20.3 Escape Path Clearance System

1295 The *aircraft* shall include an *escape path clearance system*. The *escape path clearance system*
1296 shall not cause *Abbreviated Injury Scale 2 (AIS 2)* or greater injury severity or hinder required
1297 procedure steps for evacuation.

1298 3.5.20.3.1 Penetrating Injuries

1299 For systems that use an explosive cutting system to clear the escape path, debris caused by
1300 functioning of the cutting system shall not penetrate more than 0.5” into ballistic witness gelatin
1301 positioned at the distance equal to the distance from the cutting system to the crew’s neck, while
1302 seated in the ejection seat.

1303 3.5.20.3.2 Impulse Noise

1304 The *escape path clearance system* shall not expose the aircrew to peak pressure levels of impulse
1305 noise greater than 190 dBP of the vector sum of the sound pressure level measurements taken
1306 from the x, y, and z directions, outside of the helmet, at each aircrew position. For noise
1307 exposures in which the peak pressure level is 140 dBP or greater, as measured at the ear canal
1308 (inside the helmet) or external to the helmet using the helmet impulsive peak insertion loss at
1309 each aircrew position, the $L_{IAeq100ms}$ shall not exceed 85 dB, as calculated IAW MIL-STD-1474,
1310 Section B.5.3.4.1, Equation 3a.

1311 3.5.20.3.3 Thermal Energy Exposure Limits

1312 Aircrew member’s exposure to thermal energy as a result of escape system utilization by the
1313 *aircraft* occupants or rescue personnel shall not exceed a burn depth of 100 microns.

1314 3.5.20.3.4 Escape Path Clearance Considerations

1315 Actuation of the manual *escape path clearance system* shall not cause the ejection seat to fire nor
1316 inhibit a subsequent emergency ejection.

1317 3.5.20.4 External Controls

1318 Emergency egress system shall include external emergency controls for cockpit access that can
1319 be operated by ground personnel during non-crash ground emergencies to allow manual
1320 initiation of the ground egress *escape path clearance system*.

1321 3.5.20.5 Ejection Seat Clearance

1322 The cockpit closure shall allow for a clear escape path for the ejection seat and the full range of
1323 anthropometric cases in section 3.5.5. There shall be no projections such as the throttle, landing
1324 gear control, instrument panel, canopy frame, etc., into the ejection seat envelope that would
1325 interfere with the safe ejection of the seat and crew member. The escape path envelope shall
1326 comprise a forward minimum clearance line, parallel to the ejection path, and measured
1327 perpendicularly to the plane of the seat back that allows for a minimum 2.5 inches clearance
1328 between the aircrew’s knees and the nearest forward obstruction for all anthropometric cases and
1329 applicable seat positions and a ± 15 inch lateral clearance from the seat centerline. The maximum
1330 allowable radii of the forward corners of the envelope shall be 6 inches.

1331 **3.5.20.6 Safing of Emergency Controls**

1332 A means shall be provided to safe the ejection seat and the *escape path clearance system* prior to
1333 ingress and egress of each cockpit and while seated in the cockpit. A visual means of
1334 determining that the ejection seat and *escape path clearance systems* are safe prior to ingress and
1335 egress, and while seated in the cockpit shall be provided.

1336 **3.5.20.6.1 Secondary Seat Safety Device**

1337 The ejection seat shall include a Safe/Armed lever. The Safe/Armed lever shall be a secondary
1338 means to safe the ejection seat for use in cases when installing the primary ejection seat safety
1339 device would be impractical or unsafe. The Safe/Armed lever shall be located on each ejection
1340 seat and in a location that is readily accessible by the crew and shall be compatible with the full
1341 range of anthropometrically qualified aircrew, as specified in section 3.5.5. The Safe/Armed
1342 lever shall be prohibited from being put into the ARMED position, when the primary ejection
1343 seat safety device is installed. The *aircraft* shall provide a “seat not armed” visual indication
1344 (e.g., *caution* light) at the aircrew’s own position at all times until the seat is ARMED. The
1345 *aircraft* shall provide an aural indication when the throttle is advanced to within 20% of takeoff
1346 thrust setting when either seat is not ARMED (when in SOLO configuration the rear seat is
1347 removed from the above logic, see section 3.5.20.7.5.1).

1348 **3.5.20.7 Manually Initiated Automatic Escape**

1349 A manually initiated automated escape system capable of safely ejecting a crew member with a
1350 nude weight range of 103 to 245 lbs. with full personal flight gear and survival kit (per section
1351 3.5.21.1 and section 3.5.21.3, respectively) including conditions with and without Helmet
1352 Mounted Devices (e.g., Helmet Mounted Display, Night Vision Goggles) shall be provided. The
1353 ejection system shall not exceed a 1% chance of a major spinal injury during the ejection catapult
1354 stroke (see section 3.5.20.10.1) and a 5% chance of an incapacitating injury during the entire
1355 ejection profile (see section 3.5.20.10.2, section 3.5.20.11, and section 3.5.20.12) for the full
1356 range of anthropometrically qualified aircrew (see section 3.5.5) over land and water from 0 feet
1357 AGL to *aircraft absolute ceiling* and 0 KEAS to 600 KEAS or max speed of the *aircraft*,
1358 whichever is less.

1359 **3.5.20.7.1 Escape Envelope**

1360 Upon actuation of the automated escape system, the escape system shall function properly under
1361 all combinations and timing of aircrew-initiated ejections throughout the performance envelope
1362 of the *aircraft*. In low altitude and adverse attitude conditions, the automated escape system
1363 shall be capable of escape at the conditions shown in Table 3-15, which applies to the full
1364 combined CG envelope of the seat and occupant combination; to include a ± 2 -inch tolerance
1365 about each individual CG for the specified aircrew population, as specified in Table 3-7.

1366

Table 3-15, Escape Envelope

Altitude (Feet)	Velocity (Knots)	Attitude	
		Fore and Aft	Roll Angle
20 ¹	120	Level	60 ⁰
200	150	Level	180 ⁰
300 ²	150	Level	0 ⁰
500	200	60 ⁰ Nose down	0 ⁰
580	450	30 ⁰ Nose down	0 ⁰
550	200	60 ⁰ Nose down	60 ⁰
600	250	45 ⁰ Nose down	180 ⁰

In all cases the cited conditions are at the initiation of the catapult. Recovery is defined as the aircrew being under an inflated parachute and having decelerated to a total velocity of 30 ft/sec or less for a 50% weight aircrew including maximum weight configuration of flight gear and survival kit. Divergence for all roll angles should be in the adverse direction.

1. Aircraft impact with the ground occurs at instant of seat-aircraft separation.
2. 10,000 foot per minute sink rate.

1367 3.5.20.7.2 Canopy and Escape Path Clearance

1368 The *aircraft* canopy and *escape path clearance system* shall ensure a clear escape path for the
 1369 aircrew member and ejection seat combination. The escape system shall provide a safe escape
 1370 path up to and including a maximum *aircraft* yaw at typical approach speed. The *escape path*
 1371 *clearance system* shall consist of a primary automatic mode (which either jettisons the canopy or
 1372 fractures the transparency) and a direct penetration through the transparency backup mode (using
 1373 transparency breakers). NOTE: A direct penetration through the transparency backup mode is
 1374 not required for systems where ejection through the canopy is not permitted because of canopy
 1375 construction. The *failure* of any canopy, canopy fracturing system/jettison, or interseat
 1376 sequencing mode shall not affect the performance of the remaining canopy, transparency
 1377 fracturing/canopy jettison system, or ejection seat mode(s). On those *aircraft* where ejection
 1378 through the canopy is not permitted because of canopy construction, means shall be provided to
 1379 prevent firing of the rocket catapult until the canopy has been jettisoned. Upon actuation of any
 1380 ejection seat firing control, the automatic mode(s) shall be activated in accordance with Inter-
 1381 Seat Sequencing (ISS) mode selection (see section 3.5.20.7.5.1).

1382 3.5.20.7.2.1 Ejection through the Canopy (For Transparency Fracturing Systems in 1383 Primary Mode, and Direct Penetration Backup Modes)

1384 The ejection seat and *aircraft* ballistic escape system shall provide a safe escape path. For a
 1385 primary automatic transparency fracturing system, the aircrew member shall not be used to clear
 1386 the escape path by breaking away any glass that is not severed from the canopy. Primary contact

UNCLASSIFIED

1387 between the transparency and the aircrew member, for all combinations of aircrew member size
1388 and seat adjustment shall not occur. In the direct penetration backup mode, the aircrew
1389 member's shoulders and knees may be used to assist in clearing the escape path. The primary
1390 automatic (transparency fracturing) system and the direct penetration backup system shall
1391 minimize injury potential due to transparency fragments. Any seat and canopy impact shall not
1392 prevent the seat from performing correctly. The Dynamic Response Index (DRI) calculated with
1393 the seat mounted instrumentation shall not exceed 16 for a primary automatic (transparency
1394 fracturing) system and 22.5 for a direct penetration back-up system. DRI shall be calculated
1395 using the method in section B.1.

1396 **3.5.20.7.3 Aircraft Clearance**

1397 The aircrew members and ejected portions of the escape system shall clear external *aircraft*
1398 structure throughout the *aircraft's* performance envelope. The aircrew member and ejection seat
1399 combination shall clear the tail by a minimum of 3 feet.

1400 **3.5.20.7.4 Initiation**

1401 The escape sequence shall be initiated by one complete extension of the ejection control.
1402 Interference between the flight controls and the ejection handle shall not be permitted. The
1403 motion of the ejection control shall be irreversible. The pull force to operate the ejection
1404 handle(s) shall be 40 ± 10 lbs. The pull force to operate a center-pull ejection handle shall be 40
1405 ± 10 lbs., within a 60° cone with the apex located at the ejection handle housing. Total time from
1406 initiation to seat first motion shall not exceed 300 milliseconds.

1407 **3.5.20.7.5 Inter-Seat Sequencing**

1408 An ejection sequencing system shall be provided. The sequencing system shall result in the
1409 fracturing or removal (jettison) of the canopy(s) and the ejection of the seat and aircrew
1410 combinations in a manner to minimize total escape time and collision potential. Either seat and
1411 aircrew combination shall not collide with the other seat and aircrew combination throughout the
1412 entire escape envelope. Flame impingement to either aircrew member in or out of the cockpit
1413 shall meet the thermal energy exposure limits of section 3.5.20.3.3.

1414 **3.5.20.7.5.1 Inter-Seat Sequencing Mode Selection (for tandem cockpit configured aircraft)**

1415 The *aircraft* shall contain a mode select control located in the aft cockpit that has the following
1416 sequencing options:

- 1417 a. Both = Actuation of either the forward or aft seat ejection handle shall immediately start
1418 the ejection sequence of the aft seat followed by the forward seat.
- 1419 b. Solo = Actuation of the forward seat ejection handle shall eject only that seat and
1420 eliminate any sequencing delay for aft seat and front seat separation. This shall not
1421 prevent aft seat ejection should the mode selector be in the solo position.
- 1422 c. CMD FWD = Actuation of the forward seat ejection handle shall immediately start the
1423 ejection sequence of the aft seat followed by the forward seat. Actuation of the aft seat
1424 ejection handle shall eject only the aft seat and eliminate any sequencing delay for aft
1425 seat and front seat separation.

1426 3.5.20.7.5.2 Divergence

1427 Seat divergence shall be incorporated to prevent collisions between the front and rear seat and
1428 man combinations.

1429 3.5.20.7.6 Seat Aircrew Separation

1430 A positive automatic means shall be provided to affect seat and aircrew separation and prevent
1431 seat and aircrew parachute interference.

1432 3.5.20.7.7 Descent Recovery Parachute System

1433 The ejection seat shall incorporate the recovery parachute system. The recovery parachute
1434 system shall be equivalent to a qualified military escape recovery system. The recovery
1435 parachute shall connect to the torso harnesses listed in Table 3-16. The risers shall incorporate
1436 cross connector straps. A positive, fully automatic means of extraction shall be used to deploy
1437 the recovery chute after ejection. For the automatic deployment mode, an altitude sensing device
1438 shall prevent deployment above 15000 ± 1000 feet *PA*. A manually initiated parachute
1439 deployment system shall be provided as a backup to the automatic system and allow override of
1440 the automatic system.

1441 3.5.20.7.7.1 Recovery Parachute Deployment/Inflation Phase Accelerations

1442 The vector sum of the parachute deployment loads (including line stretch and opening shock)
1443 shall not exceed 15 G if the direction of force applied to the body is random and unpredictable as
1444 in a typical manual bailout or aircrew mounted parachute system and 25 G if the system is
1445 controlled so the force is applied while the body is in an optimum position (inertial resultant in
1446 +z to -x direction or “eyeballs out” to “eyeballs down.”).

1447 3.5.20.7.7.2 Descent Rate – Steady State Phase

1448 The steady state vertical descent rate shall not exceed 23 feet per second average vertical
1449 velocity and shall not have average oscillations in excess of $\pm 15^\circ$ from vertical at standard sea
1450 level with a suspended weight of 337 lbs. The parachute shall be provided with a maneuvering
1451 capability that can be selected by the aircrew member during parachute descent. Performance in
1452 the selected maneuverable mode shall have an average turn rate of $21^\circ \pm 5^\circ/\text{sec}$ and an average
1453 horizontal (forward) velocity not to exceed 20 feet per second, based on a zero wind condition.
1454 Horizontal velocity in the “hands off” non-maneuverable mode shall not exceed 15 feet per
1455 second based on a zero wind condition.

1456 3.5.20.8 Personnel Restraint System

1457 The ejection seat shall incorporate a personnel restraint system to interface with the torso
1458 harnesses listed in Table 3-16 and shall provide full torso restraint, while allowing operation of
1459 required controls during all conditions of flight. The restraint attachments shall provide positive
1460 aircrew member retention without injury under all conditions of emergency ejection and crash
1461 impacts.

1462 **3.5.20.8.1 Limb Restraint System**

1463 The seat shall incorporate limb restraints (both arm and leg) to restrain the limbs and prevent flail
1464 injuries during the ejection sequence (windblast, free-flight and drogue phases). Leg restraints
1465 shall prevent movement of the legs laterally, beyond the sides of the seat. Arm restraints shall
1466 prevent movement of arms rearward, beyond the seat back tangent line. Limb restraints shall not
1467 interfere with aircrew movements required for *aircraft* control and mission accomplishment
1468 during all phases of flight. The limb restraint system shall not require any new special aircrew
1469 personal flight equipment (new/modified flyers coveralls, jacket, or any other item not listed in
1470 Table 3-16). Limb restraints shall not hinder aircrew ground egress procedures and timing, and
1471 shall be compatible with the items listed in Table 3-16.

1472 **3.5.20.8.2 Inertia Reel Lock**

1473 The seat restraint system shall incorporate an inertial reel in the seat with a manual (with positive
1474 lock/unlock provisions) and powered inertia reel lock mechanism. The inertia reel lock shall
1475 have standard rate sensitive locking capabilities. The manual inertia reel lock control shall be
1476 located on the left side of the seat within easy access of the seat occupant with the restraints
1477 locked. Pre-ejection body positioning and upper torso restraint shall be completed in a minimum
1478 of 0.15 second and a maximum of 0.3 second after ejection initiation in a 1 G_z environment. The
1479 inertia reel lock shall not engage during normal cockpit movement.

1480 **3.5.20.9 Energetic Materials and Components**

1481 Energetic materials (e.g., cartridges, Cartridge Actuated Devices (CAD), Propellant Actuated
1482 Devices (PAD), electrical initiators, Ballistic Signal Transmission Systems (BSTS), and other
1483 energetic *components* used in the *aircraft* escape system) shall meet the release to service
1484 requirements for safety of flight by military personnel as specified in MIL-C-83125 (cartridges),
1485 MIL-C-83124 (CAD), MIL-P-83126 (PAD), MIL-DTL-23659 (electrical initiators), and MIL-D-
1486 81980 (BSTS).

1487 **3.5.20.9.1 Firing Mechanism**

- 1488 a. Mechanical. The force required to mechanically actuate the mechanisms shall be 15 lbs.
1489 minimum and 25 lbs. maximum unless the mechanism is used in a CAD/PAD that is
1490 already qualified and in the United States Government inventory. Pre-cocked firing
1491 mechanisms shall not be used.
- 1492 b. Gas-actuated. Gas-actuated firing mechanisms shall have a no-fire and all-fire capability
1493 as follows. The firing mechanism shall not actuate upon application of 400, +0, -25 psig
1494 gas pressure on the firing pin. The firing pin retention mechanism (e.g., shear pin(s))
1495 shall release within 0.030 second upon application of 600, +25, -0 psig applied at a rate
1496 between 10,000 and 50,000 psig/sec inclusive acting on the firing pin.
- 1497 c. Gas-actuated. Gas-actuated firing mechanisms that are internal to the catapult/ejection
1498 gun and are operated by internal catapult/ejection gun pressure shall have a no-fire and
1499 all-fire capability as follows: The firing mechanisms shall not actuate upon application
1500 of 225, +0, -25 psig gas pressure on the firing pin. The firing pin retention mechanism
1501 (e.g., shear pin(s)) shall release within 0.030 seconds upon application of 350, +25, -0

- 1502 psig applied at a rate between 10,000 and 50,000 psig/sec inclusive acting on the firing
1503 pin.
1504 d. Electrical. Electrical firing mechanisms shall be designed IAW MIL-DTL-23659
1505 Electrical Initiators.

1506 **3.5.20.10 Acceleration Limits**

1507 **3.5.20.10.1 Acceleration Limits – Catapult Phase**

1508 The acceleration imposed on the seat occupant in the +G_z direction (parallel to the spinal
1509 column) by the ejection catapult shall not exceed a DRI of 16 in system level ejection sled or
1510 inflight tests at ambient temperatures where the acceleration vector is within 5° of the z axis. For
1511 controlled *component* testing, the acceleration imposed on the seat occupant in the +G_z direction
1512 (parallel to the spinal column) by the ejection catapult shall not exceed a DRI of 16 at 70° F and
1513 20 at 165° F, with an allowable standard deviation of 1.0. If the acceleration vector is not within
1514 5° of the z axis, or the head rest is greater than one inch in front of the seat back tangent line, the
1515 DRI limits at all pre-ignition temperatures are reduced by 2, in order to compensate for the
1516 differences. DRI shall be calculated using the method in section B.1.

1517 **3.5.20.10.2 Acceleration Limits – Free Flight and Drogue Phase**

1518 The acceleration limits after *aircraft* separation (free flight and drogue phase) shall not exceed a
1519 MDRC of 1.0 up to 450 KEAS and may increase linearly, over 450 KEAS, not to exceed 1.7 at
1520 600 KEAS. MDRC shall be calculated using the method in section B.2.

1521 **3.5.20.11 Head Injury – All Phases**

1522 Head injury, as indicated by the probability of a concussion ($P_{\text{concussion}}$), shall not exceed 5%
1523 during all escape system phases. Head injury shall be calculated using the method in section
1524 B.3.

1525 **3.5.20.12 Neck Loads - All Phases**

1526 **3.5.20.12.1 Neck Loads – Speeds up to and including 450 KEAS**

1527 For speeds up to and including 450 KEAS, the upper neck forces and moments shall be limited
1528 to meet a Multi-Axial Neck Injury Criteria (MANIC) not to exceed 0.47 and a Neck Moment
1529 Index about the x-axis (NMI_x) not to exceed 0.56 at the occipital condyles (C0-C1). MANIC
1530 and NMI_x shall be calculated using their respective methods in section B.4.

1531 **3.5.20.12.2 Neck Loads – Speeds greater than 450 KEAS**

1532 For speeds greater than 450 KEAS, the MANIC and NMI_x limit may increase linearly as a
1533 function of speed, but shall not exceed a MANIC of 0.65 and NMI_x of 0.86 at the occipital
1534 condyles (C0-C1) at 600 KEAS. MANIC and NMI_x shall be calculated using their respective
1535 methods in section B.4.

1536 **3.5.20.13 Environmental Conditions**

1537 The escape system shall be capable of satisfactory operation during and following exposure to
1538 the extremes of the environmental conditions specified in section 3.9.

1539 **3.5.20.14 Center of Gravity (CG) Envelope**

1540 The center of gravity (CG) envelope for the ejection seat shall include the seat and aircrew
1541 member CG extremes for the specified aircrew members (per section 3.5.5) and a nude aircrew
1542 member weight range of 103 to 245 lbs., with full personal flight gear (per section 3.5.21) and
1543 for the range of ejection seat adjustments. The rocket center line of thrust shall be located using
1544 the dynamic CG to ensure resultant forces associated with the escape process result in a stable
1545 aircrew member and seat mass.

1546 **3.5.20.15 Stabilization and Deceleration**

1547 Provisions shall be incorporated for seat and aircrew member stability during free flight and
1548 drogue phase (*seat/aircraft* separation to *seat/aircrew* separation). Seat stability shall be
1549 maintained to align the neutral axis direction of the aerodynamic deceleration parallel to the
1550 eyeballs-out (eyeballs-in for backward facing seats) direction and limit excursions and damped
1551 oscillations about the neutral axis to $\pm 25^\circ$ in the pitch plane at all ejection speeds and $\pm 25^\circ$ in the
1552 yaw plane at speeds above 250 KEAS. The stabilization and deceleration system shall do the
1553 following:

- 1554 a. Counteract rotation caused by 1) offset between dynamic CG and the rocket thrust line
1555 and 2) aerodynamic forces.
- 1556 b. Control the application of deceleration forces. The seat shall be stabilized in such a
1557 manner that the neutral axis of deceleration is $+G_x$ and the acceleration limits of section
1558 3.5.20.10 are not exceeded.
- 1559 c. Maintain an optimum attitude for recovery parachute deployment such that deployed
1560 elements are assured clearance from rocket exhaust fumes and entanglement of risers and
1561 parachute suspension lines is prevented.
- 1562 d. Stabilize the aircrew member or seat and aircrew member combination during free fall to
1563 the altitude aneroid setting for recovery parachute opening following a high altitude
1564 ejection.

1565 **3.5.20.16 Seat Assembly**

1566 The seat assembly shall 1) provide adequate support and retention of the aircrew body and limbs
1567 during emergency operation; 2) be fully suited to operational use; 3) accommodate variations in
1568 anthropometric dimensions of aircrew members per the range cited in section 3.5.5; and 4) for
1569 *aircraft* providing a direct penetration through-the-canopy backup system, allow a minimum of
1570 0.5 inch clearance between the canopy and the closest projection of the canopy breakers with the
1571 seat fully raised.

1572 **3.5.20.16.1 Headrest**

1573 A headrest shall be provided to accommodate the helmeted head of the aircrew. The headrest
1574 shall provide support for the full range of aircrew member anthropometric sizes as specified
1575 herein.

1576 **3.5.20.16.2 Canopy Breakers**

1577 For *aircraft* providing a direct penetration through-the-canopy backup system, the seat assembly
1578 shall incorporate canopy breakers to fracture the transparency in the direct penetration through
1579 the canopy backup mode. Canopy breakers shall make the initial impact with the transparency.

1580 **3.5.20.16.3 Cushions**

1581 The seat surface (including the aircrew buttocks and back support regions of the seat) shall
1582 incorporate cushions.

1583 **3.5.20.17 Proof Loads**

1584 The seat system shall withstand the following proof loads without permanent deformation:

- 1585 a. Front edge of seat bucket - 270 lbs. downward, distributed 1.5 inches each side of
1586 centerline.
- 1587 b. Ejection controls - 200 lbs. tension, center of gripping surface.
- 1588 c. Headrest - 330 lbs. aft, distributed over 2 inch square area at center of headrest.
- 1589 d. Seat back - 1000 lbs. aft, perpendicular to surface, uniformly distributed below the
1590 headrest.

1591 **3.5.20.18 Crash Ultimate Loads**

1592 The ejection seat system including the restraint system, the ejection seat assembly, the ejection
1593 seat attachment fittings, and the ejection seat supporting structure shall meet the dynamic G load
1594 capability of 40 Gs for up to $\pm 20^\circ$ off axis in the forward direction.

1595 **3.5.20.19 Redundancy**

1596 All system *components*, whose proper functioning is critical to the successful operation of the
1597 escape system or to the safety of the aircrew members, shall be provided with redundant
1598 actuation means. The escape system interseat signal transmission system (part of the interseat
1599 sequencing system) shall be redundant.

1600 **3.5.20.20 Safety**

1601 The escape system shall include protection of all *components* against damage that would cause
1602 system *failure* or release of energy sources that could constitute or contribute to a hazardous
1603 situation. The escape system and its subsystems shall be protected against inadvertent actuation
1604 including those actuations that could be introduced by foreign object damage (FOD). Links
1605 between ejection controls and initiator devices shall not actuate the system with the controls
1606 safety locked and with force applied at the linkage. The escape system shall provide a method to

1607 indicate that the system is inoperable when any *component* that can be fired or activated, without
1608 an apparent indication, has caused the escape system to become inoperable.

1609 **3.5.20.21 Explosive Device Maintainability**

1610 Propellant and explosive systems shall not require any type of maintenance during their useful
1611 lives.

1612 **3.5.20.22 Performance Reliability**

1613 Propellant and explosive systems reliability requirements shall be not less than 99.9% at a LCL
1614 of 90% over the appropriate temperature range in section 3.9.

1615 **3.5.20.23 Component Life and Change-outs**

1616 Escape system *components* with a limited life requiring change-outs, refurbishing, or periodic
1617 testing shall, to the maximum extent possible, have replacement and/or testing cycles compatible
1618 with the *aircraft* overhaul or inspect schedule.

1619 **3.5.20.24 Cartridge Actuated Devices/Propellant Actuated Devices**

1620 The installed life for a minimum of 90% of CAD/PADs *components* shall be a minimum of 6
1621 years or greater as assigned by the Joint CAD/PAD program office and shall, to the maximum
1622 extent possible, have replacement cycles compatible with the *aircraft* overhaul or inspect
1623 schedule.

1624 **3.5.20.25 Aircraft Integration**

1625 The escape system shall be independent from other *aircraft components* and systems except for
1626 hardware attachment, seat adjustment, and *warning* displays.

1627 **3.5.20.26 Escape System Installation and Removal**

1628 With canopy installed, the ejection seat shall be capable of being installed in 15 minutes and
1629 removed in 15 minutes, or less.

1630 **3.5.20.27 Specialized Tooling or Machinery**

1631 Ejection seat parachutes shall be manually packable (by hand) as a minimum. Any specialized
1632 tooling or machinery required to pack the parachutes shall be capable of being locally
1633 manufactured in the field by using drawings incorporated into the seat maintenance Technical
1634 Order.

1635 **3.5.21 Aircrew Flight Equipment and Pilot Personal Protection**

1636 **3.5.21.1 Personal Flight Equipment Compatibility**

1637 The *aircraft* shall be compatible with the USAF personal flight equipment per Table 3-16.

1638


Table 3-16, Personal Flight Equipment

Item Name	Nomenclature
Anti-G Trouser	CSU-22/P or CSU-23/P
Oxygen Mask	MBU-20/P
Oxygen Connector	CRU-60/P
Torso Harnesses	PCU-15A/P and PCU-16A/P with oxygen connector mounting bracket and Koch Modified Gen II Canopy Release
Life Preserver	LPU-38/P
Crew Helmet	HGU-55/P (High Speed)
Night Vision Goggles	AN/AVS 9
Crew Coveralls	CWU-27/P
Crew Gloves	GS/FRP-2
Crew Winter Jacket	CWU-45/P
Crew Summer Jacket	CWU-36/P
Crew Boots	USAF Authorized Safe-to-Fly (Bellville, Daner, Wellco, and McRae Models)
Universal Water Activated Release (UWARS)	PCU-63

1639 **3.5.21.2 Anti-G Trouser Pressurized Air Supply**

1640 The ECS or bleed air system shall provide pressurized air supply to anti-G trousers at each
1641 aircrew position and at pressure levels as defined in Figure 3-1.

1642 **Figure 3-1, Anti-G Trouser Pressurized Air Supply**

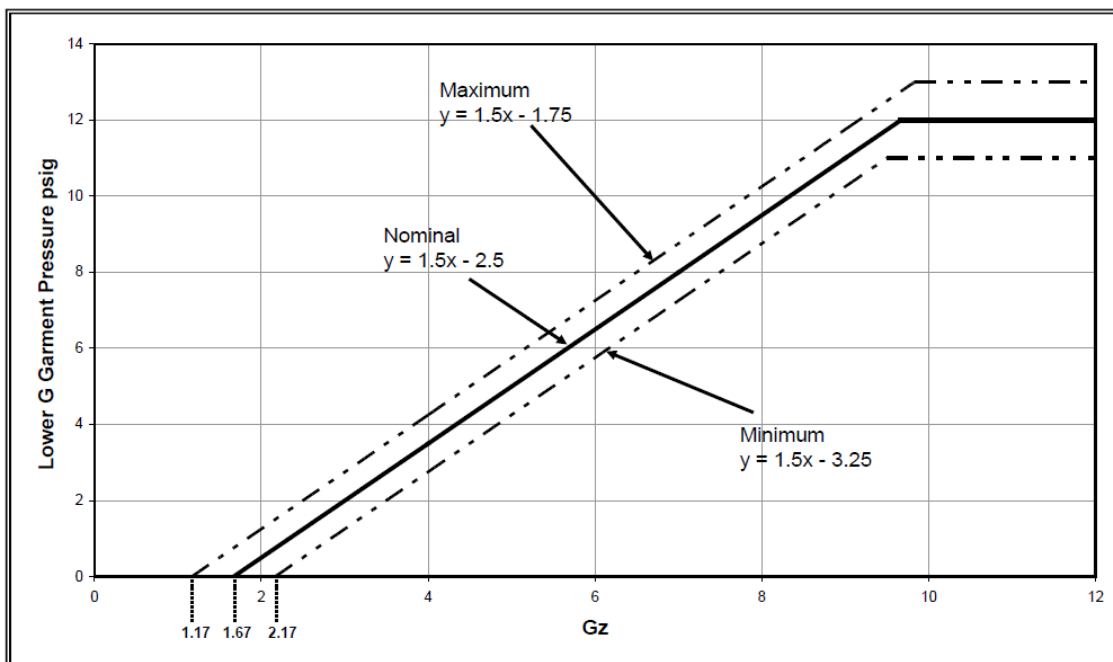

1643 **3.5.21.3 Survival Kit Provisions**

1644 Each ejection seat shall have one soft sided survival kit. Each survival kit shall have a sufficient
 1645 volume and shape that accommodates the storage of the mandatory items listed in Table 3-17.
 1646 Each survival kit shall include the mandatory items listed in Table 3-17. The survival kit shall
 1647 have automatic and manual aircrew selectable modes of deployment.

1648 **Table 3-17, Survival Kit**

Item Name	NSN
Compass, Lensatic	6605-01-196-6971
Signal, Smoke and Illumination, MK-124, Mod 0	1370-01-030-8330
Signal Mirror	6350-00-261-9772
First Aid Kit (with Kit Contents) Med Module	6545-01-534-0925
CAT Tourniquet	6515-01-521-7976
Radio, PRC90-2 with Battery	5820-01-238-6603
AN/URT 33/D Beacon with Battery (or Government-approved replacement)	5826-01-419-2926 (or TBD for approved replacement)
Two (2) Flex Pack Waters	8960-01-124-4543
Radio Battery, Lithium, p/n BA-5638/U (Spare)	6135-01-455-7947
Flashlight Mini Maglight	6230-01-259-4495
Whistle, Police Plastic	8465-00-254-8803
Raft Repair Plug	4220-00-763-3766
Life Raft, LRU-23/P	4220-99-297-6688

1649 **3.5.21.4 Personnel Emergency Location Transmitter**

1650 The personnel emergency location transmitter contained in the survival kit shall be capable of
 1651 automatically activating during the ejection sequence.

1652 **3.5.21.5 Aircrew Acoustic Exposure Tolerance**

1653 The *aircraft* shall not expose the aircrew, wearing protective equipment, in the cockpit to noise
 1654 levels at their ears that exceed a Total Daily Noise Exposure (TDE) of one (1.0). TDE shall be
 1655 calculated IAW MIL-STD-1474, Section D.4.4.3.2, Equation 1a, using the worst-case nominal
 1656 mission exposure dose (aircrew) and $n=3$, for the total number of noise exposure segments in the
 1657 worst nominal duty day. To determine the worst-case nominal mission exposure (aircrew),
 1658 individual mission exposure doses shall first be calculated IAW MIL-STD-1474, paragraph
 1659 D.4.4.3.3, Equation 2, for each mission type. The mission type with the highest individual
 1660 mission exposure shall be used as the worst-case nominal mission exposure dose (aircrew).

1661 **3.5.22 Oxygen System**

1662 The *aircraft* shall have an oxygen system that meets the minimum physiological requirements of
 1663 the aircrew at their stations for the intended/expected normal and emergency missions of the
 1664 *aircraft*. The oxygen system shall operate and be compatible with the operational environment
 1665 of the *aircraft* while also being appropriate for the mission requirements of the *aircraft*. Oxygen
 1666 equipment shall be compatible with military pressure-demand masks, helmets, and other items of
 1667 personal equipment listed in Table 3-16, along with the restraint and escape systems (section


1668 3.5.20). System *components* shall also meet environmental storage requirements (section 3.9).
1669 The aircrew breathing system shall provide altitude protection and contamination protection.
1670 The oxygen system shall contain no unacceptable hazards and no undesirable hazards in
1671 accordance with MIL-STD-882.

1672 **3.5.22.1 Oxygen Supply Quality**

1673 The *aircraft* shall have an oxygen system that continuously supplies the aircrew with oxygen
1674 breathing gas with adequate oxygen content, flow, and quality during all phases of *aircraft*
1675 operations both on the ground and inflight. The oxygen concentrations and Pressure Breathing
1676 for Altitude (PBA) schedule shall conform to Figure 3-2. For On-Board Oxygen Generating
1677 System (OBOGS), an oxygen concentration monitor shall monitor the OBOGS outlet gas. An
1678 oxygen concentration *warning* shall be set at or above the minimum oxygen concentration curve.
1679 The *warning* shall alert the aircrew if the oxygen concentration drops to or below the minimum
1680 level. The oxygen concentration delivered by the breathing system using OBOGS shall be above
1681 the oxygen *warning* threshold at steady-state breathing gas flows from 1) 7 to 60
1682 liters/minute/aircrew member Ambient Temperature and Pressure Dry (ATPD) from Sea Level
1683 to a cabin altitude of 7,999 feet; and 2) 7 to 80 liters/minute/aircrew member (ATPD) from a
1684 cabin altitude of 8,000 feet to the *aircraft absolute ceiling*. The system shall be capable of
1685 achieving the peak inspiratory and expiratory flows in Table 3-18 as applicable, based on cabin
1686 altitudes. The breathing gas to the aircrew mask during normal ground and flight operations
1687 shall be within +10 ° F and -20 ° F of the ambient *aircraft* cabin temperature. During normal
1688 operations the breathing gas shall have no discernible or *objectionable* odor.

1689
 1690

**Figure 3-2, Oxygen Concentrations and Regulator Pressure Schedule
 (For aircraft with a 5 psi differential cabin press)**

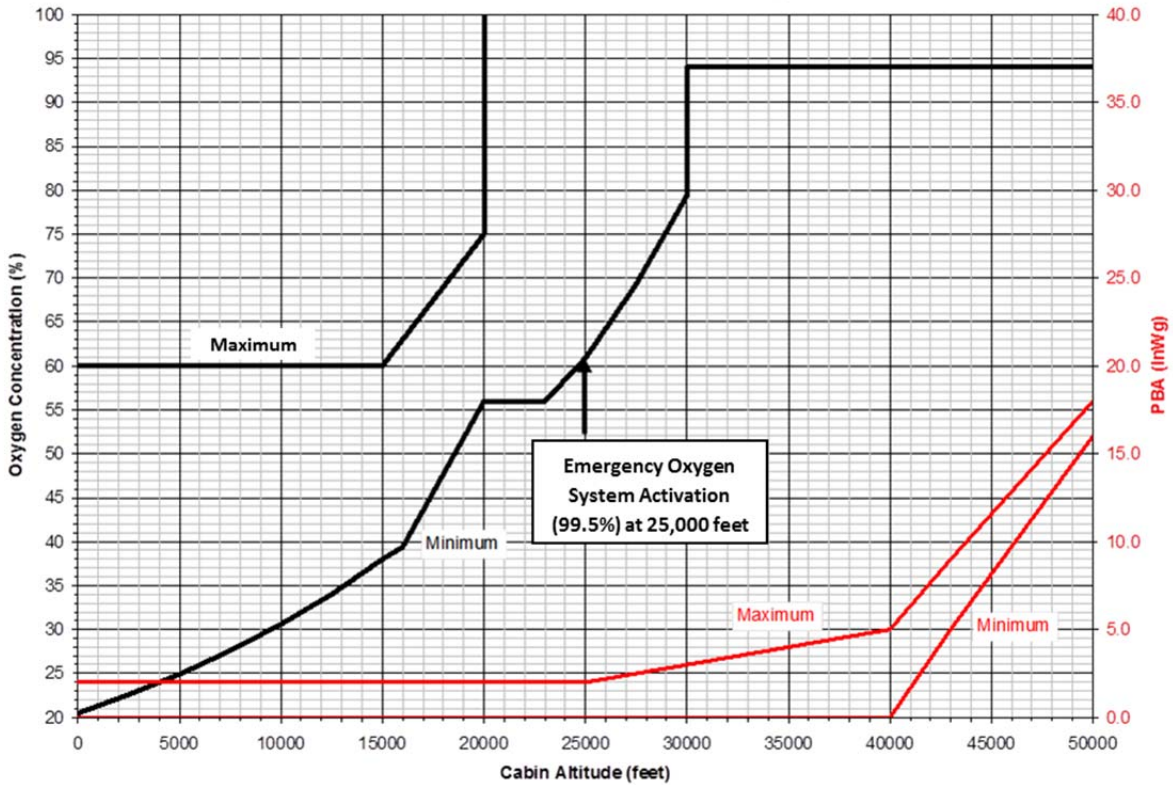

1691

Table 3-18, Peak Inspiratory and Expiratory Flows and Mask Cavity Pressures

Peak Inspiratory and Expiratory Flows (liter ATPD/min)	Mask Cavity Pressure (in Wg)		
	Minimum	Limits to Maximum	Maximum Swing
	Without Safety Pressure		
30*	-1.5	+1.5	2.0
90*	-2.2	+2.6	3.4
150*	-4.5	+4.0	7.0
200*	-7.6	+6.0	12.0
	With Safety Pressure		
30*	+0.1	+3.0	2.0
90*	-0.8	+3.8	3.4
150*	-3.5	+5.0	7.0
200*	-7.0	+6.6	12.0

* Cabin altitude from Sea Level to 38,000 feet.

1692 **3.5.22.1.1 Oxygen Mask Pressures**

1693 The minimum and maximum pressures and the total change of pressure in the oxygen mask
1694 during the respiratory cycle shall not exceed the limits in Table 3-18. The pressure in the mask
1695 cavity during and immediately after a rapid decompression (1 second) shall not exceed the
1696 ambient cabin pressure plus 41 mm Hg (22 inches of Water gauge) for longer than 100
1697 milliseconds. The mask pressure shall never exceed 70mm Hg (37.5 inches of Water gauge)
1698 above the ambient pressure.

1699 **3.5.22.2 Oxygen Quantity**

1700 The *aircraft* oxygen supply shall be sufficient for two aircrew members to perform any
1701 combination of six missions plus one divert (mission profiles are defined in APPENDIX A) at all
1702 altitudes from 1000 feet *PA* up through *aircraft absolute ceiling* at all power settings without re-
1703 servicing between missions or flights. If a Liquid Oxygen (LOX) or Gaseous Oxygen (GOX)
1704 system is used, LOX quantity or GOX pressure shall be displayed to the aircrew as applicable.
1705 For LOX or GOX, low level aural and visual *warnings* shall be provided when the total quantity
1706 of oxygen remaining reaches 10%.

1707 **3.5.22.3 Uninterrupted Oxygen Supply**

1708 The *aircraft* shall continue to supply oxygen breathing gas throughout any periods of ECS
1709 anomalies, engine bleed air anomalies and low pressure transients, and without requiring aircrew
1710 actions for activation and deactivation. If an OBOGS is implemented, the *aircraft* shall provide
1711 the stabilized air flow and pressures required by the OBOGS during engine bleed air and ECS
1712 pressure transients, pressure fluctuations, rapid pressure drop-offs, and pressure spikes. The
1713 oxygen system shall provide sufficient volume to meet the aircrew's dynamic breathing
1714 requirements. The system shall ensure an adequate volume of breathing gas is available at high
1715 breathing demands (noted in Table 3-18). Oxygen shall be provided to the aircrew when the
1716 OBOGS cannot supply breathing oxygen. Alternate or backup oxygen subsystem(s) required to
1717 complement the primary *aircraft* oxygen system shall have duration and physiological
1718 performance requirements consistent with the safe recovery of the *aircraft* from the maximum
1719 operational altitude to an altitude that does not require oxygen use. The backup oxygen shall be
1720 at least 90% oxygen.

1721 **3.5.22.3.1 OBOGS Pressure Sensors**

1722 The OBOGS shall have a pressure sensor to continuously monitor the real time air inlet pressure.
1723 The inlet pressure sensor shall not cause nuisance *warnings* for short transients that will not
1724 affect OBOGS operation. The OBOGS shall have a pressure sensor to continuously monitor the
1725 OBOGS real time outlet pressure. The outlet pressure sensor shall not cause nuisance *warnings*
1726 for short transients that will not affect OBOGS operation. All pressure data shall be recorded
1727 and stored within the OBOGS or on-board the *aircraft* and be capable of convenient download
1728 by ground maintenance personnel.

1729 **3.5.22.4 Emergency Oxygen**

1730 The *aircraft* shall have an Emergency Oxygen Source (EOS) in case of an emergency for aircrew
1731 ejection and primary oxygen system contamination or *failure*. The emergency oxygen source

1732 shall be independent of and isolated from the primary and backup *aircraft* oxygen supply. The
1733 emergency oxygen source shall provide a minimum of 5 minutes supply of physiologically
1734 compatible oxygen and allow for a constant rate of descent, from the *absolute ceiling* of the
1735 *aircraft* to 10,000 feet *PA* during an emergency descent or until seat and crew member separation
1736 during ejection, whichever is longer. A manual control, which can be actuated by each aircrew
1737 member in each cockpit as well as automatic activation upon ejection, shall be provided. The
1738 manual control shall be on the left side of the ejection seat. The *aircraft* shall alert or provide
1739 feedback to the aircrew when emergency oxygen is being provided.

1740 **3.5.22.5 Breathing Regulator**

1741 The *aircraft* shall have a breathing regulator with performance characteristics equivalent to or
1742 better than the parameters in Table 3-18 for each aircrew member. The regulator shall operate
1743 properly with the input pressure, concentration level, and oxygen type provided. The regulator
1744 shall provide a manually selectable capability to supply increased pressure for decompressions
1745 and a test mask function for checking the mask-to-face seal. The regulator shall provide a
1746 manually selectable capability to supply maximum oxygen concentration.

1747 **3.5.22.6 Oxygen System Controls and Displays**


1748 The *aircraft* shall have sufficient oxygen system controls and displays to enable the aircrew to
1749 effectively operate and monitor the system. ON, OFF, and Pressure Breathing for G (PBG)
1750 controls and an oxygen flow display to verify oxygen flow to the mask shall be provided. For an
1751 OBOGS, a product gas quality *failure* status display shall also be provided. Maximum and
1752 normal mixtures shall be provided through a single selector in each cockpit. All regulator
1753 control functions shall be grouped together for each aircrew. Cabin *PA* shall be displayed to
1754 both aircrew members at all times. All displays shall be located at or forward of the seated
1755 aircrew member position.

1756 **3.5.22.7 Oxygen System Integration**

1757 The *aircraft* oxygen system shall be installed such that the operational envelope of the
1758 *components* does not violate the operational envelopes of any other *aircraft* subsystem, and the
1759 cabling, wiring, and plumbing routing between *aircraft* subsystems. The oxygen system
1760 *components* and plumbing shall be installed to minimize fire hazards. The OBOGS air inlet shall
1761 be protected from entrained liquid water. The design shall consider cold weather operations and
1762 the possibility of freezing. All oxygen controls and displays, hoses, masks, and equipment
1763 mounted on the personnel shall be installed such that an effective interface that maximizes
1764 mission effectiveness has been provided between personnel using the equipment and the oxygen
1765 equipment itself. Where the oxygen system must be integrated with other *aircraft components* or
1766 subsystems, the operation and design of the oxygen system shall not be degraded. The oxygen
1767 system design shall consider requirements for structural integrity, accessibility, maintainability,
1768 serviceability, logistics support, training, quality assurance, survivability, safety, supportability,
1769 reliability, human engineering, international standardization, hazards analysis, contamination
1770 investigation, and cleaning concerns.

1771 **3.5.22.8 Pressure Breathing for G (PBG) Loading**

1772 The *aircraft* shall provide PBG loading mask pressures as shown in Figure 3-3. The system shall
 1773 have a fail-safe design to prevent PBG without G-trouser inflation, a failure mode that could
 1774 cause a physiological incident. (NOTE: Inflatable torso garments are not required.)

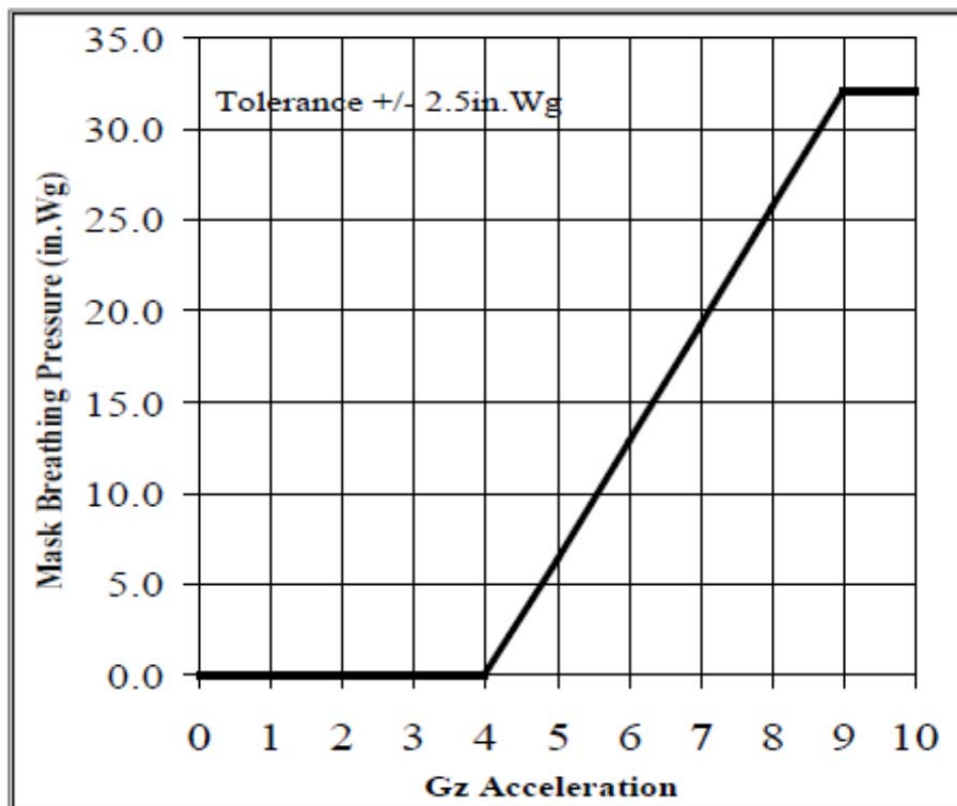1775 **Figure 3-3, Mask Breathing Pressure Schedule vs G Loading**1776 **3.5.22.9 Breathing Gas Contamination Limits**

1777 The *aircraft* oxygen system shall not contain toxic or corrosive materials (e.g., lead or cadmium).
 1778 The gaseous contaminants in the aircrew breathing gas shall not exceed the limits noted in Table
 1779 3-19. The OBOGS breathing gas shall be filtered and prevent particles larger than 0.4 microns
 1780 from entering the aircrew's breathing gas. The OBOGS exhaust gas shall be effectively vented.
 1781 The OBOGS waste gas shall not be allowed to enter the *aircraft* cabin. OBOGS waste gas shall
 1782 be prevented from back flowing into the ECS and bleed air system during low pressure condition
 1783 and loss of pressure condition. The breathing system and air source(s) design shall consider
 1784 conditions in which the *aircraft* engine(s) might ingest jet engine exhaust gas during ground
 1785 operations and fuel spillage during aerial refueling. Also, the breathing system and air source(s)
 1786 design shall consider failure modes where *aircraft* fluids (hydraulic fluid, coolant fluid, etc.)
 1787 might leak into the OBOGS source air.

1788

Table 3-19, Breathing Gas Maximum Allowable Contaminant Concentration

SUBSTANCE	MAXIMUM ALLOWABLE CONCENTRATION (ppmv)
Acrolein	0.05
Aldehydes	0.2
Aromatics	0.1
Carbon Dioxide	500
Carbon Monoxide	10
Ethanol	500
Fluorine (as HF)	0.05
Halogenated Solvents	0.2
Hydrogen Peroxide	0.5
Methyl Alcohol	100
Methyl Bromide	1
Nitrogen Oxides	0.1
Ozone	0.05
Total Remaining Hydrocarbons	25
Unsaturated Hydrocarbons (alkenes, alkynes)	0.2
Nickel	0.125 mg/m ³
Cobalt	0.025 mg/m ³
Oil and Particulate Matter	0.2 mg/m ³

1789 **3.5.22.10 OBOGS Monitoring**

1790 The OBOGS shall have *built-in test (BIT)* features to check the system's ability to safely operate.
 1791 The aircrew shall be immediately notified of any *safety critical faults*. The *BIT* information
 1792 indicating a *failure* parameter of the OBOGS shall be stored within the OBOGS or on-board the
 1793 *aircraft* for the last ten (10) hours of operation and be capable of convenient download by ground
 1794 maintenance personnel.

1795 **3.5.23 Ground Personnel/Maintainer Specific Considerations**1796 **3.5.23.1 Ground Personnel Acoustic Exposure Tolerance**

1797 The *aircraft system* shall not expose the ground personnel, wearing protective equipment in the
 1798 proximity of the *aircraft* to noise levels at their ears that exceed a Total Daily Noise Exposure
 1799 (TDE) of one (1.0). TDE shall be calculated IAW MIL-STD-1474, paragraph D.4.4.3.2,
 1800 Equation 1a, and shall take into account the maximum number of exposure doses the ground
 1801 personnel will experience in a 24-hour period (total number of noise exposure segments in the
 1802 worst nominal duty day). The TDE is calculated as a summation of the launch, recovery, and
 1803 maintenance task occurrences the ground personnel will experience in a 24-hour period. For the

UNCLASSIFIED

1804 purposes of this calculation, the maximum number of exposure doses the ground personnel will
 1805 experience shall be defined as a total of not less than: four launch, four recovery and eight hours
 1806 of maintenance tasks involving all noise producing ground support equipment (e.g., bleed air
 1807 carts, generators, etc., see section 3.8.14.3). The exposure time for the noise exposure segment i
 1808 (T_i) shall be defined as the maximum A-weighted noise pressure levels for the actual operation
 1809 duration or the minimum exposure times listed (whichever is greater). This calculation shall be
 1810 performed for all ground positions (e.g., ground-crew chief, and assistant crew chief) on the
 1811 flight-line for launch, recovery, and maintenance operations.

1812 3.5.23.2 Maintainer Lifting and Carrying Limits

1813 The *aircraft system* shall be in compliance with the maximum maintainer lifting and carrying
 1814 limits defined in paragraphs 5.8.6.3.1-5.8.6.3.12 of MIL-STD-1472. The *aircraft system* shall
 1815 comply with the maximum design weight limits for one person provided in Table 3-20. (Note:
 1816 The values in Table 3-20 assume that there are no obstacles between the person lifting and the
 1817 shelf, table, bench, or other surface on which the object is to be placed. Where a lower
 1818 protruding shelf or other obstacle limits the lifter's approach to the desired surface, the weight
 1819 limit of the object shall be reduced by 33%.)

1820 **Table 3-20, Maintainer Lifting and Carrying Limits**

Handling Function	Male and Female Population
Lift an object from the floor, and place it on a surface equal to or greater than 5.0 feet above the floor.	31 lb.
Lift an object from the floor, and place it on a surface not greater than 5.0 feet above the floor.	37 lb.
Lift an object from the floor, and place it on a surface not greater than 3.0 feet above the floor.	44 lb.
Carry an object 33 feet or less	42 lb.

1821 3.6 Embedded Training

1822 The *aircraft* shall have an *Embedded Training* capability that provides both aircrew with
 1823 switchology, *situational awareness* indicators, and display presentations via the *LAD* and *HTD*
 1824 as applicable so that aircrew can perform *Cockpit/Crew Resource Management* training. This
 1825 training consists of the *virtual simulation* of mission systems IAW subparagraphs below.

1826 3.6.1 Radar System Simulation

1827 3.6.1.1 Radar Functions and Modes

1828 The radar system simulation shall provide, but not be limited to, the following functionality,
 1829 modes, and display presentations per Table 3-21.

1830

Table 3-21, Radar Functionality, Modes, and Display Presentations

- | |
|---|
| <ul style="list-style-type: none"> a. Air-to-air radar simulating Active Electronically Scanned Array (AESA) capabilities. b. Simultaneous display of minimum of 20 air-to-air track files (satellite view). c. Simultaneous display of air-to-air track file vertical distribution/Vertical Situation Display (grandstand view). d. Synthetic Aperture Radar (SAR) ground mapping mode. e. Auto Acquisition Modes: Boresight mode 5x5, Vertical Scan 5x 60, Auto Lock Mode 20x 60, Slewable Sensor Search 20x20. f. Weapons envelope, launch, and fly-out presentations for own-ship and Tactical Datalink (TDL) team members. |
|---|

1831 **3.6.1.2 Air-to-Ground Function**

1832 The radar system simulation shall provide an air-to-ground capability against *constructive*
1833 *targets*.

1834 **3.6.1.3 Air-to-Air Function**

1835 The radar system simulation shall provide an air-to-air capability against *live targets*, *virtual*
1836 *targets* (if *GBTs* Connectivity is implemented) and *constructive targets*.

1837 **3.6.1.4 Synthetic Aperture Radar (SAR) Ground Mapping**

1838 The radar system simulation shall provide ground mapping imagery so that aircrew can perform
1839 radar navigation and identify turn points, waypoints, land/water interfaces, prominent *cultural*
1840 *and natural features*, and ground targeting.

1841 **3.6.1.5 Target Information**

1842 The radar system simulation shall provide both aircrew positions with air-to-air and air-to-
1843 ground radar display presentations and target information per Table 3-22.

1844

Table 3-22, Target Information

- | |
|---|
| <ul style="list-style-type: none"> a. Ground target slant range. b. Ground target bearing. c. Airborne target aspect angle. d. Airborne target altitude. e. Airborne target relative speed. f. Airborne target heading. g. Airborne target airspeed. |
|---|

1845 **3.6.1.6 Radar Detection**

1846 The radar system simulation shall provide the capability to individually program the detection
1847 range of airborne *live targets*, *virtual targets* (if *GBTs* Connectivity is implemented), and
1848 *constructive targets* during pre-flight mission planning. The radar system simulation shall
1849 detect and display airborne targets IAW the following detection rules:

- 1850 a. Probability of detection is 1.0 when the target is at a range equal to or less than the
 1851 programmed detection range value for the target;
 1852 b. Probability of detection is 0.0 when the target is at a range greater than the programmed
 1853 detection range value for the target.

1854 3.6.1.6.1 Variable Detection Range Profiles

1855 Radar system simulation shall provide the capability to alter the tactical conditions of own-ship
 1856 radar detectability via the detection range profiles defined below. The detection range profiles
 1857 shall be generated from pre-flight mission planning and shall be real-time, aircrew-selectable at
 1858 both aircrew positions such that the *aircraft* (and *GBTS* if GBTS Connectivity is implemented)
 1859 that is selecting a particular profile dictates the detectability rule that other participant *aircraft*
 1860 (*live*, *virtual*, and *constructive*) in the mission shall follow.

- 1861 a. Normal detection range profile (default): Target detection is IAW the programmed
 1862 detection range values from pre-flight mission planning.
 1863 b. Easy detection range profile: Target detection range values defined in the Normal profile
 1864 are increased by a pre-flight mission planned amount.
 1865 c. Difficult detection range profile: Target detection range values defined in the Normal
 1866 profile are decreased by a pre-flight mission planned amount.
 1867 d. Specified detection range profile: Target detection range values defined as specified by
 1868 aircrew member through pre-flight mission planning and by real-time in-flight
 1869 modification using 1 NM increments.

1870 (Note: Detection range profiles are intended to enable aircrew to simulate different tactical
 1871 conditions such as low target radar cross section, target range degradation, contested/degraded
 1872 operations, etc.)

1873 3.6.1.7 Radar Controls

1874 The radar system simulation shall provide both aircrew positions with sufficient controls to
 1875 select radar functions and modes defined in Table 3-21, synchronized between aircrew positions
 1876 and to individually manipulate the radar display presentation per Table 3-23.

1877 Table 3-23, Radar System and Display Controls

- | |
|--|
| <ul style="list-style-type: none"> a. Radar modes (see Table 3-21) b. Scan pattern c. Cursor function d. Range scale e. Airborne track file auto population (AESA) f. Airborne and ground Shoot List/Target designation g. Primary Next To Shoot/Next To Shoot or Target-to-target quick step h. Receiver gain i. Video brightness/contrast j. Zoom k. Reset radar system settings to default state |
|--|

1878 **3.6.1.8 Hands on Throttle and Stick (HOTAS)**

1879 The radar system simulation shall provide both aircrew positions with radar controls through
1880 their respective *HOTAS controls* for all radar controls defined in Table 3-23 except for items h
1881 and i.

1882 **3.6.2 Defensive Management System (DMS)**

1883 The simulated DMS will consist of Radar Warning Receiver (RWR) and expendables systems.

1884 **3.6.2.1 RWR Detection**

1885 The simulated RWR shall detect and display *live, virtual* (if *GBTs* Connectivity is implemented),
1886 and *constructive threats/targets* (airborne and ground Radio Frequency emitters, friendly, enemy
1887 and neutral).

1888 **3.6.2.2 Threat Display**

1889 The DMS shall provide threat display presentations and threat information on both LAD and
1890 HTD as applicable, per Table 3-24 at both aircrew positions.

1891 **Table 3-24, DMS Display Presentation and Visual Cues**

- | |
|--|
| <ul style="list-style-type: none"> a. Depiction of at least 20 threats simultaneously (including search, track, and launch modes) b. Unclassified threat symbology c. Expendables inventory by type (flares/chaff) and quantity d. Threat bearing relative to own-ship e. Threat range relative to own-ship f. Axis of the indication on the HTD (in the same way the RWR does) to provide <i>situational awareness</i> from which direction the threat is originating g. HTD symbology for highest priority threat and Shoot List tracks (including range, aspect angle, altitude, and airspeed of threat next to HTD threat symbol) |
|--|

1892 **3.6.2.3 DMS Controls**

1893 The DMS shall provide controls to select system modes and functions per Table 3-25 at both
1894 aircrew positions (synchronized between aircrew positions) and to individually manipulate
1895 respective display presentations.

1896 **Table 3-25, DMS Modes and Functions**

- | |
|--|
| <ul style="list-style-type: none"> a. High and low altitude priority modes b. Threat separation c. Open and priority modes d. Handoff mode |
|--|

1897 **3.6.2.4 Threat Audio**

1898 The DMS system shall provide aural warnings to both aircrew members through the *ICS* per
1899 Table 3-26.

1900 **Table 3-26, DMS/RWR Threat Audio**

- | |
|---|
| <ul style="list-style-type: none"> a. Aural tones for track (air-to-air and surface-to-air) and guidance (surface-to-air) b. New higher priority threat tone c. Aural warning in the form of “missile-missile” upon missile launch |
|---|

1901 **3.6.2.5 Expendables Systems**

1902 The DMS shall provide controls and switchology for both aircrew members to employ simulated
1903 expendables systems per Table 3-27.

1904 **Table 3-27, Expendables Systems**

- | |
|---|
| <ul style="list-style-type: none"> a. Chaff b. Flare c. In-flight reload of chaff and flare d. At least 4 countermeasure dispensing programs (from pre-flight mission planning) e. Dispensing programs are aircrew-activated (expended) via HOTAS throttle switch f. Visual and auditory release cue to own-ship aircrew g. Auditory radio cue to wingman in multi-ship missions (aircrew-selectable to OFF state) |
|---|

1905 **3.6.3 Weapon Systems**

1906 The *aircraft* shall provide *situational awareness* indicators, controls, and switchology for aircrew
1907 to employ simulated weapon systems per Table 3-28.

1908

Table 3-28, Weapons Systems

Air-to-Air Weapons
<ul style="list-style-type: none"> a. Gun (up to 6000 feet range) b. --Lead Computing Optical Sight (LCOS) (aircrew selectable) c. --Enhanced Envelope Gun Sight (EEGS) (aircrew selectable) d. High off-boresight missiles (at least 60 degrees) e. Limited off-boresight missiles (up to 30 degrees) f. Short range (IR) missiles (.2 to 8 NM) g. Medium-to-long range missiles (.5 to 35 NM)
Air-to-Ground Weapons
<ul style="list-style-type: none"> h. Constantly Computed Impact Point (CCIP) i. CCIP Gun j. Constantly Computed Release Point (CCRP) k. Inertial aided munitions (IAMs) l. General purpose bombs m. Laser guided bombs (LGBs)
Situational Awareness Indicators
<ul style="list-style-type: none"> n. Missile envelope display (air-to-air) o. Shoot cues (air-to-air) p. Missile fly-out display (air-to-air) q. Audio tones at weapons release (air-to-air, air-to-ground) r. Visual release cues (air-to-air, air-to-ground) s. Impact point display (air-to-ground) t. Time to impact (air-to-ground)

1909 **3.6.3.1 No Drop Weapon Scoring (NDWS)**

1910 The *aircraft* shall provide *No Drop Weapons Scoring (NDWS)* accuracy equivalent to the
1911 circular error probable of the selected air-to-ground non-guided weapon.

1912 **3.6.4 Embedded Training Presentation Overlays on SAD**

1913 The *aircraft* shall provide *Embedded Training* presentation overlays on the SAD presentation
1914 that depicts simulated tactical information per Table 3-29 at both aircrew positions. All overlays
1915 (simulated tactical information) shall be selectable during pre-flight mission planning and shall
1916 be cockpit-selectable at both aircrew positions.

1917

Table 3-29, Simulated Tactical Information for the Overlays on SAD

<ul style="list-style-type: none"> a. Composite tactical picture fused from on-board simulated sensors, GSS/<i>GBTS</i> if offered, and off-board information from simulated Tactical Datalink overlaid on the SAD/Navigation Display Presentation (see section 3.5.14.1.6) b. Own-ship bullseye bearing and range c. Planned routes, route lines, and waypoints (Both pre-planned and in-flight; Turn point, initial point, launch point, target symbols) d. Bullseye location and symbol e. Bullseye bearing and range to cursor readout f. Datalink data <ul style="list-style-type: none"> 1. Wingman relative position, orientation, and flight parameters 2. Other flights relative position, orientation, and flight parameters 3. Simulated targets g. Moving map with north-up and own-ship track-up orientations <ul style="list-style-type: none"> 1. Ability to manipulate zoom and change map details (e.g., 1: 500,000; 1: 250,000, 1:10 meter) 2. Range Rings correspond to Map manipulation h. Identification of friendly, bogey/unknown, and hostile air and ground targets via visual means (e.g., color, geometric presentation) i. Threat symbols j. Threat rings or lethality envelopes of simulated pre-planned and airborne threats k. Air-to-ground weapons employment symbology <ul style="list-style-type: none"> 1. Launch acceptability region 2. Release cues (air-to-ground) 3. Impact point display (air-to-ground) 4. Time to impact (air-to-ground) 5. Impact time (air-to-ground) l. Weapons data <ul style="list-style-type: none"> 1. Desired launch zone 2. Missile envelope display (air-to-air) 3. Shoot cues (air-to-air) 4. Missile fly-out display (air-to-air) m. Radar cursor n. Sensor volume (e.g., radar search volume) o. Wingman/other flight's fuel/weapons state/lock lines when targeted/shot lines displayed during A-A/A-G weapons fly-out p. Wingman Targeting Pod location Target of Interest (TOI) cue (if Targeting Pod implemented) q. Own-ship Targeting Pod SAD symbology (if Targeting Pod implemented) <ul style="list-style-type: none"> 1. Targeting Pod Display cursor 2. Targeting Pod Display cursor bearing and range 3. Own-ship Targeting Pod location TOI cue
--

1918 **3.6.5 Tactical Datalink (TDL) System Simulation**

1919 The *aircraft* shall provide controls, displays, and switchology for aircrew to employ simulated
 1920 Tactical Datalink (TDL) messaging capabilities (UNCLASSIFIED) per Table 3-30.

1921 **Table 3-30, TDL Messaging**

A. Exchange the following J-series messages relative to non-Command & Control (non-C2) Link 16 participants¹:

Basic:

- a. J2.2 Tx Air PPLI (own-ship identification)
- b. J2.x Rx PPLIs (air, ground, surface friendly identification)
- c. J7.0 Rx (track management)

Platform Situational Awareness:

- d. J3.x - Rx (air, ground, surface, EW tracks)
- e. J6.0 Rx (track/point amplification (threat))
- f. J10.2 Rx (engagement status)
- g. J15.0 Rx (threat warning)

Interceptor/Strike/Bomber Core Mission:

- h. J7.7 Rx (association)
- i. J12.0 Rx (mission assignment)
- j. J12.4 Tx/Rx (controlling unit change)
- k. J12.5 Rx (target/track correlation)
- l. J12.6 Tx/Rx (target sorting)
- m. J12.7 Tx/Rx (target pairing)
- n. J28.2(0) Tx/Rx (free text)

B. Exchange the following K-series messages relative to Close Air Support (CAS) Variable Message Format (VMF) airborne participants^{1,2}:

- a. K02.34 (*aircraft* on-station)
- b. K02.57/K02.59 (*aircraft* attack position & target designation)
- c. K02.33 (close air support aircrew briefing (i.e., “9/15 line”))
- d. K02.35 (*aircraft* depart initial point)
- e. K02.58 (CAS *aircraft* final attack control)
- f. K02.28 (CAS mission battle damage assessment report)

¹ assumes applicable aircrew message receipt/compliance processing is exercised

² assumes scenario display is populated with simulated K05.1 position report entries

1922 **3.6.6 Targeting Pod System Simulation**

1923 SEE APPENDIX D.

1924

Table 3-31, Targeting Pod Functionality

SEE APPENDIX D.

1925 **3.6.7 Mission Scenario Inputs**

1926 The *aircraft* shall accept and execute pre-planned mission scenarios (see section 3.12.3), real-
 1927 time scenario inputs (see Table 3-32) by both aircrew positions, real-time scenario inputs from
 1928 participating *aircraft* (*GBTS* is considered an aircraft for APT configurations if implementing
 1929 *GBTS* Connectivity) and real-time scenario inputs from a GSS (if GSS Connectivity is
 1930 implemented).

1931

Table 3-32, Scenario Inputs

- a. Flight plan updates
- b. Simulated Tactical malfunctions (non-emergency)
- c. Weapons criteria (loadout)
- d. Simulated threat data (Table 3-39)
- e. Reset to initial conditions
- f. J/K-series messages

1932 **3.6.8 Synchronized Combat Environment**

1933 The *aircraft* shall provide a synchronized mission scenario environment between aircrew
 1934 positions, and between participating *aircraft* (unique by multi-ship mission) (*GBTS* is considered
 1935 an *aircraft* for APT configurations if implementing *GBTS* Connectivity).

1936 **3.6.8.1 Own-ship Position**

1937 The *situational awareness* indicators and display presentations within the mission scenario
 1938 environment shall be correlated with the own-ship location, altitude, attitude, heading, and
 1939 airspeed throughout all flight phases, and APT syllabus maneuvers and mission profiles (see
 1940 APPENDIX A).

1941 **3.6.9 Geographical Area**

1942 The geographical area supported by the simulation shall be a contiguous, textured, round-earth
 1943 database(s) covering the entire Continental United States (CONUS) with no breaks in terrain,
 1944 features, models or imagery.

1945 **3.6.9.1 High Resolution Area**

1946 The CONUS geographical area database(s) shall include *high resolution areas* as follows:

- 1947 a. *High resolution areas*: Extend over the *local training area* for each of the following
 1948 main operating bases and designated bases as defined in Table 3-33.
- 1949 b. Terrain elevation data: Digital Terrain Elevation Data (DTED) Level 2 or equivalent
 1950 elevation data for the *high resolution areas*, and DTED Level 0 or equivalent elevation
 1951 data for the rest of the CONUS.

- 1952 c. *Cultural and natural features* data: Provide features found on USAF-approved 1:50,000
 1953 scale flight charts for *high resolution areas*, and at least 1:1,000,000 scale flight charts
 1954 for the rest of the CONUS.
- 1955 d. Imagery data: 10-meter resolution or better for the *high resolution areas* to support air-
 1956 to-ground targeting; and 1-meter resolution for the *local training area's* low-level routes
 1957 (extending 5 NM on either side of the route centerline) to support SAR ground mapping
 1958 mode.

1959

Table 3-33, High Resolution Areas

Main Operating Base	Designated Base
Joint Base San Antonio - Randolph, TX	Creech AFB, NV
Columbus AFB, MS	Luke AFB, AZ
Laughlin AFB, TX	Moody AFB, GA
Sheppard AFB, TX	Tyndall AFB, FL
Vance AFB, OK	

1960 3.6.10 Declutter Function

1961 The *aircraft* shall provide a declutter function to remove all *Embedded Training* presentation
 1962 overlays (simulated tactical information) on the SAD and HTD via a single-action on the *HOTAS*
 1963 *controls* at both aircrew positions.

1964 3.7 Recorded Aircraft Information

1965 The *aircraft* shall digitally record information (cockpit audio and flight data) on non-volatile
 1966 memory to support data user needs, including but not limited to, operational analyses and
 1967 integrity programs (Aircraft Structural Integrity Program, Mechanical Equipment and
 1968 Subsystems Integrity Program, and Propulsion System Integrity Program), mishap investigation,
 1969 maintenance, and *mission debriefing*.

1970 3.7.1 Military Flight Operations Quality Assurance (MFOQA)

1971 3.7.1.1 Recorded Data

1972 The *aircraft* shall record flight data to support the Military Flight Operations Quality Assurance
 1973 (MFOQA) program, as established by AFI 91-225 that captures the industry standard for mishap
 1974 prevention; but, not less than the parameter set (when available) defined by Table 1 in AFH 63-
 1975 1402 at the Range, Interval, Limits, and Resolution outlined by Table 1 (Geodetic Position
 1976 parameter is required) for fixed-wing aircraft, plus other Aircraft Information Working Group
 1977 (AIWG) defined parameters will be included.

1978 3.7.1.1.1 Airframe Tracking

1979 The *aircraft* shall record Individual Aircraft Tracking (IAT) flight data IAW MIL-STD-1530. In
 1980 addition, all Engineering and Manufacturing Development (EMD) *aircraft* and 20% of the
 1981 production *aircraft* (20% of *aircraft* in each production lot) shall have the capability to record
 1982 Structural Loads/Environment Spectral Survey (L/ESS) data IAW MIL-STD-1530.

1983 **3.7.1.2 Data Retrieval**

1984 The *aircraft* shall provide for ground personnel to download the flight data used for MFOQA
1985 analysis and integrity programs from a single point on the *aircraft* using a Government-approved
1986 mobile device with an *open standard* interface or the mission planning-compatible DTD. The
1987 *aircraft system* shall provide a method to transfer the downloaded data (from mobile device or
1988 DTD) to a standard USAF computer (USAF Standard Desktop Configuration with the most
1989 current Windows Operating System). The *aircraft system* shall provide non-proprietary means
1990 for Government personnel to decode the downloaded data into interpretable information
1991 (engineering units) for MFOQA analysis and integrity programs.

1992 **3.7.2 Mishap Investigation Data**1993 **3.7.2.1 Aircraft Recorded Data**

1994 The *aircraft* shall record cockpit audio (all internal and external communications) and flight data
1995 that meets the minimum parameter set defined in AFH 63-1402 for fixed wing aircraft, plus other
1996 AIWG-defined parameters. Parameter 3.2 “Geodetic Position (Lat/Long)” in AFH 63-1402 is
1997 required and shall be recorded to the maximum resolution at which the installed system is
1998 capable of operating.

1999 **3.7.2.1.1 Crash Survivable Recorder(s)**

2000 The *aircraft* shall have a flight data recorder (FDR) that records and retains at least the last 25
2001 hours of flight data and a cockpit voice recorder (CVR) that records and retains at least the last
2002 two hours of acoustic data. The FDR and CVR shall be crash survivable and comply with
2003 Technical Standard Orders (TSO)-C124c and TSO-C123c, respectively (TSO requirement for
2004 underwater locator beacon applies.) (Note: A combination FDR/CVR is acceptable.)

2005 **3.7.2.2 Data Retrieval**

2006 In order to ensure the FDR and the CVR are operating correctly, the *aircraft system* shall provide
2007 for ground personnel to periodically download recorded data without requiring recorder removal
2008 from the *aircraft*. Additionally, the *aircraft system* shall provide the non-proprietary means for
2009 Government personnel to decode the downloaded data into interpretable information
2010 (engineering units) for mishap investigation.

2011 **3.7.2.3 Ejection Seat Recorded Data**

2012 In the event of an ejection sequence, the ejection seat shall be capable of recording the event
2013 times of seat functions, selected mode, any sensed air pressures, and the linear accelerations
2014 about three orthogonal axes, at a minimum. Additionally, the *aircraft system* shall provide the
2015 non-proprietary means for Government personnel to decode the downloaded data into
2016 interpretable information (engineering units) for mishap investigation.

2017 3.7.3 Maintenance Data**2018 3.7.3.1 Recorded Data**

2019 The *aircraft* shall record time-stamped maintenance and engine data that includes discrepancies
2020 and health, over-G event/level, actual takeoff and landing times, engine start and stop times,
2021 weight on/off-wheels times, *built-in test (BIT)* information, Condition-Based Maintenance Plus
2022 (CBM+) information, systems/subsystems/*components* faults, and other AIWG-defined
2023 parameters. The *aircraft* shall record at least 18 hours of data without overwriting or otherwise
2024 losing unique data. (Note: 18 hours define worst case of three 2-hr sorties/day for three
2025 consecutive days for cross country training missions without download until the *aircraft* returns
2026 to home station.)

2027 3.7.3.1.1 CBM+ Function

2028 The *aircraft* shall have a CBM+ function to capture and store diagnostic/prognostic information.
2029 The CBM+ function shall capture and store all relevant data associated with detected *faults*. The
2030 *aircraft system* shall provide for the capability to conduct analysis for CBM+ of all recorded
2031 aircraft information including, but not limited to, trending of historical data, identifying emergent
2032 failures, and aggregating data (e.g., operational, environmental, system and subsystem condition,
2033 etc.) to determine prognostic indicators.

2034 3.7.3.2 Aircraft Turn Data Viewing

2035 The *aircraft* shall provide *fault detection* and *fault isolation* information at the *Line Replaceable*
2036 *Module (LRM)* and *Line Replaceable Unit (LRU)* level, viewable in the cockpit and at the
2037 *aircraft* via a single point location (using a Government-approved mobile device with an *open*
2038 *standard* interface) necessary to repair and turn the *aircraft* for next sortie of that day.

2039 3.7.3.3 End of Fly Day Data Retrieval

2040 The *aircraft* shall provide for downloadable maintenance and engine data (as defined in section
2041 3.7.3.1) and all systems/subsystems/*components faults* from a single point on the *aircraft*, using
2042 a Government-approved mobile device with an *open standard* interface. Additionally, the
2043 *aircraft system* shall provide the non-proprietary means for Government personnel to decode the
2044 downloaded data into interpretable information (i.e., engineering units).

2045 3.7.3.4 Maintenance Data Collection & Management System

2046 The *aircraft* maintenance data recording function shall be compatible with the Integrated
2047 Maintenance Data System (IMDS) and the Comprehensive Engine Management System (CEMS)
2048 using an XML format, as the electronic data transfer language for both systems, compatible with
2049 the USAF Standard Desktop Configuration with the most current Windows Operating System.

2050 3.7.4 Mission Debrief Data**2051 3.7.4.1 Recorded Data**

2052 The *aircraft* shall provide for recording and storage (at least 240 minutes of circular memory
2053 storage that automatically overwrites oldest recorded data after storage is full) of sufficient data

2054 types to accomplish mission and flight reconstruction during post-flight *mission debriefing* (see
2055 section 3.12.4).

2056 **3.7.4.1.1 Bookmarks**

2057 The *aircraft* shall provide for flagging/marking events (*bookmark*) by both aircrew members as
2058 events occur during mission recoding. Additionally, the *aircraft* shall automatically *bookmark*
2059 the following mission events during mission execution:

- 2060 a. Simulated Weapon Release, Trigger Pull, Cage/Uncage (missile, bomb, gun)
- 2061 b. Master Caution Triggered
- 2062 c. Landing Gear Change
- 2063 d. Weight on/off-wheels
- 2064 e. *Embedded Training* Scenario Start
- 2065 f. Simulated Master Arm On/Off
- 2066 g. Simulated Expendables (Chaff /Flare) Dispense
- 2067 h. Simulated SAM/AAA Launch
- 2068 i. Stall
- 2069 j. Over-G
- 2070 k. Simulated Master Mode Change (air-to-air, air-to-ground, navigation)

2071 **3.7.4.2 Data Retrieval**

2072 The *aircraft* shall provide for immediate post-flight data retrieval of recorded data via mission
2073 planning-compatible DTD.

2074 **3.7.4.3 Data Quality**

2075 Recorded data (audio and video) shall have sufficient resolution so that it can be replayed
2076 without distortion (*readable*) using the intended mission debriefing system defined in 3.12.4.

2077 **3.8 Product Support**

2078 **3.8.1 Operational Availability (A_o)**

2079 *Operational Availability* shall be at least 80%. A_o shall be calculated using the definition of
2080 *Mission Capable (MC)* Rate IAW TO 00-20-2 Appendix L, Index 114.

$$A_o = MC \text{ Rate} = \frac{(\text{FMC Hours} + \text{PMC Hours})}{\text{Total Possessed Hours}} \times 100$$

2081 **3.8.2 Materiel Availability (A_m)**

2082 *Materiel Availability* shall be at least 76%. A_m shall be calculated using the definition of
2083 Aircraft Availability (AA) Rate IAW TO 00-20-2 Appendix L, Index 107. (Note: Total Active
2084 Inventory includes Primary Aircraft Inventory, Backup Aircraft Inventory, and Attrition Reserve
2085 per AFI 16-402.)

$$A_m = AA = \frac{\text{Mission Capable Hours}}{\text{Total Active Inventory Hours}} \times 100$$

2086 **3.8.3 Materiel Reliability (R_m)**

2087 *Materiel Reliability* shall be at least 95%, calculated IAW formula given below. Sorties
 2088 attempted are the sum of sorties flown and ground aborts. *Code 3's* and ground aborts are
 2089 defined IAW TO 00-20-2 Appendix L, Index 9 and 4, respectively. Only ground aborts due to
 2090 maintenance causes (GA_{MX}) shall be included in the calculation of R_m .

$$R_m = \frac{\text{Sorties Attempted} - \text{Code 3's} - \text{Ground Abort}_{MX}}{\text{Sorties Attempted}} \times 100$$

2091 **3.8.4 Mean Time Between Failures (MTBF)**

2092 *Mean Time Between Failures (MTBF)* Type 1 (Inherent) shall be at least 10 hours, calculated
 2093 IAW TO 00-20-2 Appendix L, Index 92. It includes all Type 1 inherent *failures*. For total
 2094 *aircraft* roll-ups, the usage factor (UF) and quantity per application (QPA) shall be set to one.

$$MTBF_{\text{Type 1}} = \frac{\text{Total Flying Hours} \times \text{QPA} \times \text{UF}}{\text{Inherent Failures}}$$

2095 **3.8.5 Fix Rate**

2096 Eight-hour *Fix Rate* shall be at least 75%, calculated IAW TO 00-20-2 Appendix L, Index 14.

$$\text{8 Hour Fix Rate} = \frac{\text{Number of Aircraft Breaks Fixed Within 8 Hours After Landing}}{\text{Total Number of Aircraft Breaks}} \times 100$$

2097 **3.8.6 Mean Time Between Maintenance (MTBM)**

2098 *Mean Time Between Maintenance (MTBM)* Total shall be at least 1.5 hours, calculated IAW TO
 2099 00-20-2 Appendix L, Index 95. It includes all Type 1 inherent *failures*, Type 2 induced *failures*,
 2100 and Type 6 no defect actions. For total *aircraft* roll-ups, the UF and QPA shall be set to one.

$$MTBM \text{ Total} = \frac{\text{Total Flying Hours} \times \text{QPA} \times \text{UF}}{\text{Total Actions (1, 2, and 6)}}$$

2101 **3.8.7 Mean Time To Repair (MTTR)**

2102 *Mean Time To Repair (MTTR) on-equipment* shall be less than or equal to 0.75 hours, calculated
 2103 IAW TO 00-20-2 Appendix L, Index 103.

$$MTTR = \frac{\text{Repair Hours (On)}}{\text{Repair Actions (On)}}$$

2104 **3.8.8 Turn-Around Time**

2105 SEE APPENDIX D.

2106 **3.8.9 Diagnostics**2107 **3.8.9.1 Integrated Diagnostics (ID) Percent Fault Detection (PFD) (Critical Faults)**

2108 Using *Integrated Diagnostics (ID)*, the *Percent of Fault Detection (PFD)* shall be at least 99%
2109 for *on-equipment (aircraft) critical faults*.

$$\text{PFD (critical faults)} = \frac{\text{Number of Correct Detections of Critical Faults}}{\text{Correct Detections of Critical Faults} + \text{Incorrect Detections of Critical Faults}} \times 100$$

2110 **3.8.9.2 ID PFD (All Faults)**

2111 Using *ID*, the *PFD* shall be at least 95% for all *on-equipment (aircraft) faults*.

$$\text{PFD (all faults)} = \frac{\text{Number of Correct Detections of All Faults}}{\text{Correct Detections of All Faults} + \text{Incorrect Detections of All Faults}} \times 100$$

2112 **3.8.9.3 ID Percent Fault Isolation (PFI) (Critical Faults)**

2113 Using *ID*, the *Percent of Fault Isolation (PFI)* shall be at least 99% for *on-equipment (aircraft)*
2114 *critical faults*.

$$\text{PFI (critical faults)} = \frac{\text{Number of Correct Critical Isolations}}{\text{Total Number of Correct Critical Detections}} \times 100$$

2115 **3.8.9.4 ID PFI (All Faults)**

2116 Using *ID*, the *PFI* shall be at least 95% for all *on-equipment (aircraft) faults*.

$$\text{PFI (all faults)} = \frac{\text{Number of Correct Isolations}}{\text{Total Number of Correct Detections}} \times 100$$

2117 **3.8.9.5 Built-In-Test (BIT) Functions**

2118 The *aircraft* shall have *Start-up*, *Continuous*, and *Initiated BIT* functions. *Initiated BIT* shall only
2119 be available for execution on the ground.

2120 **3.8.9.5.1 BIT Functions Display**

2121 The *BIT* system shall display to the aircrew all faults that are determined to be necessary for
2122 aircrew notification as defined by the FMECA and Crew Systems Working Group. All faults
2123 shall be displayable for maintenance action IAW section 3.7.3.2.

2124 **3.8.9.6 Safety Critical (SC) BIT Coverage**

2125 The *aircraft BIT* system shall detect all *Safety Critical (SC) faults* (structural faults are
2126 excluded).

2127 **3.8.9.6.1 BIT PFD (SC Faults)**2128 Using *BIT*, the *PFD* shall be at least 99% for *on-equipment (aircraft) SC faults*.

$$\text{PFD (SC faults)} = \frac{\text{Number of Correct SC Detections}}{\text{Correct Detections of SC Faults} + \text{Incorrect Detections of SC Faults}} \times 100$$

2129 **3.8.9.6.2 BIT PFI (SC Faults)**2130 Using *BIT*, the *PFI* shall be at least 95% for *BIT detectable on-equipment (aircraft) SC faults*.

$$\text{PFI (SC faults)} = \frac{\text{Number of Correct SC Isolations}}{\text{Total Number of Correct SC Detections}} \times 100$$

2131 **3.8.9.7 BIT PFD (All Faults)**2132 Using *BIT*, the *PFD* shall be at least 93% for all *BIT detectable on-equipment (aircraft) faults*.

$$\text{PFD (all faults)} = \frac{\text{Number of Correct Detections}}{\text{Correct Detections of All Faults} + \text{Incorrect Detections of All Faults}} \times 100$$

2133 **3.8.9.8 BIT PFI (All Faults)**2134 Using *BIT*, the *PFI* shall be at least 80% for all *BIT detectable on-equipment (aircraft) faults*.

$$\text{PFI (all faults)} = \frac{\text{Number of Correct Isolations}}{\text{Total Number of Correct Detections}} \times 100$$

2135 **3.8.10 Mean Flight Hours Between Sortie Aborting False Alarms (MFHBSAFA)**2136 The *aircraft Mean Flight Hours Between Sortie Aborting False Alarms (MFHBSAFA)* shall be at
2137 least 450 hours. *Sortie aborting false alarms* shall be calculated by counting related *false alarms*
2138 of system functions that result in a sortie abort (air and ground).

$$\text{MFHBSAFA} = \frac{\text{Flight Hours}}{\text{Total number of Sortie Aborting False Alarms}}$$

2139 **3.8.11 Mean Flight Hours Between False Alarms (MFHBFA)**2140 The *aircraft Mean Flight Hours Between False Alarms (MFHBFA)* shall be at least 50 hours.
2141 *False alarms* shall be calculated by counting *false alarms* of all system functions.

$$\text{MFHBFA} = \frac{\text{Flight Hours}}{\text{Total Number of False Alarms}}$$

2142 3.8.12 Nameplates and Product Marking

2143 The *aircraft system* shall have nameplates and product identification markings, including Item
2144 Unique Identification, IAW MIL-STD-130, and MIL-STD-129.

2145 3.8.13 Maintenance Concept

2146 The *aircraft* shall be compatible with and maintained using a USAF two-level maintenance
2147 concept comprised of *Organizational-Level (O-Level) maintenance* and *Depot-Level (D-Level)*
2148 *maintenance*. In addition, the *aircraft* shall be compatible with existing *Intermediate-Level (I-*
2149 *Level) maintenance* capability.

2150 3.8.13.1 Propulsion System Sustainability

2151 The *aircraft* shall provide for ground personnel to accomplish engine *O-Level maintenance*
2152 (including removal and replacement of engine *Line Replaceable Units (LRUs)*, scheduled
2153 inspections, and dynamic testing at all engine power settings per applicable technical data) with
2154 engine(s) installed in the *aircraft*.

2155 3.8.13.2 Engine Start System Sustainability

2156 For *aircraft* with engine start unit(s) (APU or JFS), the start unit shall be considered and
2157 maintained as a *Line Replaceable Unit (LRU)* using the two-level maintenance concept (*O-Level*
2158 *to D-Level*). (Note: Besides LRU removal and replacement actions, the *O-Level maintenance*
2159 will be limited to removal and replacement of items such as ignitor plugs/leads, fuel controls,
2160 start system controllers, etc.)

2161 3.8.14 Support Equipment (SE)**2162 3.8.14.1 Support Equipment Environment**

2163 All SE shall be operable, maintainable, transportable, and storable in all operational climatic and
2164 environmental conditions (as defined in 3.9.1.1 and 3.9.3 for ground conditions only).

2165 3.8.14.2 Support Equipment/Facility Interfaces

2166 All support equipment and tools shall use only standard USAF electrical, pneumatic, and
2167 hydraulic power.

2168 3.8.14.3 Aircraft/Support Equipment Interfaces

2169 The *aircraft* shall interface with USAF common SE as identified in Table 3-34.

2170

Table 3-34, Aircraft/SE Interfaces

Support Equipment Nomenclature	Functional Capability	Status	Standards	Support Equipment Description (Compatibility Requirements)
Air Conditioner	Provides external cool air to <i>aircraft</i> interior	Existing	STANAG-3208 ASSE MS33562D	8in is standard for air conditioner side of interface and 4in is standard for aircraft side
Bleed Air	Provides compressed air for engine start or perform MX operations	Existing	STANAG-3372 ASSE MS33740C	Standard AF bleed air hose connection
Nitrogen Cart	Generates nitrogen for MX operations	Existing	AN6287	Standard aircraft high pressure Schrader valve
Generator	Provides external electrical power to activate/test <i>aircraft</i> systems	Existing	SAE-AS25486	Standard NATO 6 pin 400 Hz connector
Hydraulic Test Stand	Provides external hydraulic power to activate/test <i>aircraft</i> hydraulic systems	Existing	MIL-DTL-25427	#12 and #16 fittings for supply and return
Oil Cart	Service oil in <i>aircraft</i> engines	Existing	STANAG-3595 ASSE MIL-DTL-25677	
Tow Bar	Tow <i>aircraft</i>		STANAG-3278 ASSE MIL-STD-805	
Cabin Pressure tester	Apply air pressure to <i>aircraft</i> cockpit for testing		STANAG-3315 ASSE	
Jacking			STANAG-3098 ASSE	
Lifting Sling Attachment			STANAG-3237 ASSE	
Grease Fittings	Apply grease to <i>aircraft</i> components		STANAG-3766 ASSE	
Static Grounding Connections			STANAG-3632 ASSE NATO STANDARD AAEP-02	
Tire Valve Couplings	Service tire with nitrogen		STANAG-3209 ASSE	

2171 **3.8.15 Maintenance Work Environment**2172 **3.8.15.1 Climatic/Environmental Work Conditions**

2173 The *aircraft system* shall provide for personnel to perform all required maintenance tasks in all
 2174 operational climatic and environmental conditions (as defined in 3.9.1.1 and 3.9.3 for ground
 2175 conditions only) while complying with AFI 91-203.

UNCLASSIFIED

2176 **3.8.15.2 Maintainer Accommodation**

2177 The *aircraft system* shall provide for maintainers, with the anthropometric range as defined in
 2178 Table 3-35, to perform service, launch, recovery, and Technical Order maintenance tasks that are
 2179 required to be performed outdoors while wearing applicable PPE and cold weather gear. All
 2180 remaining maintenance tasks shall accommodate the maintainer while wearing applicable PPE.

2181 **Table 3-35, Maintainer Anthropometric Cases**

Attribute	Case 1	Case 2	Case 3
Stature (± 1 inch)	58	65	74
Weight (± 10 lbs)	93	211	239

2182 **3.8.16 Manpower and Personnel**

2183 The *aircraft system* shall be compatible with the current USAF personnel aptitudes, knowledge,
 2184 and skill levels to support and maintain the *aircraft system* utilizing no more than the current
 2185 manpower levels.

2186 **3.9 Climatic and Environmental Conditions**

2187 The *aircraft* shall perform all required missions before, during, and after exposure to operating
 2188 and non-operating environments specified in 3.9.1, 3.9.2, and 3.9.3.

2189 **3.9.1 Natural Climate**2190 **3.9.1.1 Operational Conditions**

2191 The *aircraft* shall operate continuously, without degradation to mission requirements and ground
 2192 maintenance activities, in the operational conditions (surface ambient air temperature, solar
 2193 radiation, and relative humidity) as described in MIL-STD-810, Part One, Annex C, Table C-I,
 2194 Climatic Design Type, Basic, including worst case corresponding internal temperatures with
 2195 cockpit closed, and remain fully *mission capable*.

2196 **3.9.1.2 Environment Condition Lapse Rates for Non-Standard Days**

2197 The *aircraft* shall operate continuously, at all altitudes up to the maximum *absolute ceiling*,
 2198 without degradation to mission requirements and ground maintenance activities, in Cold Day and
 2199 Hot Day operational conditions as described in Table 3-36, and remain fully *mission capable*.

2200

Table 3-36, Cold Day and Hot Day Lapse Rates

Cold Day			Hot Day		
H, ft.	°F	°C	H, ft.	°F	°C
0	-25.6	-32.0	0	109.4	43.0
5,000	-6.7	-21.5	5,000	86.6	30.3
10,000	-16.3	-26.8	10,000	66.4	19.1
15,000	-31.0	-35.0	15,000	47.4	8.5
20,000	-46.7	-43.7	20,000	31.1	-0.5
25,000	-61.7	-52.1	25,000	15.9	-9.0
30,000	-72.2	-57.9	30,000	2.9	-16.2
35,000	-79.2	-61.8	35,000	-10.6	-23.7
40,000	-83.5	-64.2	40,000	-25.3	-31.8
45,000	-86.5	-65.8	45,000	-37.8	-38.8
50,000	-96.6	-71.4	50,000	-40	-40
55,000	-102.4	-74.7	55,000	-40	-40
60,000	-99.6	-73.1	60,000	-40	-40
65,000	-98.7	-72.6	65,000	-40	-40

2201 **3.9.1.3 Icing Conditions**

2202 The *aircraft* shall be capable of safely climbing and descending through at least 5,000 vertical
 2203 feet of *light rime icing* from sea level to 22,000 feet *PA* using Technical Order-prescribed normal
 2204 operating procedures and airspeeds with no worse than Level 2 (*Tolerable*) *flying qualities*.

2205 **3.9.2 Induced Environment**2206 **3.9.2.1 Storage and Transit Conditions**

2207 The *aircraft* shall operate after exposure to storage and transit conditions (air temperature and
 2208 relative humidity) described in MIL-STD-810, Part One, Annex C, Table C-I, Climatic Design
 2209 Type, Basic.

2210 **3.9.2.2 Operating Conditions**

2211 The *aircraft* shall operate continuously in *induced environments* generated during *aircraft*
 2212 operations and maintenance (altitude, thermal, shock, vibration, acceleration, acoustic noise, and
 2213 explosive atmosphere) IAW MIL-STD-810.

2214 **3.9.3 Electromagnetic Environmental Effects (E3)**

2215 The *aircraft* shall be electromagnetically compatible within itself, its operational electromagnetic
 2216 environment, and interfaces as specified in MIL-STD-464 as applicable.

2217 **3.10 Architecture and Security**2218 **3.10.1 Critical Program Information**

2219 The *aircraft system* shall include *anti-tamper* measures to protect *Critical Program Information*
2220 identified in the Anti-Tamper Plan.

2221 **3.10.2 Cybersecurity**

2222 The *aircraft system* shall include *security controls* identified in the Security Requirements
2223 Traceability Matrix (SRTM) resulting from the Risk Management Framework and System
2224 Security Engineering Working Group activities.

2225 **3.10.3 Open Systems Architecture**

2226 As a minimum, all *key components and interfaces* for hardware and *Operational Flight*
2227 *Program(s)/Software Item(s) (OFP/SI)* shall employ open system, service-oriented architecture
2228 that utilizes a modular design in which functionality is partitioned into discrete, cohesive and
2229 self-contained units with documented, publicly available, non-proprietary, commercial, or
2230 industry interfaces and standards to the maximum extent feasible for readily accommodating
2231 competitive future system upgrades and modifications. The architecture shall be layered and
2232 modular or decoupled and flexible/scalable (e.g., Open Mission Systems (OMS), Future
2233 Airborne Capability Environment (FACE)) and maximizes the use of standards-based
2234 Commercial-Off-The-Shelf (COTS)/Non-Developmental Item (NDI) hardware, operating
2235 systems, and middleware that utilize either non-proprietary or non-vendor-unique module or
2236 *component* interfaces. If OMS is offered, the architecture shall include a Tier-2 compliant
2237 Mission Package IAW the Open Mission Systems Definition and Documentation (OMS D&D)
2238 V1.1. If FACE is offered, the architecture shall comply with the technical standard for FACE,
2239 Edition 2.1. Otherwise, the offered architecture shall comply with the requirement as stated and
2240 further detailed in the Open Systems Management Plan CDRL. As a minimum, *key components*
2241 *and interfaces* include those associated with the *LAD* subsystem, the central mission processing
2242 subsystem, the flight management processing subsystem, the *Embedded Training* processing
2243 subsystem, the central maintenance/*BIT* processing subsystem, and the data retrieval and
2244 recording processing subsystems. If proprietary standards are used, then full design disclosure
2245 and Government Purpose Data Rights will be provided IAW the contract. (Note: See SOW
2246 paragraph: Open System, Modular Design for additional definition).

2247 **3.10.4 Computing Resources**2248 **3.10.4.1 Memory Storage**

2249 The *aircraft* shall provide non-volatile memory growth equal to 200% of utilized memory per
2250 storage device (measured at System Verification Review (SVR)) for storing the CONUS
2251 navigation and terrain databases (including the database(s) for the *Embedded Training*
2252 simulations). (Note: Requirement applies to all databases for the *Embedded Training*
2253 simulations.)

2254 **3.10.4.2 Computer Resources**

2255 Each newly developed or modified *component* containing an *OFP/SI* shall have at least 100%
2256 installed reserve memory, processor throughput, and data bus throughput (measured at SVR).

2257 **3.10.4.3 Operational Flight Program (OFP)/Software Item (SI) Versions**

2258 The *aircraft* shall electronically display each of the *OFP/SI* version(s) and any associated
2259 databases, using appropriate groupings of *OFP/SI* and data installed on the *aircraft*, by
2260 *component* or other discriminator, for both maintenance and aircrew personnel available by user
2261 request as well as at system power-up.

2262 **3.10.4.4 Operational Flight Program (OFP) / Software Item (SI) Load and Verification**

2263 The *aircraft system* shall provide for all loadable *OFP/SI* software and updates, and any
2264 associated loadable databases, to be loaded and verified by ground maintenance personnel
2265 through standard interface(s) consolidated at a single location within 30 minutes for each *OFP/SI*
2266 and each associated database.

2267 **3.10.5 ARINC 610 Simulator Compatibility**

2268 The *aircraft* shall incorporate ARINC 610 simulator compatibility into the design of newly
2269 developed and modified *aircraft components* and software that will also be used in the *GBTS*.

2270 **3.11 Utility Attributes**2271 **3.11.1 Fuel Standards**

2272 The *aircraft* shall use fuel standards as follows:

- 2273 a. *Primary fuels*:
2274 ASTM-D1655 Jet A with military additives, ASTM-D1655 Jet A-1 with military
2275 additives, MIL-DTL-83133 Grade JP-8, and MIL-DTL-83133 Grade JP-8 +100
2276 b. *Alternate fuels*:
2277 MIL-DTL-5624 Grade JP-5 and ASTM-D1655 Jet A
2278 c. *Emergency fuels*:
2279 MIL-DTL-5624 Grade JP-4 and ASTM-D1655 Jet-B
2280

2281 Note: The following additives must be injected into the fuel at the concentrations specified in
2282 MIL-DTL-5624 or MIL-DTL-83133:

- 2283 a. Corrosion inhibitor/lubricity improver (CI/LI) (MIL-PRF-25017)
2284 b. Fuel system icing inhibitor (FSII) (MIL-DTL-85470)
2285 c. An approved antioxidant (AO) material listed in paragraph 3 of MIL-DTL-5624 or
2286 MIL-DTL-83133
2287 d. An approved Static Dissipater Additive (SDA) listed in paragraph 3 of MIL-DTL-5624
2288 or MIL-DTL-83133

2289 **3.11.1.1 Fuel Contaminants**

2290 The *aircraft* fuel system shall use and be compatible with fuels containing the following
 2291 contaminants per Table 3-37.

2292 **Table 3-37, Fuel Contaminant Mixture**

Contaminant	Particle Size (Microns)*	Quantity (gms per 1000 liters)
Iron Oxide	0 – 5	19
	5 – 10	1.0
Sharp Silica Sand	150 – 300	0.7
	300 – 420	0.7
ISO 12103-1, A4 Coarse Test Dust	Mixture as provided by ISO document	5.3
Cotton linters	Staple below 7 U.S. Dept. of Agriculture Grading Standards	0.07
Iron Chips	150 – 500	10
Aluminum Chips	150 – 500	10
Graphite Epoxy Composite	0 – 45 (23%)	5.2
Explosion Suppressant Foam (ESF) Particles** ESF contaminant is defined as foam in compliance with MIL- PRF-87260.	45 – 150 (26%)	0.75**
	150 – 300 (8%)	
	300 – 425 (32%)	
	425 – 710 (11%)	
	1 – 100** Distribution is random utilizing method outlined and cut utilizing the methods in section 4.2.4 of MIL-PRF-87260, excluding a hot wire cutter.	

Notes:

2293 * The contamination used for testing is graded by the sieve method. Particles considerably larger than
 2294 500 microns size can pass through the sieve. Particles in the 700 - 800 micron range have been
 2295 found in certified test contamination samples.

2296 ** For aircraft with fuel tank Explosion Suppressant Foam (ESF) installed in the tanks, OR which may
 2297 aerial refuel from tankers with ESF.

2298 3.11.2 Lubrication Oil Standards

2299 The *aircraft* shall meet the requirements of this specification using lubricant oils conforming to
2300 MIL-PRF-7808 and MIL-PRF-23699.

2301 3.11.3 Space, Weight, Power and Cooling (SWaP-C) Margins

2302 This requirement accommodates future (unplanned) installations of *components*. Space and
2303 weight margins are based on the volume of generic classes of *components* that would allow for
2304 future installation of *components* without changes to existing structure, mounting location, or
2305 other compartment features. Power margins require the allocation of generator and/or battery
2306 capacity such that the future capability can be added without changing the electrical system
2307 configuration or capacity. Cooling margins require allocation of cooling capacity such that the
2308 future capability can be added without changing the ECS configuration or capacity. Margins
2309 defined in this section are over and above the growth paths specified for Aerial Refueling
2310 (section 3.4.2) and for the WSSP (Table 3-38, Loadout # 3). The *aircraft* will need to meet the
2311 performance requirements defined in section 3.1 with SWaP-C margin requirements met.

2312 3.11.3.1 Space

2313 The *aircraft* shall provide excess space to accommodate internally a minimum of 3 additional
2314 LRUs each conforming to either 1½-Air Transport Radio (ATR) enclosure size (15.38” W x
2315 19.62” L x 7.62” H) or 12-Modular Concept Unit (MCU) enclosure size (15.37” W x 12.67” L x
2316 7.62” H).

2317 3.11.3.2 Weight

2318 The *aircraft* shall provide capability to accommodate a minimum of 3 additional LRUs,
2319 weighing 88 lbs. each (described in section 3.11.3.1).

2320 3.11.3.3 Power

2321 The *aircraft* primary electrical power subsystem shall meet the requirements in section 3.4.5 and
2322 have a built-in continuous kilovolt-ampere surplus capacity at least 30% greater than the
2323 maximum continuous electrical load of the initial production *aircraft*.

2324 3.11.3.4 Cooling

2325 The *aircraft* ECS shall meet the baseline requirement in section 3.4.3 while maintaining a built-
2326 in surplus cooling capacity of not less than 25% for future (unplanned) growth.

2327 3.11.4 Aircraft Maintenance Safety Protection Equipment (MSPE) Stowage

2328 The *aircraft* shall provide for internal stowage (not including cargo/travel pods) that
2329 accommodates the minimum flyaway items required for Maintenance Safety and Protection
2330 Equipment (e.g., grounding cable, engine covers, gear pins, pitot covers, AOA blocks) as defined
2331 in the -21 Technical Order. This stowage space shall be accessible by ground maintenance
2332 personnel and shall be external to the cockpit.

2333 **3.11.5 External Stores**

2334 The *aircraft* shall be capable of carrying the non-jettisonable external stores identified in Table
2335 3-38.

2336 **Table 3-38, Loadout Configurations and External Stores**

Loadout #	Store Nomenclature and Characteristics	Number Carried	Note
1	MXU Cargo/Travel Pod - P/N 402136-3 - NSN 1680-01-538-0545 - Capacity 300 lbs. - Usable volume 4.75 cubic feet - Load factor 5.0 G in symmetric flight, 4.0 G in asymmetrical loading - Total length 129.6 inches - Max diameter 18.6 inches - Empty weight 104 lbs. - Interface MIL-STD-8591	1	140 lbs. worth of gear will be carried in the pod.
2	Next Generation Cargo Pod - P/N 400850-3 - NSN 1680-01-459-1268 - Capacity 600 lbs. - Usable volume 19 cubic feet - Load factor 7.3 G - Total length 153 inches - Max diameter Elliptical 23.30 x 34.06 inches - Empty weight 320 lbs. - Interface MIL-STD-8591	1	140 lbs. worth of gear will be carried in the pod.
3	Weapon Systems Support Pod (WSSP) - Total length 144.5 inches - Max diameter 10.3 inches (Excluding fins and hardback) - Weight 386 lbs. - Interface MIL-STD-8591 - Power requirements: 3 phase 400 Hz 115/200VAC @ 10A per phase	1	Growth path for future integration of EW Training Pods. (Note: WSSP characteristics are based on the ALQ-167.)

2337 **3.11.5.1 Stores Electrical Interfaces**

2338 The *aircraft* shall have electrical interface connector(s) and wiring installed that are compatible
2339 with MIL-STD-1760, Class II to avoid the cost of adding Group A for a future WSSP
2340 integration. (Note: Wiring, at the equipment-bay end, will be capped and stowed.)

2341 **3.11.6 Environment, Safety and Occupational Health (ESOH)**2342 **3.11.6.1 Safety**

2343 Unless otherwise specified, the *aircraft* including systems/subsystems/components shall be fail-
2344 safe such that no single point *failure* or combination of *failures*, with a *failure* rate greater than
2345 1×10^{-6} per flight hour can cause a critical or catastrophic mishap as defined in MIL-STD-882,

2346 paragraph 4.5.1. Fail-safe is defined as a design feature that ensures that the *aircraft* and
2347 systems/subsystems/*components* remain safe or in the event of a *failure*, shall cause the *aircraft*
2348 and systems to revert to a state that shall not cause a mishap. Any new or peculiar support
2349 equipment and procedure procured for the *aircraft* shall be designed in accordance with the Air
2350 Force Occupational Safety and Health Standards (AFOSH). In the absence of appropriate
2351 AFOSH standards, Occupational Safety and Health Administration (OSHA) standards shall
2352 apply.

2353 **3.11.6.2 Federal and State Laws**

2354 The *aircraft system* shall comply with applicable environmental, pollution control, and
2355 occupational health laws and regulations, from federal, state, and local levels.

2356 **3.11.6.3 Hazards**

2357 The *aircraft system* environmental, safety, and occupational health hazards shall be eliminated,
2358 minimized, or controlled, so that mishap risks are acceptable per MIL-STD-882.

2359 **3.11.6.4 Energetic Materials**

2360 The *aircraft system* shall preclude inadvertent and unintended fire and explosive initiation effects
2361 on energetic materials (i.e., cartridge- and propellant-activated devices), caused by unplanned
2362 stimuli (i.e., thermal, mechanical, electrical, and electromagnetic sources).

2363 **3.11.6.5 Hazardous Materials (HAZMAT)**

2364 Hazardous materials shall be minimized in the design, operation, maintenance, and disposal of
2365 the *aircraft system* IAW MIL-STD-882 including Task 108, National Aerospace Standard (NAS)
2366 411, NAS 411-1 including listed HAZMAT, and all other applicable laws and regulations. In
2367 addition to the prohibited HAZMAT listed in NAS411-1, all Ozone Depleting Substances (ODS)
2368 shall be prohibited.

2369 **3.11.6.6 Air Force Occupational Safety**

2370 The *aircraft system* shall comply with Air Force Consolidated Occupational Safety Instruction,
2371 AFI 91-203.

2372 **3.11.7 Airworthiness Certification**

2373 The *aircraft system* shall meet all USAF airworthiness requirements for achieving a Military
2374 Type Certificate. *Aircraft system* design, production, and delivery shall be compliant with the
2375 approved USAF certification basis identified in the APT Tailored Airworthiness Certification
2376 Criteria and requirements within DoD Directive 5030.61, AFD 62-6, and AFI 62-601.

2377 **3.11.8 Geographic Intelligence (GEOINT)**

2378 The *aircraft system* shall use standard National Geospatial-Intelligence Agency (NGA)
2379 geographic intelligence (GEOINT) visual and data products that represent the world in the WGS
2380 84 geodetic reference datum.

2381 3.11.9 Barrier Rollover

2382 The *aircraft* shall be capable of taxiing over non-deployed runway arresting systems (e.g., BAK
2383 12/13) without damaging the external stores, landing gear, and doors.

2384 3.12 Mission Support

2385 The *aircraft system* will include mission support functions and systems required for mission
2386 planning, mission scenario generation, *mission debriefing*, and data transfer. The mission
2387 planning, mission scenario generation, and *mission debriefing* functions and systems shall be
2388 compatible with the USAF Standard Desktop Configuration with the most current Windows
2389 Operating System.

2390 3.12.1 Data Transfer

2391 The *aircraft* shall provide for data transfer between a mission planning-compatible DTD and the
2392 *aircraft* subsystems.

2393 3.12.1.1 DTD Design

2394 The DTD shall be industrial-grade MIL-STD-810 compliant, commercially-based, use non-
2395 proprietary software and media, and have the appropriate level of data encryption.

2396 3.12.1.2 On-Board Data Upload

2397 The *aircraft* shall transfer (upload) all required mission planning data and mission scenario data
2398 from a single DTD in four minutes or less.

2399 3.12.1.3 DTD Adapter

2400 The *aircraft system* shall provide an off-board DTD interface adapter to transfer mission
2401 planning data and mission scenario data onto the DTD as well as to transfer downloaded *aircraft*
2402 data to the mission debriefing system. (Note: The intent is to furnish the existing mission
2403 planning systems with a stand-alone DTD adapter device. For the new mission debriefing
2404 systems, the DTD adapter configuration can be a stand-alone device or be housed in the mission
2405 debriefing system itself.)

2406 3.12.2 Mission Planning Interface

2407 The *aircraft* mission planning interface shall be compatible with the Joint Mission Planning
2408 System (JMPS), APT Mission Planning Environment (MPE), and accept mission planning data
2409 from a JMPS-produced DTD. (Note: The APT MPE consists of the existing JMPS Framework
2410 and Common Components (CC), and a new APT Unique Planning Component (UPC) to be
2411 developed from the Contractor-developed interface control documentation (e.g., *aircraft*
2412 navigation database interface control document) IAW the SOW.)

2413 3.12.3 Mission Scenario Generation

2414 The *aircraft system* shall provide for instructor aircrew to create, modify, review, store, and
2415 transfer (to DTD) pre-planned mission scenarios for *Embedded Training* operations (see section
2416 3.6) using unclassified airborne and ground *constructive targets* per Table 3-39. The *aircraft*

2417 *system* shall provide for instructor aircrew to create, modify, review, store, and transfer (to DTD)
 2418 *Embedded Training Presentation Overlays* for use on the SAD.

2419 **Table 3-39, Constructive Targets**

Target Type	
EW/AEW/GCI (Surveillance radars)	Generic friendly
	Generic threat
	Generic neutral
SAMs & AAA (Acquisition, Track, Missile Guidance radars)	Generic friendly
	Generic AAA threat
	Generic threat medium range SAM (12 -25 NM)
	Generic threat short range SAM (2 – 8 NM)
	Generic neutral
Fighters (Targeting radar, Missile Launch indication)	Generic friendly
	Generic threat
	Generic neutral
Identification Friend or Foe	Generic friendly
	Generic threat
	Generic neutral
Range ground targets	<i>Constructive targets</i> that correspond to actual ground targets used in the ranges and low level routes within the <i>Local Training Areas</i> . (Note: The intent is to provide the capability to geo-position <i>constructive targets</i> that represent the real-world ground targets used in the range and low level routes, and to reposition the <i>constructive targets</i> when the real-world ground targets are relocated and without having to wait for a database update or updated imagery.)

2420 **3.12.4 Mission Debriefing**

2421 The *aircraft system* shall provide for aircrew to meld, replay, and review the mission audio,
 2422 video, and flight data for a single-ship mission, and for a multi-ship mission of up to eight
 2423 participating *aircraft* (*GBTS* is considered an aircraft for APT configurations if implementing
 2424 *GBTS* Connectivity).

2425 **3.12.4.1 Debriefing Operation**

2426 The *aircraft system* shall replay single-ship, time-synchronized audio, video, and flight data, as
 2427 defined below, to include switching through multiple displays for instruction:

- a. Internal and external communications
- b. Flight instruments
- c. *HTD* presentation (both aircrew positions if *HTD* is a helmet-mounted display)
- d. *LAD* presentation (both aircrew positions)

- e. Radar display presentation
- f. DMS/RWR display presentation and threat tones
- g. DMS/Expendables *situational awareness* indicators and audible cues
- h. Weapons *situational awareness* indicators and audio tones
- i. SAD presentation
- j. Tactical Datalink presentation
- k. Targeting Pod display presentation (if Targeting Pod is implemented)
- l. Throttle position

2428 **3.12.4.2 Multi-Ship Debriefing**

2429 The *aircraft system* shall simultaneously replay multi-ship, time-synchronized audio, video, and
 2430 flight data (melded presentation) to enable joint *mission debriefing* of up to eight participating
 2431 *aircraft* while providing each participating *aircraft* the functionality in 3.12.4.1.

2432 **3.12.4.3 Data Uploading**

2433 The *aircraft system* shall provide for uploading recorded data from four participating *aircraft* in
 2434 five minutes or less combined.

2435 **3.12.4.4 Data Melding**

2436 The *aircraft system* shall provide for melding recorded data from eight participating *aircraft* in
 2437 five minutes or less.

2438 **3.12.4.5 Two- and Three-Dimensional Perspective Views**

2439 The *aircraft system* shall provide three-dimensional mission replay from aircrew (cockpit)
 2440 perspective, off-aircraft perspective, and overhead “bird’s eye” view so that aircrew can review
 2441 flight path, maneuvers, and engagements in relation to own-ship and other participating *aircraft*.

2442 **3.12.4.6 Playback Controls**

2443 The *aircraft system* shall provide the following replay controls:

- a. Normal-speed play
- b. Slow-speed play
- c. Fast-speed play
- d. Pause/Freeze
- e. Stop
- f. Fast Reverse
- g. Fast-forward
- h. Fast-forward to an event (*bookmark*)
- i. Fast-forward to specific time
- j. Frame-by-frame playback (minimum 30 frames per second)
- k. Zoom in and out
- l. Pan through a re-creation of the training mission using planning and recorded data as well as imagery.

2444 **4 VERIFICATION**

2445 **4.0 General**

2446 Section 4 (Verification Provisions) contains the methodology for verifying the system's design,
2447 operation, and performance to meet all requirements established in Section 3 (System
2448 Requirements) herein.

2449 **4.0.1 Overview**

2450 **4.0.1.1 Philosophy of Verifications**

2451 The basis of any verification method is the root source that establishes the data used to support
2452 requirement compliance (e.g., if analysis of another program's flight test data is used, then the
2453 verification method is flight test). The intent of the development verification approach is to
2454 maximize the integration of development, airworthiness certification, and operational
2455 evaluations, in order to optimize costs, schedule, and performance. Previously accomplished
2456 verification methods may be used to satisfy the verification methods in this section if the data is
2457 relevant and approved by the Government. The Government reserves the right to deny the use of
2458 previously accomplished verification methods.

2459 **4.0.1.2 Location of Verifications**

2460 Prime contractor-, sub-contractor-, commercial-, and Government-owned facilities that are
2461 acceptable to the Government may be utilized for the application(s) intended.

2462 **4.0.1.3 Responsibility for Verifications**

2463 The prime contractor is responsible for planning, resourcing, performing, successful completion,
2464 and reporting for all requirement compliance verifications. The Government formal approval of
2465 verification documentation constitutes completion. The Government reserves the right to require
2466 additional verification effort within the confines of the required verification methods. The
2467 Government reserves the right to participate in or witness any of the requirement verifications.

2468 **4.0.1.4 Verification Cross Reference Matrix (VCRM)**

2469 The VCRM (Table 4-1) provides the cross reference between each Section 3 requirement, the
2470 associated minimum required verification methods (defined below), and the associated
2471 verification paragraph numbers.

2472 **4.0.2 Verification Methods**

2473 The verification methods are defined below. The methods are independent, but are sometimes
2474 used as formal complements to other verification methods, to support substantiation or for
2475 completeness. The methods can also be used in combination with other verification methods to
2476 convert already available data to verification compatible data.

2477 4.0.2.1 Not Applicable (N)

2478 This verification method is usually reserved for Section 3 requirement headers or title paragraphs
2479 which do not contain requirements.

2480 4.0.2.2 Inspection (I)

2481 This verification method consists of actual component, system, function, installation non-
2482 destructive examination (without special or complex equipment) by sensory means, simple
2483 physical manipulation, and simple measurement; including review of authenticated
2484 documentation.

2485 4.0.2.3 Analysis (A)

2486 This verification method consists of an evaluation of components or systems interacting with
2487 their intended environment, using technical calculations or mathematical modeling based on
2488 physical laws and empirical data. Analysis can include design margins. Sensitivity, similarity,
2489 and failure effects analyses are forms of this method. Analysis associated with refining test data
2490 is not a part of this method.

2491 4.0.2.4 Demonstration (Demo)

2492 This verification method consists of a non-instrumented operation of the actual component or
2493 system under specified controlled conditions on the aircraft or in an equivalent environment,
2494 where functional success is determined on a qualitative or pass-fail basis. This can be on the
2495 ground or in-flight.

2496 4.0.2.4.1 Ground Demonstration (g)

2497 This verification sub-method consists of a demonstration on ground.

2498 4.0.2.4.2 Flight Demonstration (t)

2499 This verification sub-method consists of a demonstration in-flight.

2500 4.0.2.5 Test

2501 This general group of sub-methods consists of quantitative measuring of the characteristics or
2502 performance of actual components or systems in controlled intended conditions (real or
2503 representative). These sub-methods include analysis of the resulting data. Sub-methods are as
2504 follows:

2505 4.0.2.5.1 Laboratory Test (L)

2506 This verification sub-method consists of testing in an off-aircraft ground-based facility with a
2507 physical simulation of the operating environment.

2508 4.0.2.5.2 Ground Test (G)

2509 This verification sub-method consists of on-aircraft testing under static ground conditions.

2510 **4.0.2.5.3 Flight Test (F)**

2511 This verification sub-method consists of on-aircraft testing under dynamic ground, transition-to-
2512 flight, and flight envelope conditions.

2513 **Table 4-1, Verification Cross Reference Matrix (VCRM)**

Legend:										
N - Not applicable		I - Inspection	g - Ground demonstration		L - Laboratory test					
		A - Analysis	f - Flight demonstration		G - Ground test					
					F - Flight test					
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.1	4.1	Performance and Structural Characteristics	X							
3.1.1	4.1.1	Performance Ground Rules	X							
3.1.2	4.1.2	Performance	X							
3.1.2.1	4.1.2.1	High G Maneuvering			X				X	X
3.1.2.2	4.1.2.2	Instantaneous G-onset Rate			X				X	X
3.1.2.2.1	4.1.2.2.1	Average G-onset Rate			X				X	X
3.1.2.3	4.1.2.3	Negative and Zero G Flight	X							
3.1.2.3.1	4.1.2.3.1	Negative G Flight			X	X		X		X
3.1.2.3.2	4.1.2.3.2	Zero G Flight			X	X		X		X
3.1.2.4	4.1.2.4	Instantaneous Turn Rate			X				X	X
3.1.2.5	4.1.2.5	Sustained Turn Rate			X				X	X
3.1.2.6	4.1.2.6	High Angle-of-Attack (AOA) Maneuvering			X				X	X
3.1.2.7	4.1.2.7	Flight Endurance			X				X	X
3.1.2.8	4.1.2.8	Takeoff Distance			X				X	X
3.1.2.9	4.1.2.9	Landing Distance			X				X	X
3.1.2.10	4.1.2.10	Takeoff and Landing in Crosswinds	X							
3.1.2.10.1	4.1.2.10.1	Lateral-Directional Control in Crosswinds			X					X
3.1.2.10.2	4.1.2.10.2	Takeoff Run and Landing Rollout in Crosswinds			X					X
3.1.2.11	4.1.2.11	Takeoff Climb Gradient Performance			X				X	X
3.1.2.12	4.1.2.12	General Handling Characteristics (including all store loadout configurations)	X							
3.1.2.12.1	4.1.2.12.1	Aircraft Flying Qualities			X				X	X
3.1.2.12.2	4.1.2.12.2	Flying Qualities in Atmospheric Disturbances			X				X	X
3.1.2.12.3	4.1.2.12.3	Student Skill Level Handling Characteristics			X				X	X
3.1.2.12.4	4.1.2.12.4	Student Fault Tolerant Flight Characteristics			X				X	X
3.1.2.12.5	4.1.2.12.5	Control Margin			X					X
3.1.2.12.6	4.1.2.12.6	Safe Termination			X					X
3.1.2.12.7	4.1.2.12.7	Warning and Indication of Approach to Dangerous Flight Conditions			X					X
3.1.2.12.8	4.1.2.12.8	Departure Resistance			X					X
3.1.2.12.8.1	4.1.2.12.8.1	Recovery from Post-Stall Gyration and Spins			X					X
3.1.2.12.9	4.1.2.12.9	Stalls	X							
3.1.2.12.9.1	4.1.2.12.9.1	Approach to Stall								X
3.1.2.12.9.2	4.1.2.12.9.2	Tactile/Physical Cues for Stall Warning								X
3.1.2.12.9.3	4.1.2.12.9.3	Aural and Visual Stall Warning	X							
3.1.2.12.9.3.1	4.1.2.12.9.3.1	Aural and Visual Cues for Stall Warning			X					X
3.1.2.12.9.3.2	4.1.2.12.9.3.2	Aural and Visual Stall Warning Duration			X					X
3.1.2.12.9.3.3	4.1.2.12.9.3.3	Aural and Visual Stall Warning Conditions			X					X
3.1.2.12.9.4	4.1.2.12.9.4	Stall Recovery								X
3.1.2.12.10	4.1.2.12.10	Buffet								X
3.1.2.12.11	4.1.2.12.11	Pilot-in-the-loop Oscillations (PIO)			X					X
3.1.2.12.12	4.1.2.12.12	Failures			X				X	X
3.1.2.13	4.1.2.13	Flight Control System (including all store loadout configurations)	X							
3.1.2.13.1	4.1.2.13.1	Augmentation Systems	X							
3.1.2.13.1.1	4.1.2.13.1.1	Augmentation System Operation			X	X				X
3.1.2.13.1.2	4.1.2.13.1.2	Augmentation System Performance Degradation			X	X				X
3.1.2.13.1.3	4.1.2.13.1.3	Flight Control System Operation			X				X	X
3.1.2.13.2	4.1.2.13.2	Control Surface Displacement Rates			X					X

UNCLASSIFIED

Legend:										
N - Not applicable		I - Inspection		g - Ground demonstration		L - Laboratory test				
A - Analysis		f - Flight demonstration		G - Ground test			F - Flight test			
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.1.2.13.3	4.1.2.13.3	Cockpit Controller Characteristics			X					X
3.1.2.13.3.1	4.1.2.13.3.1	Cross-Coupling			X					X
3.1.2.13.4	4.1.2.13.4	Control Centering			X					X
3.1.2.13.5	4.1.2.13.5	Control Free Play			X					X
3.1.2.13.6	4.1.2.13.6	Control Linearity								X
3.1.2.14	4.1.2.14	Over-G Condition (including all store loadout configurations)	X							
3.1.2.14.1	4.1.2.14.1	Warnings of Approaching G Limit			X					X
3.1.2.14.2	4.1.2.14.2	G-limiter			X					X
3.1.2.14.3	4.1.2.14.3	Over-G Feedback		X	X					
3.1.3	4.1.3	Structures	X							
3.1.3.1	4.1.3.1	Design Service Life			X				X	X
3.1.3.2	4.1.3.2	Materials, Processes, and Parts		X						
3.1.3.3	4.1.3.3	Fasteners		X						
3.1.3.4	4.1.3.4	Corrosion Prevention and Control		X				X		
3.1.3.4.1	4.1.3.4.1	Paint Scheme		X						
3.1.3.5	4.1.3.5	General Parameters and Conditions	X							
3.1.3.5.1	4.1.3.5.1	Airframe Configurations		X						
3.1.3.5.2	4.1.3.5.2	Equipment and Stores			X			X	X	X
3.1.3.5.3	4.1.3.5.3	Speeds								X
3.1.3.5.4	4.1.3.5.4	Altitudes			X					X
3.1.3.5.5	4.1.3.5.5	Limit Loads			X			X		X
3.1.3.5.6	4.1.3.5.6	Ultimate Loads			X			X	X	
3.1.3.6	4.1.3.6	Structural Loads	X							
3.1.3.6.1	4.1.3.6.1	Flight Loads			X				X	X
3.1.3.6.1.1	4.1.3.6.1.1	Symmetric Maneuver Load Factors								X
3.1.3.6.1.2	4.1.3.6.1.2	Asymmetric Maneuver Load Factors								X
3.1.3.6.1.3	4.1.3.6.1.3	Pressurization							X	
3.1.3.6.1.4	4.1.3.6.1.4	Discrete Gust Loads		X						
3.1.3.6.1.4.1	4.1.3.6.1.4.1	Discrete Gust Formulas		X						
3.1.3.6.2	4.1.3.6.2	Ground Loads			X				X	
3.1.3.6.2.1	4.1.3.6.2.1	Landing Sink Speeds			X				X	
3.1.3.6.2.2	4.1.3.6.2.2	Ground Wind Loads	X							
3.1.3.6.2.2.1	4.1.3.6.2.2.1	Mooring		X	X					
3.1.3.6.2.2.2	4.1.3.6.2.2.2	Doors, Canopy, and Windshield			X	X				
3.1.3.6.2.2.3	4.1.3.6.2.2.3	Crosswinds Loads			X					
3.1.3.6.3	4.1.3.6.3	Repeated Loads			X					
3.1.3.6.3.1	4.1.3.6.3.1	Maneuvers			X					
3.1.3.6.3.2	4.1.3.6.3.2	Gusts			X					
3.1.3.6.3.3	4.1.3.6.3.3	Landings			X					
3.1.3.6.3.4	4.1.3.6.3.4	Other Ground Loads			X					
3.1.3.6.3.5	4.1.3.6.3.5	Pressurization			X					
3.1.3.6.3.6	4.1.3.6.3.6	Repeated Operation of Movable Structures			X					
3.1.3.7	4.1.3.7	Bird Strike/Hail Impact	X							
3.1.3.7.1	4.1.3.7.1	Transparency System Bird Strike Capability						X		
3.1.3.7.2	4.1.3.7.2	Airframe and Engine Inlet Bird Strike Capability						X		
3.1.3.7.3	4.1.3.7.3	Hail Impact Protection						X		
3.1.3.8	4.1.3.8	Vibroacoustics			X			X	X	X
3.1.3.8.1	4.1.3.8.1	Aeroacoustics			X			X	X	X
3.1.3.8.2	4.1.3.8.2	Vibration			X				X	
3.1.3.8.3	4.1.3.8.3	Aeroelastic Stability (Flutter and Divergence)			X			X	X	X
3.2	4.2	Avionics	X							
3.2.1	4.2.1	Communications	X							
3.2.1.1	4.2.1.1	Multi-Band Radios		X						
3.2.1.2	4.2.1.2	Ultra High Frequency (UHF) Communication					X			
3.2.1.3	4.2.1.3	Very High Frequency (VHF) Communication					X			
3.2.1.4	4.2.1.4	Simultaneous UHF and VHF Communication					X			

Legend:										
N - Not applicable		I - Inspection		g - Ground demonstration		L - Laboratory test				
A - Analysis		f - Flight demonstration				G - Ground test				
						F - Flight test				
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.2.1.5	4.2.1.5	Communication System Setup				X				
3.2.1.6	4.2.1.6	Emergency Locator Transmitter (ELT)				X				
3.2.2	4.2.2	Navigation	X							
3.2.2.1	4.2.2.1	Reduced Vertical Separation Minimum (RVSM)								X
3.2.2.2	4.2.2.2	Global Positioning System (GPS)						X		
3.2.2.3	4.2.2.3	RNP/RNAV Navigation								X
3.2.2.4	4.2.2.4	Tactical Air Navigation (TACAN)								X
3.2.2.5	4.2.2.5	Air-to-Air TACAN								X
3.2.2.6	4.2.2.6	VHF Omni-Directional Range (VOR)/Distance Measuring Equipment (DME)								X
3.2.2.7	4.2.2.7	Instrument Landing System (ILS)								X
3.2.3	4.2.3	Surveillance	X							
3.2.3.1	4.2.3.1	Traffic Alert and Collision Avoidance System (TCAS)								X
3.2.3.2	4.2.3.2	Automatic Dependent Surveillance-Broadcast (ADS-B) Out						X		X
3.2.3.3	4.2.3.3	ADS-B In								X
3.2.3.4	4.2.3.4	Transponder						X		X
3.2.3.5	4.2.3.5	Terrain Warning and Avoidance								X
3.2.4	4.2.4	Datalink and Network Connectivity	X							
3.2.4.1	4.2.4.1	Embedded Training Datalink	X							
3.2.4.2	4.2.4.2	Connectivity Region (Local Flying Area)					X			
3.2.4.3	4.2.4.3	Maximum Simultaneous Load			X					X
3.2.4.4	4.2.4.4	Multiple Concurrent Missions					X			
3.2.4.5	4.2.4.5	Ground Based Training Systems (GBTS) Connectivity			X		X			
3.2.4.5.1	4.2.4.5.1	GBTS Voice Communication					X			
3.2.4.6	4.2.4.6	Ground Support Station (GSS) Connectivity			X		X			
3.2.4.6.1	4.2.4.6.1	GSS Voice Communication					X			
3.2.4.6.2	4.2.4.6.2	GSS Live Monitoring					X			
3.3	4.3	Propulsion System	X							
3.3.1	4.3.1	Fuel Consumption			X			X		
3.3.2	4.3.2	Engine Starts			X			X	X	X
3.3.2.1	4.3.2.1	Environmental Conditions for Engine Starts			X			X	X	X
3.3.2.2	4.3.2.2	Fuel and Oils for Engine Starts			X			X	X	X
3.3.2.3	4.3.2.3	Thrust Demand at Start			X			X	X	X
3.3.2.4	4.3.2.4	Engine Ground Starts	X							
3.3.2.4.1	4.3.2.4.1	Ground Start Cycles			X	X				
3.3.2.4.2	4.3.2.4.2	Altitude Range for Ground Starts			X	X				
3.3.2.4.3	4.3.2.4.3	Wind Speed for Ground Starts			X	X				
3.3.2.4.4	4.3.2.4.4	Hot Temperature Soak Start			X	X				
3.3.2.4.5	4.3.2.4.5	Cold Temperature Soak Start			X	X				
3.3.2.5	4.3.2.5	Engine Air Starts			X			X		X
3.3.3	4.3.3	Automatic Relight			X			X		X
3.3.4	4.3.4	Shutdown	X							
3.3.4.1	4.3.4.1	Fuel Flow Termination			X			X	X	X
3.3.4.2	4.3.4.2	Power Setting at Shutdown			X			X	X	X
3.3.5	4.3.5	Stall-Free Operation			X			X	X	X
3.3.6	4.3.6	Thrust Control			X			X	X	X
3.3.7	4.3.7	Thrust Transients			X			X	X	X
3.3.8	4.3.8	Thrust Stability, Droop and Overshoot			X			X	X	X
3.3.9	4.3.9	Thrust Demand and Retention			X			X	X	X
3.3.10	4.3.10	Engine Fire/Overheat Indication			X			X	X	
3.3.11	4.3.11	Engine Design Service Life		X	X				X	
3.3.11.1	4.3.11.1	Hot Parts Design Service Life			X				X	
3.3.11.2	4.3.11.2	Cold Parts Design Service Life			X				X	
3.3.12	4.3.12	Atmospheric Liquid Water Ingestion		X	X			X		
3.3.13	4.3.13	Bird Ingestion		X	X			X		

UNCLASSIFIED

Legend:										
N - Not applicable		I - Inspection		g - Ground demonstration		L - Laboratory test				
A - Analysis		f - Flight demonstration		G - Ground test			F - Flight test			
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.3.14	4.3.14	Distortion Intensity Levels			X					X
3.3.15	4.3.15	Damage Tolerance			X			X		
3.3.16	4.3.16	Ice Ingestion		X	X			X		
3.3.17	4.3.17	Sand and Dust Ingestion		X	X			X		
3.4	4.4	Vehicle Subsystems	X							
3.4.1	4.4.1	Fuel Subsystem	X							
3.4.1.1	4.4.1.1	Pressure Refuel and Defuel				X				
3.4.1.2	4.4.1.2	Gravity Refuel and Defuel				X				
3.4.1.3	4.4.1.3	Fuel Transfer			X				X	X
3.4.2	4.4.2	Aerial Refueling Subsystem Growth Path (Receiver)			X					X
3.4.2.1	4.4.2.1	Aerial Refueling Subsystem Full Integration (Receiver)		X	X				X	X
3.4.3	4.4.3	Environmental Control Subsystem (ECS)		X	X				X	X
3.4.3.1	4.4.3.1	Heating Performance (Cold Soak)							X	
3.4.3.2	4.4.3.2	Cooling Performance (Hot Soak)							X	
3.4.3.3	4.4.3.3	Temperature Range								X
3.4.3.4	4.4.3.4	Temperature Variation							X	X
3.4.3.5	4.4.3.5	ECS Controls		X					X	X
3.4.3.6	4.4.3.6	ECS Alerts			X				X	X
3.4.3.7	4.4.3.7	Anti -Fog -Frost & -Ice							X	X
3.4.3.8	4.4.3.8	Equipment Cooling			X				X	X
3.4.3.9	4.4.3.9	Alternate Cooling			X				X	X
3.4.3.10	4.4.3.10	Cockpit Pressurization			X				X	X
3.4.3.11	4.4.3.11	Air Contamination		X	X	X	X			
3.4.3.12	4.4.3.12	Bleed Air Ducting (if utilized)		X					X	X
3.4.3.13	4.4.3.13	Moisture Control		X					X	X
3.4.4	4.4.4	Braking		X					X	
3.4.4.1	4.4.4.1	Parking Brake		X	X					
3.4.5	4.4.5	Electrical Power Subsystem		X	X			X	X	X
3.4.5.1	4.4.5.1	Power Source Switching		X		X				
3.4.5.2	4.4.5.2	External Power Compatibility		X		X				
3.4.5.3	4.4.5.3	External Power Receptacle		X		X				
3.4.5.4	4.4.5.4	Emergency Power			X	X		X		
3.4.5.5	4.4.5.5	Aircraft Start-Up		X		X				
3.4.5.5.1	4.4.5.5.1	External Electrical Power				X				
3.4.5.6	4.4.5.6	Electrical Wiring Interconnection		X						
3.4.6	4.4.6	Hydraulic Subsystem (if utilized)			X			X	X	X
3.4.6.1	4.4.6.1	Hydraulic System Redundancy			X			X	X	X
3.4.6.2	4.4.6.2	Hydraulic System Integrity		X	X			X		
3.5	4.5	Crew Systems	X							
3.5.1	4.5.1	Human Performance and Human Engineering		X	X	X	X	X	X	X
3.5.2	4.5.2	Cockpit Configuration		X			X			
3.5.2.1	4.5.2.1	Cockpit Commonality		X		X				
3.5.3	4.5.3	Cockpit Stowage		X		X				
3.5.4	4.5.4	Safety Devices and Streamers		X						
3.5.5	4.5.5	Aircrew Physical Anthropometrics							X	
3.5.6	4.5.6	Anthropometric Accommodation							X	X
3.5.7	4.5.7	Cockpit Reach							X	
3.5.8	4.5.8	Aircrew Workload							X	X
3.5.9	4.5.9	Aircrew Alerting		X	X			X		
3.5.9.1	4.5.9.1	Prioritization of Alerts		X	X			X		
3.5.9.2	4.5.9.2	Master Warning/Master Caution		X						
3.5.9.3	4.5.9.3	Aural and Visual Alerts		X				X		
3.5.9.4	4.5.9.4	Aural Signals for Warning Alerts		X				X		
3.5.10	4.5.10	Intercommunications Control System (ICS)	X							
3.5.10.1	4.5.10.1	External Communication		X		X	X			
3.5.10.2	4.5.10.2	Aircrew Communication		X		X	X			

Legend:										
N - Not applicable		I - Inspection		g - Ground demonstration		L - Laboratory test				
A - Analysis		f - Flight demonstration		G - Ground test				F - Flight test		
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.5.10.3	4.5.10.3	Ground Communication		X		X				
3.5.10.4	4.5.10.4	Radio Attenuation		X		X	X			
3.5.10.5	4.5.10.5	ICS Stations		X		X	X			
3.5.10.6	4.5.10.6	ICS Controls		X		X				
3.5.10.7	4.5.10.7	Microphone Operations		X		X	X			
3.5.10.8	4.5.10.8	Aircrew and Ground Personnel Acoustic (Speech) Intelligibility							X	X
3.5.11	4.5.11	Cockpit Controls	X							
3.5.11.1	4.5.11.1	Throttle Detent		X		X	X			
3.5.11.1.1	4.5.11.1.1	Afterburning Aircraft		X		X	X			
3.5.11.1.2	4.5.11.1.2	Non-afterburning Aircraft		X		X	X			
3.5.11.2	4.5.11.2	Side-Arm (Side Stick) Control Stick Forearm Support		X		X				
3.5.11.3	4.5.11.3	Rudder Control Forces			X					X
3.5.11.4	4.5.11.4	Landing Gear Control		X			X			
3.5.11.5	4.5.11.5	Emergency Controls	X							
3.5.11.5.1	4.5.11.5.1	Accessibility		X		X				
3.5.11.5.2	4.5.11.5.2	Inadvertent Actuation		X	X	X				
3.5.11.5.3	4.5.11.5.3	Markings		X						
3.5.12	4.5.12	Interior Finishes, Components and Equipment	X							
3.5.12.1	4.5.12.1	Dimensional Stability			X					
3.5.12.2	4.5.12.2	Fire Resistance						X		
3.5.13	4.5.13	Thermal Contact Hazards							X	
3.5.14	4.5.14	Cockpit Displays	X							
3.5.14.1	4.5.14.1	Large Area Display (LAD)		X		X	X			
3.5.14.1.1	4.5.14.1.1	Viewable Area		X						
3.5.14.1.2	4.5.14.1.2	Configurable Display				X	X			
3.5.14.1.3	4.5.14.1.3	Repeater Mode				X	X			
3.5.14.1.4	4.5.14.1.4	Rear-Cockpit Interface		X	X	X	X			
3.5.14.1.5	4.5.14.1.5	Integrated Digital Checklists and Electronic Flight Information				X	X			
3.5.14.1.6	4.5.14.1.6	Situational Awareness Display (SAD)/Navigation Display Presentation				X	X			
3.5.14.2	4.5.14.2	Glove Compatibility				X				
3.5.14.3	4.5.14.3	Display Readability				X				
3.5.14.4	4.5.14.4	Cockpit Display Luminance				X	X			
3.5.14.5	4.5.14.5	Display Quality and Latency				X	X			
3.5.14.6	4.5.14.6	Head-up Type Display (HTD)		X						
3.5.14.7	4.5.14.7	Primary Flight Reference		X						
3.5.14.8	4.5.14.8	Standby Flight Instrument		X						
3.5.14.9	4.5.14.9	Aircraft Clock		X						
3.5.14.9.1	4.5.14.9.1	Stopwatch		X						
3.5.14.10	4.5.14.10	Symbology		X						
3.5.15	4.5.15	Interior Lighting				X				
3.5.15.1	4.5.15.1	Night Vision Imaging System (NVIS) Compatibility			X				X	
3.5.15.2	4.5.15.2	Lighting Uniformity						X	X	
3.5.15.3	4.5.15.3	Brightness Control			X	X	X			
3.5.15.4	4.5.15.4	Glare and Reflections			X	X	X			
3.5.15.5	4.5.15.5	Utility/Map light		X						
3.5.16	4.5.16	Exterior Lighting		X		X	X			
3.5.16.1	4.5.16.1	FAA Interoperability		X	X	X	X			
3.5.17	4.5.17	Interior and Exterior Visibility	X							
3.5.17.1	4.5.17.1	Interior Visibility		X		X	X			
3.5.17.2	4.5.17.2	Exterior Visibility		X	X	X	X			
3.5.17.2.1	4.5.17.2.1	Visibility for Landings		X	X		X			
3.5.18	4.5.18	Aircraft Transparency/Canopy System				X	X			
3.5.18.1	4.5.18.1	Transparency Integration with Environmental Conditions			X	X	X			
3.5.18.2	4.5.18.2	Transparency Shape Compatibility				X				

UNCLASSIFIED

Legend:										
N - Not applicable		I - Inspection		g - Ground demonstration		L - Laboratory test				
A - Analysis		f - Flight demonstration		G - Ground test			F - Flight test			
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.5.18.3	4.5.18.3	Transparency System Thermal Loads			X					
3.5.18.4	4.5.18.4	Canopy Opening Clearance				X				
3.5.18.5	4.5.18.5	Canopy Actuation (Normal Ingress/Egress)		X						
3.5.18.6	4.5.18.6	Manual Canopy Operation		X						
3.5.18.7	4.5.18.7	Canopy Latching and Locking		X	X	X				
3.5.18.7.1	4.5.18.7.1	Canopy Open Lock		X		X				
3.5.19	4.5.19	Normal Aircraft Entry and Exit		X		X				
3.5.19.1.1	4.5.19.1.1	Transparency – Escape System Compatibility		X	X	X		X		
3.5.20	4.5.20	Escape and Egress System		X						
3.5.20.1	4.5.20.1	Escape System Reliability			X	X		X		
3.5.20.2	4.5.20.2	Manual Emergency Ground Egress				X				
3.5.20.2.1	4.5.20.2.1	Backup Emergency Ground Egress		X	X				X	
3.5.20.3	4.5.20.3	Escape Path Clearance System		X	X				X	
3.5.20.3.1	4.5.20.3.1	Penetrating Injuries							X	
3.5.20.3.2	4.5.20.3.2	Impulse Noise							X	
3.5.20.3.3	4.5.20.3.3	Thermal Energy Exposure Limits						X		
3.5.20.3.4	4.5.20.3.4	Escape Path Clearance Considerations		X	X	X		X		
3.5.20.4	4.5.20.4	External Controls		X		X				
3.5.20.5	4.5.20.5	Ejection Seat Clearance						X		
3.5.20.6	4.5.20.6	Safing of Emergency Controls		X	X	X				
3.5.20.6.1	4.5.20.6.1	Secondary Seat Safety Device		X	X	X				
3.5.20.7	4.5.20.7	Manually Initiated Automatic Escape		X	X				X	
3.5.20.7.1	4.5.20.7.1	Escape Envelope			X			X		
3.5.20.7.2	4.5.20.7.2	Canopy and Escape Path Clearance		X	X			X		
3.5.20.7.2.1	4.5.20.7.2.1	Ejection through the Canopy (For Transparency Fracturing Systems in Primary Mode, and Direct Penetration Backup Modes)				X		X		
3.5.20.7.3	4.5.20.7.3	Aircraft Clearance			X			X		
3.5.20.7.4	4.5.20.7.4	Initiation			X	X			X	
3.5.20.7.5	4.5.20.7.5	Inter-Seat Sequencing			X			X		
3.5.20.7.5.1	4.5.20.7.5.1	Inter-Seat Sequencing Mode Selection (for tandem cockpit configured aircraft)		X				X		
3.5.20.7.5.2	4.5.20.7.5.2	Divergence						X		
3.5.20.7.6	4.5.20.7.6	Seat Aircrew Separation						X		
3.5.20.7.7	4.5.20.7.7	Descent Recovery Parachute System		X				X		
3.5.20.7.7.1	4.5.20.7.7.1	Recovery Parachute Deployment/Inflation Phase Accelerations						X		
3.5.20.7.7.2	4.5.20.7.7.2	Descent Rate – Steady State Phase						X		X
3.5.20.8	4.5.20.8	Personnel Restraint System		X			X	X		
3.5.20.8.1	4.5.20.8.1	Limb Restraint System		X		X		X		
3.5.20.8.2	4.5.20.8.2	Inertia Reel Lock		X		X			X	X
3.5.20.9	4.5.20.9	Energetic Materials and Components						X		
3.5.20.9.1	4.5.20.9.1	Firing Mechanism						X		
3.5.20.10	4.5.20.10	Acceleration Limits	X							
3.5.20.10.1	4.5.20.10.1	Acceleration Limits – Catapult Phase						X		
3.5.20.10.2	4.5.20.10.2	Acceleration Limits –Free Flight and Drogue Phase						X		
3.5.20.11	4.5.20.11	Head Injury – All Phases						X		
3.5.20.12	4.5.20.12	Neck Loads – All Phases	X							
3.5.20.12.1	4.5.20.12.1	Neck Loads – Speeds up to and including 450 KEAS						X		
3.5.20.12.2	4.5.20.12.2	Neck Loads – Speeds greater than 450 KEAS						X		
3.5.20.13	4.5.20.13	Environmental Conditions			X			X	X	
3.5.20.14	4.5.20.14	Center of Gravity (CG) Envelope			X				X	
3.5.20.15	4.5.20.15	Stabilization and Deceleration						X		
3.5.20.16	4.5.20.16	Seat Assembly						X		
3.5.20.16.1	4.5.20.16.1	Headrest						X		
3.5.20.16.2	4.5.20.16.2	Canopy Breakers		X				X		
3.5.20.16.3	4.5.20.16.3	Cushions		X						
3.5.20.17	4.5.20.17	Proof Loads						X		

Legend:										
N - Not applicable		I - Inspection		g - Ground demonstration		L - Laboratory test				
A - Analysis		f - Flight demonstration		G - Ground test			F - Flight test			
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.5.20.18	4.5.20.18	Crash Ultimate Loads		X				X		
3.5.20.19	4.5.20.19	Redundancy		X				X		
3.5.20.20	4.5.20.20	Safety		X	X	X	X			
3.5.20.21	4.5.20.21	Explosive Device Maintainability			X					
3.5.20.22	4.5.20.22	Performance Reliability			X			X		
3.5.20.23	4.5.20.23	Component Life and Change-outs			X					
3.5.20.24	4.5.20.24	Cartridge Actuated Devices/Propellant Actuated Devices			X					
3.5.20.25	4.5.20.25	Aircraft Integration		X		X	X	X		
3.5.20.26	4.5.20.26	Escape System Installation and Removal				X				
3.5.20.27	4.5.20.27	Specialized Tooling or Machinery		X	X	X				
3.5.21	4.5.21	Aircrew Flight Equipment and Pilot Personal Protection	X							
3.5.21.1	4.5.21.1	Personal Flight Equipment Compatibility		X		X	X			
3.5.21.2	4.5.21.2	Anti-G Trousers Pressurized Air Supply					X	X		X
3.5.21.3	4.5.21.3	Survival Kit Provisions		X			X			
3.5.21.4	4.5.21.4	Personnel Emergency Location Transmitter				X				
3.5.21.5	4.5.21.5	Aircrew Acoustic Exposure Tolerance							X	X
3.5.22	4.5.22	Oxygen System			X			X	X	X
3.5.22.1	4.5.22.1	Oxygen Supply Quality			X			X	X	X
3.5.22.1.1	4.5.22.1.1	Oxygen Mask Pressures			X			X	X	X
3.5.22.2	4.5.22.2	Oxygen Quantity		X	X					X
3.5.22.3	4.5.22.3	Uninterrupted Oxygen Supply			X			X	X	X
3.5.22.3.1	4.5.22.3.1	OBOGS Pressure Sensors		X				X	X	X
3.5.22.4	4.5.22.4	Emergency Oxygen			X			X	X	X
3.5.22.5	4.5.22.5	Breathing Regulator			X		X			
3.5.22.6	4.5.22.6	Oxygen System Controls and Displays		X		X				
3.5.22.7	4.5.22.7	Oxygen System Integration		X	X	X	X	X	X	X
3.5.22.8	4.5.22.8	Pressure Breathing for G (PBG) Loading		X				X		X
3.5.22.9	4.5.22.9	Breathing Gas Contamination Limits		X	X					
3.5.22.10	4.5.22.10	OBOGS Monitoring				X		X	X	
3.5.23	4.5.23	Ground Personnel/Maintainer Specific Considerations	X							
3.5.23.1	4.5.23.1	Ground Personnel Acoustic Exposure Tolerance							X	
3.5.23.2	4.5.23.2	Maintainer Lifting and Carrying Limits			X					
3.6	4.6	Embedded Training				X	X			
3.6.1	4.6.1	Radar System Simulation	X							
3.6.1.1	4.6.1.1	Radar Functions and Modes				X	X			
3.6.1.2	4.6.1.2	Air-to-Ground Function				X	X			
3.6.1.3	4.6.1.3	Air-to-Air Function				X	X			
3.6.1.4	4.6.1.4	Synthetic Aperture Radar (SAR) Ground Mapping				X	X			
3.6.1.5	4.6.1.5	Target Information				X	X			
3.6.1.6	4.6.1.6	Radar Detection				X	X			
3.6.1.6.1	4.6.1.6.1	Variable Tactical Environment				X	X			
3.6.1.7	4.6.1.7	Radar Controls				X	X			
3.6.1.8	4.6.1.8	Hands on Throttle and Stick (HOTAS)				X	X			
3.6.2	4.6.2	Defensive Management System (DMS)	X							
3.6.2.1	4.6.2.1	RWR Detection				X	X			
3.6.2.2	4.6.2.2	Threat Display				X	X			
3.6.2.3	4.6.2.3	DMS Controls				X	X			
3.6.2.4	4.6.2.4	Threat Audio				X	X			
3.6.2.5	4.6.2.5	Expendables Systems				X	X			
3.6.3	4.6.3	Weapon Systems				X	X			
3.6.3.1	4.6.3.1	No Drop Weapon Scoring (NDWS)				X	X			
3.6.4	4.6.4	Embedded Training Presentation Overlays on SAD				X	X			
3.6.5	4.6.5	Tactical Datalink (TDL) System Simulation				X	X			
3.6.6	4.6.6	Targeting Pod System Simulation				X	X			
3.6.7	4.6.7	Mission Scenario Inputs				X	X			

Legend:										
N - Not applicable		I - Inspection		g - Ground demonstration		L - Laboratory test				
		A - Analysis		f - Flight demonstration		G - Ground test				
						F - Flight test				
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.6.8	4.6.8	Synchronized Combat Environment				X	X			
3.6.8.1	4.6.8.1	Own-ship Position				X	X			
3.6.9	4.6.9	Geographical Area				X				
3.6.9.1	4.6.9.1	High Resolution Area				X				
3.6.10	4.6.10	Declutter Function				X	X			
3.7	4.7	Recorded Aircraft Information		X						
3.7.1	4.7.1	Military Flight Operations Quality Assurance (MFOQA)	X							
3.7.1.1	4.7.1.1	Recorded Data				X				
3.7.1.1.1	4.7.1.1.1	Airframe Tracking				X				
3.7.1.2	4.7.1.2	Data Retrieval				X				
3.7.2	4.7.2	Mishap Investigation Data	X							
3.7.2.1	4.7.2.1	Aircraft Recorded Data				X				
3.7.2.1.1	4.7.2.1.1	Crash Survivable Recorder(s)		X		X				
3.7.2.2	4.7.2.2	Data Retrieval				X				
3.7.2.3	4.7.2.3	Ejection Seat Recorded Data				X				
3.7.3	4.7.3	Maintenance Data	X							
3.7.3.1	4.7.3.1	Recorded Data				X				
3.7.3.1.1	4.7.3.1.1	CBM+ Function			X				X	
3.7.3.2	4.7.3.2	Aircraft Turn Data Viewing				X				
3.7.3.3	4.7.3.3	End of Fly Day Data Retrieval				X				
3.7.3.4	4.7.3.4	Maintenance Data Collection & Management System				X				
3.7.4	4.7.4	Mission Debrief Data	X							
3.7.4.1	4.7.4.1	Recorded Data				X				
3.7.4.1.1	4.7.4.1.1	Bookmarks				X				
3.7.4.2	4.7.4.2	Data Retrieval				X				
3.7.4.3	4.7.4.3	Data Quality				X				
3.8	4.8	Product Support	X							
3.8.1	4.8.1	Operational Availability (Ao)			X			X	X	X
3.8.2	4.8.2	Materiel Availability (Am)			X			X	X	X
3.8.3	4.8.3	Materiel Reliability (Rm)			X			X	X	X
3.8.4	4.8.4	Mean Time Between Failures (MTBF)			X			X	X	X
3.8.5	4.8.5	Fix Rate			X			X	X	X
3.8.6	4.8.6	Mean Time Between Maintenance (MTBM)			X			X	X	X
3.8.7	4.8.7	Mean Time To Repair (MTTR)			X			X	X	X
3.8.8	4.8.8	Turn-Around Time				X				
3.8.9	4.8.9	Diagnostics	X							
3.8.9.1	4.8.9.1	Integrated Diagnostics (ID) Percent Fault Detection (PFD) (Critical Faults)			X	X				
3.8.9.2	4.8.9.2	ID PFD (All Faults)			X	X				
3.8.9.3	4.8.9.3	ID Percent Fault Isolation (PFI) (Critical Faults)			X					
3.8.9.4	4.8.9.4	ID PFI (All Faults)			X					
3.8.9.5	4.8.9.5	Built-In-Test (BIT) Functions						X		
3.8.9.5.1	4.8.9.5.1	BIT Functions Display						X		
3.8.9.6	4.8.9.6	Safety Critical BIT Coverage			X			X		
3.8.9.6.1	4.8.9.6.1	BIT PFD (Safety Critical Faults)			X					
3.8.9.6.2	4.8.9.6.2	BIT PFI (Safety Critical Faults)			X					
3.8.9.7	4.8.9.7	BIT PFD (All Faults)			X					
3.8.9.8	4.8.9.8	BIT PFI (All Faults)			X					
3.8.10	4.8.10	Mean Flight Hours Between Sortie Aborting False Alarms (MFHBSAFA)							X	X
3.8.11	4.8.11	Mean Flight Hours Between False Alarms (MFHBFA)							X	X
3.8.12	4.8.12	Nameplates and Product Marking		X						
3.8.13	4.8.13	Maintenance Concept		X						
3.8.13.1	4.8.13.1	Propulsion System Sustainability		X		X				
3.8.13.2	4.8.13.2	Engine Start System Sustainability		X		X				
3.8.14	4.8.14	Support Equipment (SE)	X							

UNCLASSIFIED

Legend:										
N - Not applicable		I - Inspection		g - Ground demonstration		L - Laboratory test				
A - Analysis		f - Flight demonstration		G - Ground test		F - Flight test				
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F
3.8.14.1	4.8.14.1	Support Equipment Environment		X		X		X		
3.8.14.2	4.8.14.2	Support Equipment/Facility Interfaces		X		X				
3.8.14.3	4.8.14.3	Aircraft/Support Equipment (SE) Interfaces		X		X				
3.8.15	4.8.15	Maintenance Work Environment	X							
3.8.15.1	4.8.15.1	Climatic/Environmental Work Conditions			X	X				
3.8.15.2	4.8.15.2	Maintainer Accommodation			X	X				
3.8.16	4.8.16	Manpower and Personnel				X				
3.9	4.9	Climatic and Environmental Conditions		X	X			X	X	X
3.9.1	4.9.1	Natural Climate	X							
3.9.1.1	4.9.1.1	Operational Conditions						X	X	X
3.9.1.2	4.9.1.2	Environment Condition Lapse Rates for Non-Standard Days								X
3.9.1.3	4.9.1.3	Icing Conditions								X
3.9.2	4.9.2	Induced Environment	X							
3.9.2.1	4.9.2.1	Storage and Transit Conditions						X	X	X
3.9.2.2	4.9.2.2	Operating Conditions						X	X	X
3.9.3	4.9.3	Electromagnetic Environmental Effects (E3)		X	X			X	X	
3.10	4.10	Architecture and Security	X							
3.10.1	4.10.1	Critical Program Information								
3.10.2	4.10.2	Cybersecurity		X				X		
3.10.3	4.10.3	Open Systems Architecture		X				X		
3.10.4	4.10.4	Computing Resources	X							
3.10.4.1	4.10.4.1	Memory Storage			X	X				
3.10.4.2	4.10.4.2	Computer Resources			X			X		
3.10.4.3	4.10.4.3	Operational Flight Program (OFP)/Software Item (SI) Versions				X		X		
3.10.4.4	4.10.4.4	Operational Flight Program (OFP)/Software Item (SI) Load and Verification				X		X		
3.10.5	4.10.5	ARINC 610 Simulator Compatibility		X						
3.11	4.11	Utility Attributes	X							
3.11.1	4.11.1	Fuel Standards		X			X			
3.11.1.1	4.11.1.1	Fuel Contaminants		X			X			
3.11.2	4.11.2	Lubrication Oil Standards		X						
3.11.3	4.11.3	Space, Weight, and Power with Cooling (SWaP-C) Margins	X							
3.11.3.1	4.11.3.1	Space		X						
3.11.3.2	4.11.3.2	Weight		X			X			
3.11.3.3	4.11.3.3	Power		X						
3.11.3.4	4.11.3.4	Cooling		X	X				X	X
3.11.4	4.11.4	Aircraft Maintenance Safety Protection Equipment (MSPE) Stowage		X		X				
3.11.5	4.11.5	External Stores			X	X				X
3.11.5.1	4.11.5.1	Stores Electrical Interfaces		X						
3.11.6	4.11.6	Environment, Safety and Occupational Health (ESOH)	X							
3.11.6.1	4.11.6.1	Safety		X	X			X	X	X
3.11.6.2	4.11.6.2	Federal and State Laws		X	X					
3.11.6.3	4.11.6.3	Hazards		X	X			X	X	X
3.11.6.4	4.11.6.4	Energetic Materials		X	X			X		
3.11.6.5	4.11.6.5	Hazardous Materials (HAZMAT)		X	X					
3.11.6.6	4.11.6.6	Air Force Occupational Safety		X	X			X	X	X
3.11.7	4.11.7	Airworthiness Certification		X						
3.11.8	4.11.8	Geographic Intelligence (GEOINT)		X						
3.11.9	4.11.9	Barrier Rollover				X				
3.12	4.12	Mission Support				X				
3.12.1	4.12.1	Data Transfer				X				
3.12.1.1	4.12.1.1	DTD Design		X		X				
3.12.1.2	4.12.1.2	On-Board Data Upload							X	

UNCLASSIFIED

Legend:											
N - Not applicable			I - Inspection			g - Ground demonstration			L - Laboratory test		
			A - Analysis			f - Flight demonstration			G - Ground test		
									F - Flight test		
Section 3	Section 4	SS Title	N	I	A	g	f	L	G	F	
3.12.1.3	4.12.1.3	DTD Adapter		X							
3.12.2	4.12.2	Mission Planning Interface				X					
3.12.3	4.12.3	Mission Scenario Generation				X					
3.12.4	4.12.4	Mission Debriefing				X					
3.12.4.1	4.12.4.1	Debriefing Operation				X					
3.12.4.2	4.12.4.2	Multi-Ship Debriefing				X					
3.12.4.3	4.12.4.3	Data Uploading						X			
3.12.4.4	4.12.4.4	Data Melding						X			
3.12.4.5	4.12.4.5	Two- and Three-Dimensional Perspective Views				X					
3.12.4.6	4.12.4.6	Playback Controls				X					

2514 4.1 Performance and Structural Characteristics

2515 No requirement to verify.

2516 4.1.1 Performance Ground Rules

2517 No requirement to verify.

2518 4.1.2 Performance

2519 No requirement to verify.

2520 4.1.2.1 High G Maneuvering

2521 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2522 include evaluation in a 6-Degree of Freedom (DOF) simulation environment. The requirement
2523 shall be successfully verified when the Government confirms the full content of the requirement
2524 is met to the extent that the verification method(s) can provide.

2525 4.1.2.2 Instantaneous G-onset Rate

2526 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2527 include evaluation in a 6-DOF simulation environment. The requirement shall be successfully
2528 verified when the Government confirms the full content of the requirement is met to the extent
2529 that the verification method(s) can provide.

2530 4.1.2.2.1 Average G-onset Rate

2531 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2532 include evaluation in a 6-DOF simulation environment. The requirement shall be successfully
2533 verified when the Government confirms the full content of the requirement is met to the extent
2534 that the verification method(s) can provide.

2535 4.1.2.3 Negative and Zero G Flight

2536 No requirement to verify.

2537 4.1.2.3.1 Negative G Flight

2538 The requirement shall be verified by analysis, ground demonstration, laboratory test, and flight
2539 test. The requirement shall be successfully verified when the Government confirms the full
2540 content of the requirement is met to the extent that the verification method(s) can provide.

2541 4.1.2.3.2 Zero G Flight

2542 The requirement shall be verified by analysis, ground demonstration, laboratory test, and flight
2543 test. The requirement shall be successfully verified when the Government confirms the full
2544 content of the requirement is met to the extent that the verification method(s) can provide.

2545 4.1.2.4 Instantaneous Turn Rate

2546 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2547 include evaluation in a 6-DOF simulation environment. The requirement shall be successfully
2548 verified when the Government confirms the full content of the requirement is met to the extent
2549 that the verification method(s) can provide.

2550 4.1.2.5 Sustained Turn Rate

2551 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2552 include evaluation in a 6-DOF simulation environment. The requirement shall be successfully
2553 verified when the Government confirms the full content of the requirement is met to the extent
2554 that the verification method(s) can provide.

2555 4.1.2.6 High Angle-of-Attack (AOA) Maneuvering

2556 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2557 include evaluation in a 6-DOF simulation environment. Flight test shall consist of, at a
2558 minimum, Handling Qualities During Tracking tasks, and pitch and roll captures. The
2559 requirement shall be successfully verified when the Government confirms the full content of the
2560 requirement is met to the extent that the verification method(s) can provide.

2561 4.1.2.7 Flight Endurance

2562 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2563 include evaluation in a 6-DOF simulation environment. The analysis shall be based on *aircraft*
2564 and installed engine performance models. The analysis shall be verified by flight test. The
2565 requirement shall be successfully verified when the Government confirms the full content of the
2566 requirement is met to the extent that the verification method(s) can provide.

2567 4.1.2.8 Takeoff Distance

2568 The requirement shall be verified by analysis, ground test and flight test. Ground test shall
2569 include evaluation in a 6-DOF simulation environment. The flight test shall consist of normal
2570 takeoffs at forward and aft CG limits from minimum to maximum takeoff speed. The analysis
2571 shall include a total braking coefficient of 0.20 for an RCR of 12 unless flight test data
2572 substantiates use of other coefficients. The requirement shall be successfully verified when the
2573 Government confirms the full content of the requirement is met to the extent that the verification
2574 method(s) can provide.

2575 4.1.2.9 Landing Distance

2576 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2577 include evaluation in a 6-DOF simulation environment. The flight test shall consist of normal
2578 landings throughout the CG range. The analysis shall include a total braking coefficient of 0.20
2579 for an RCR of 12 unless flight test data substantiates use of other coefficients. The requirement
2580 shall be successfully verified when the Government confirms the full content of the requirement
2581 is met to the extent that the verification method(s) can provide.

2582 4.1.2.10 Takeoff and Landing in Crosswinds

2583 No requirement to verify.

2584 4.1.2.10.1 Lateral-Directional Control in Crosswinds

2585 The requirement shall be verified by analysis and flight test. The flight test shall consist of
2586 normal takeoff and landings in crosswinds at or above 80% of the requirement throughout the
2587 CG range with and without stores. The requirement shall be successfully verified when the
2588 Government confirms the full content of the requirement is met to the extent that the verification
2589 method(s) can provide.

2590 4.1.2.10.2 Takeoff Run and Landing Rollout in Crosswinds

2591 The requirement shall be verified by analysis and flight test. The flight test shall consist of
2592 normal takeoff and landings in crosswinds at or above 80% of the requirement throughout the
2593 CG range with and without stores. The requirement shall be successfully verified when the
2594 Government confirms the full content of the requirement is met to the extent that the verification
2595 method(s) can provide.

2596 4.1.2.11 Takeoff Climb Gradient Performance

2597 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2598 include evaluation in a 6-DOF simulation environment. The analysis shall be based on *aircraft*
2599 and installed engine performance models. The analysis shall be verified by flight test. The
2600 requirement shall be successfully verified when the Government confirms the full content of the
2601 requirement is met to the extent that the verification method(s) can provide.

2602 4.1.2.12 General Handling Characteristics (including all store loadout configurations)

2603 No requirement to verify.

2604 4.1.2.12.1 Aircraft Flying Qualities

2605 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2606 include evaluation in a 6-DOF simulation environment. The requirement shall be successfully
2607 verified when the Government confirms the full content of the requirement is met to the extent
2608 that the verification method(s) can provide.

2609 4.1.2.12.2 Flying Qualities in Atmospheric Disturbances

2610 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2611 include evaluation in a 6-DOF simulation environment. The requirement shall be successfully
2612 verified when the Government confirms the full content of the requirement is met to the extent
2613 that the verification method(s) can provide.

2614 4.1.2.12.3 Student Skill Level Handling Characteristics

2615 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2616 include evaluation in a 6-DOF simulation environment. The requirement shall be successfully

2617 verified when the Government confirms the full content of the requirement is met to the extent
2618 that the verification method(s) can provide.

2619 **4.1.2.12.4 Student Fault Tolerant Flight Characteristics**

2620 The requirement shall be verified by analysis, ground test, and flight test. Ground test shall
2621 include evaluation in a 6-DOF simulation environment. The requirement shall be successfully
2622 verified when the Government confirms the full content of the requirement is met to the extent
2623 that the verification method(s) can provide.

2624 **4.1.2.12.5 Control Margin**

2625 The requirement shall be verified by analysis and flight test. The analysis shall include the
2626 effects of *failures* on control margin. The flight test shall include only those *failures* that can
2627 readily and safely be simulated in flight. Both analysis and flight test shall encompass the total
2628 CG range, nominal trim settings, and any attainable angle of attack and sideslip. The
2629 requirement shall be successfully verified when the Government confirms the full content of the
2630 requirement is met to the extent that the verification method(s) can provide.

2631 **4.1.2.12.6 Safe Termination**

2632 The requirement shall be verified by analysis and flight test.

2633 **4.1.2.12.7 Warning and Indication of Approach to Dangerous Flight Conditions**

2634 The requirement shall be verified by analysis and flight test. The flight test shall consist of
2635 aircrew evaluations of *warning* and indications of approach to *dangerous flight conditions*. The
2636 verification shall be considered successful when the aircrew comments indicate that these
2637 *warnings* and indications are clear and unambiguous and the aircrew can recognize the
2638 impending dangers in time to take preventative action to avoid dangerous conditions. The
2639 analysis shall be used to evaluate Failure States if the *failures* are considered too dangerous to
2640 test in flight.

2641 **4.1.2.12.8 Departure Resistance**

2642 The requirement shall be verified by analysis and flight test. Flight test shall include the entire
2643 CG envelope, and any *failures* (simulated) that can affect departure. Analysis shall address
2644 *failures* considered too dangerous to test in flight. The requirement shall be successfully verified
2645 when the Government confirms the full content of the requirement is met to the extent that the
2646 verification method(s) can provide.

2647 **4.1.2.12.8.1 Recovery from Post-Stall Gyration and Spins**

2648 The requirement shall be verified by analysis and flight test. Flight test shall include the entire
2649 CG envelope, and any *failures* (simulated) that can affect departure. Analysis shall address
2650 *failures* considered too dangerous to test in flight. The requirement shall be successfully verified
2651 when the Government confirms the full content of the requirement is met to the extent that the
2652 verification method(s) can provide.

2653 4.1.2.12.9 Stalls

2654 No requirement to verify.

2655 4.1.2.12.9.1 Approach to Stall

2656 The requirement shall be verified by flight test. The flight test shall consist of aircrew
2657 evaluations and time histories of the stall approaches. The requirement shall be successfully
2658 verified when the Government confirms the full content of the requirement is met to the extent
2659 that the verification method(s) can provide.

2660 4.1.2.12.9.2 Tactile/Physical Cues for Stall Warning

2661 The requirement shall be verified by flight test. The flight test shall consist of aircrew
2662 evaluations and time histories of the stall approaches. The verification shall be considered
2663 successful when aircrew comments indicate tactile/physical cues are adequate for stall *warning*.

2664 4.1.2.12.9.3 Aural and Visual Stall Warning

2665 No requirement to verify.

2666 4.1.2.12.9.3.1 Aural and Visual Cues for Stall Warning

2667 The requirement shall be verified by analysis and flight test. The flight test shall include the
2668 entire CG envelope, all stores configurations, and any *failures* (simulated) that may affect stall
2669 *warning*. The analysis shall consist of *failures* not addressed in flight test. The requirement shall
2670 be successfully verified when the Government confirms the full content of the requirement is met
2671 to the extent that the verification method(s) can provide.

2672 4.1.2.12.9.3.2 Aural and Visual Stall Warning Duration

2673 The requirement shall be verified by analysis and flight test. The flight test shall include the
2674 entire CG envelope, all stores configurations, and any *failures* (simulated) that may affect stall
2675 *warning*. The analysis shall consist of *failures* not addressed in flight test. The requirement shall
2676 be successfully verified when the Government confirms the full content of the requirement is met
2677 to the extent that the verification method(s) can provide.

2678 4.1.2.12.9.3.3 Aural and Visual Stall Warning Conditions

2679 The requirement shall be verified by analysis and flight test. The flight test shall include the
2680 entire CG envelope, all stores configurations, and any *failures* (simulated) that may affect stall
2681 *warning*. The analysis shall consist of *failures* not addressed in flight test. The requirement shall
2682 be successfully verified when the Government confirms the full content of the requirement is met
2683 to the extent that the verification method(s) can provide.

2684 4.1.2.12.9.4 Stall Recovery

2685 The requirement shall be verified by flight test. The flight test shall consist of aircrew
2686 evaluations and time histories of the stall recoveries. The flight test shall consist of both stall
2687 approaches broken off at stall *warning* and complete stall to an *AOA* great enough to identify V_s .
2688 The verification shall be considered successful when aircrew comments indicate stall recoveries

2689 can be accomplished by simple use of cockpit controls without excessive control forces,
2690 excessive loss of altitude or build-up of speed.

2691 **4.1.2.12.10 Buffet**

2692 The requirement shall be verified by flight test. The flight test shall consist of aircrew
2693 evaluations of flights over the operational load factor and airspeed ranges and at the minimum
2694 and maximum operational altitudes. The verification shall be considered successful when
2695 aircrew comments indicate that buffet tendencies of the *aircraft* are not so *objectionable* as to
2696 detract from mission effectiveness.

2697 **4.1.2.12.11 Pilot-in-the-loop Oscillations (PIO)**

2698 The requirement shall be verified by analysis and flight test. The flight test shall consist of
2699 aircrew evaluations during a general *handling qualities* evaluation. The requirement shall be
2700 successfully verified when the Government confirms the full content of the requirement is met to
2701 the extent that the verification method(s) can provide.

2702 **4.1.2.12.12 Failures**

2703 The requirement shall be verified by analysis, ground test, and flight test. The analysis shall
2704 include a FMECA and Failure Modes and Effects Testing (FMET). For conditions that are
2705 considered too dangerous to test in flight, verification shall be shown by analysis. Ground test
2706 shall include evaluation in a 6-DOF simulation environment. The verification shall be
2707 considered successful when analysis and aircrew comments indicate that no single *failure* of any
2708 *component* or system results in dangerous or intolerable *flying qualities*.

2709 **4.1.2.13 Flight Control System (including all store loadout configurations)**

2710 No requirement to verify.

2711 **4.1.2.13.1 Augmentation Systems**

2712 No requirement to verify.

2713 **4.1.2.13.1.1 Augmentation System Operation**

2714 The requirement shall be verified by analysis, ground demonstration, and flight test. The flight
2715 test shall include the most common operating conditions, any operating conditions critical to the
2716 mission of the *aircraft*, and any conditions determined by analysis or simulation to cause
2717 *objectionable* flight characteristics. For conditions that are considered too dangerous to test in
2718 flight, verification shall be shown by analysis. The requirement shall be successfully verified
2719 when the Government confirms the full content of the requirement is met to the extent that the
2720 verification method(s) can provide.

2721 **4.1.2.13.1.2 Augmentation System Performance Degradation**

2722 The requirement shall be verified by analysis, ground demonstration, and flight test. The flight
2723 test shall include the most common operating conditions, any operating conditions critical to the
2724 mission of the *aircraft*, and any conditions determined by analysis or simulation to cause

2725 *objectionable* flight characteristics. For conditions that are considered too dangerous to test in
2726 flight, verification shall be shown by analysis. The requirement shall be successfully verified
2727 when the Government confirms the full content of the requirement is met to the extent that the
2728 verification method(s) can provide.

2729 **4.1.2.13.1.3 Flight Control System Operation**

2730 The requirement shall be verified by analysis, ground test, and flight test. The specific flight
2731 conditions to be evaluated shall be the most common operating conditions, any operating
2732 conditions critical to the mission of the air vehicle, and those flight conditions where transients
2733 due to configuration and mode change are predicted to be at their greatest. The mode changes to
2734 be evaluated shall include intentional mode switches by the aircrew, as well as any mode
2735 switches caused by the flight control system automatically, with or without the aircrew member
2736 conscious intent. Proof of compliance shall consist of time histories of air vehicle response and
2737 aircrew inputs, pilot comments, and C-H ratings. The comments and ratings shall indicate that
2738 the *flying qualities* are no worse than the required Level of *flying qualities* for each combination
2739 of Air Vehicle State and Flight Phase. The requirement shall be successfully verified when the
2740 Government confirms the full content of the requirement is met to the extent that the verification
2741 method(s) can provide.

2742 **4.1.2.13.2 Control Surface Displacement Rates**

2743 The requirement shall be verified by analysis and flight test. The flight test shall consist of
2744 aircrew evaluations of flights in the most common operating conditions and any operating
2745 conditions critical to the mission of the *aircraft*. For conditions that are considered too
2746 dangerous to test in flight, verification shall be shown by analysis. The verification shall be
2747 considered successful when aircrew comments indicate that the *flying qualities* are no worse than
2748 the required level of *flying qualities*.

2749 **4.1.2.13.3 Cockpit Controller Characteristics**

2750 The requirement shall be verified by analysis and flight test. The flight test shall consist of
2751 aircrew evaluations of flights over the operational load factor and airspeed ranges and at the
2752 minimum and maximum operational altitudes. The verification shall be considered successful
2753 when aircrew comments indicate the cockpit controller characteristics do not result in
2754 *objectionable flying qualities*.

2755 **4.1.2.13.3.1 Cross-coupling**

2756 The requirement shall be verified by analysis and flight test. The flight test shall consist of all
2757 expected *aircraft* maneuvers. The requirement shall be successfully verified when the
2758 Government confirms the full content of the requirement is met to the extent that the verification
2759 method(s) can provide.

2760 **4.1.2.13.4 Control Centering**

2761 The requirement shall be verified by analysis and flight test. The flight test shall consist of
2762 aircrew evaluations of flights over the operational load factor and airspeed ranges and at the
2763 minimum and maximum operational altitudes. The verification shall be considered successful

2764 when aircrew comments indicate that control centering characteristics do not results in
2765 *objectionable flying qualities*.

2766 **4.1.2.13.5 Control Free Play**

2767 The requirement shall be verified by analysis and flight test. The flight test shall consist of
2768 aircrew evaluations of flights over the operational load factor and airspeed ranges and at the
2769 minimum and maximum operational altitudes. The verification shall be considered successful
2770 when aircrew comments indicate control free play does not result in *objectionable flying*
2771 *qualities*.

2772 **4.1.2.13.6 Control Linearity**

2773 The requirement shall be verified by flight test. The flight test shall consist of aircrew
2774 evaluations of flights over a series of large- and small-amplitude rapid target acquisition and
2775 precise tracking maneuvers. The verification shall be considered successful when aircrew
2776 comments indicate the cockpit controller characteristics do not result in *objectionable flying*
2777 *qualities*.

2778 **4.1.2.14 Over-G Condition (including all store loadout configurations)**

2779 **4.1.2.14.1 Warnings of Approaching G Limit**

2780 The requirement shall be verified by analysis and flight test. The requirement shall be
2781 successfully verified when the Government confirms the full content of the requirement is met to
2782 the extent that the verification method(s) can provide.

2783 **4.1.2.14.2 G-limiter**

2784 The requirement shall be verified by analysis and flight test. The requirement shall be
2785 successfully verified when the Government confirms the full content of the requirement is met to
2786 the extent that the verification method(s) can provide.

2787 **4.1.2.14.3 Over-G Feedback**

2788 The requirement shall be verified by inspection and analysis. The requirement shall be
2789 successfully verified when the Government confirms the full content of the requirement is met to
2790 the extent that the verification method(s) can provide.

2791 **4.1.3 Structures**

2792 No requirement to verify.

2793 **4.1.3.1 Design Service Life**

2794 The requirement shall be verified by analysis, ground test, and flight test. Airframe *design*
2795 *service life* shall be verified by review of structural analyses, tests, and flight test programs
2796 conducted on the basic and/or production *aircraft*. Durability and damage tolerance analyses
2797 shall be conducted to support the *design service life* estimate and establish crack growth
2798 characteristics of the airframe. A full-scale durability and damage tolerance test of a production
2799 airframe shall be conducted to verify the airframe's operational service life. Minimum durability

2800 test duration shall be two lifetimes. Damage tolerance testing may be performed during a third
2801 life of durability testing or on separate *components*. The requirement shall be successfully
2802 verified when the Government confirms the full content of the requirement is met to the extent
2803 that the verification method(s) can provide.

2804 **4.1.3.2 Materials, Processes, and Parts**

2805 The requirement shall be verified by inspection of drawings, material and process specifications,
2806 and certification data. The requirement shall be successfully verified when the Government
2807 confirms the full content of the requirement is met to the extent that the verification method(s)
2808 can provide.

2809 **4.1.3.3 Fasteners**

2810 The requirement shall be verified by inspection. The inspection shall include drawings and the
2811 *aircraft*. The requirement shall be successfully verified when the Government confirms the full
2812 content of the requirement is met to the extent that the verification method(s) can provide.

2813 **4.1.3.4 Corrosion Prevention and Control**

2814 The requirement shall be verified by inspection and laboratory test. The inspection shall include
2815 drawings, model specifications, finish and sealing specifications, corrosion control plan, and
2816 maintenance instructions. The requirement shall be successfully verified when the Government
2817 confirms the full content of the requirement is met to the extent that the verification method(s)
2818 can provide.

2819 **4.1.3.4.1 Paint Scheme**

2820 The requirement shall be verified by inspection of drawings and certification data. The
2821 requirement shall be successfully verified when the Government confirms the full content of the
2822 requirement is met to the extent that the verification method(s) can provide.

2823 **4.1.3.5 General Parameters and Conditions**

2824 No requirement to verify.

2825 **4.1.3.5.1 Airframe Configurations**

2826 The requirement shall be verified by inspection. The inspection shall include drawings and the
2827 *aircraft*. The requirement shall be successfully verified when the Government confirms the full
2828 content of the requirement is met to the extent that the verification method(s) can provide.

2829 **4.1.3.5.2 Equipment and Stores**

2830 The requirement shall be verified by analysis, laboratory or ground test, and flight test. The
2831 requirement shall be successfully verified when the Government confirms the full content of the
2832 requirement is met to the extent that the verification method(s) can provide.

2833 4.1.3.5.3 Speeds

2834 The requirement shall be verified by analysis and flight test. The requirement shall be
2835 successfully verified when the Government confirms the full content of the requirement is met to
2836 the extent that the verification method(s) can provide.

2837 4.1.3.5.4 Altitudes

2838 The requirement shall be verified by analysis and flight test. The requirement shall be
2839 successfully verified when the Government confirms the full content of the requirement is met to
2840 the extent that the verification method(s) can provide.

2841 4.1.3.5.5 Limit Loads

2842 The requirement shall be verified by analysis, laboratory test, and flight test. The requirement
2843 shall be successfully verified when the Government confirms the full content of the requirement
2844 is met to the extent that the verification method(s) can provide.

2845 4.1.3.5.6 Ultimate Loads

2846 The requirement shall be verified by analysis and laboratory or ground test. The strength
2847 analyses verification shall verify the appropriate factors of safety in section 3.1.3.5.6 have been
2848 applied. The requirement shall be successfully verified when the Government confirms the full
2849 content of the requirement is met to the extent that the verification method(s) can provide.

2850 4.1.3.6 Structural Loads

2851 No requirement to verify.

2852 4.1.3.6.1 Flight Loads

2853 The requirement shall be verified by analysis, ground test, and flight test. Analysis and tests
2854 shall be of sufficient scope to determine and verify the loads resulting from and commensurate
2855 with the flight loading conditions of 3.1.3.6.1. The requirement shall be successfully verified
2856 when the Government confirms the full content of the requirement is met to the extent that the
2857 verification method(s) can provide.

2858 4.1.3.6.1.1 Symmetric Maneuver Load Factors

2859 The requirement shall be verified by analysis and flight test. The requirement shall be
2860 successfully verified when the Government confirms the full content of the requirement is met to
2861 the extent that the verification method(s) can provide.

2862 4.1.3.6.1.2 Asymmetric Maneuver Load Factors

2863 The requirement shall be verified by analysis and flight test. The requirement shall be
2864 successfully verified when the Government confirms the full content of the requirement is met to
2865 the extent that the verification method(s) can provide.

2866 4.1.3.6.1.3 Pressurization

2867 The requirement shall be verified by analysis and ground test. The requirement shall be
2868 successfully verified when the Government confirms the full content of the requirement is met to
2869 the extent that the verification method(s) can provide.

2870 4.1.3.6.1.4 Discrete Gust Loads

2871 This requirement shall be verified by inspection of analysis data. The requirement shall be
2872 successfully verified when the Government confirms the full content of the requirement is met to
2873 the extent that the verification method(s) can provide.

2874 4.1.3.6.1.4.1 Discrete Gust Formulas

2875 The requirement shall be verified by inspection of analysis data. The requirement shall be
2876 successfully verified when the Government confirms the full content of the requirement is met to
2877 the extent that the verification method(s) can provide.

2878 4.1.3.6.2 Ground Loads

2879 The requirement shall be verified by analysis and ground test. The requirement shall be
2880 successfully verified when the Government confirms the full content of the requirement is met to
2881 the extent that the verification method(s) can provide.

2882 4.1.3.6.2.1 Landing Sink Speeds

2883 The requirement shall be verified by analysis and landing gear drop test. The requirement shall
2884 be successfully verified when the Government confirms the full content of the requirement is met
2885 to the extent that the verification method(s) can provide.

2886 4.1.3.6.2.2 Ground Wind Loads

2887 No requirement to verify.

2888 4.1.3.6.2.2.1 Mooring

2889 The wind requirement shall be verified by analysis. Installed equipment and provision
2890 requirements shall be verified by inspection. The requirement shall be successfully verified
2891 when the Government confirms the full content of the requirement is met to the extent that the
2892 verification method(s) can provide.

2893 4.1.3.6.2.2.2 Doors, Canopy, and Windshield

2894 The maintainability requirement shall be verified by ground demonstration. The wind loading
2895 requirement shall be verified by analysis. The requirement shall be successfully verified when
2896 the Government confirms the full content of the requirement is met to the extent that the
2897 verification method(s) can provide.

2898 4.1.3.6.2.2.3 Crosswinds Loads

2899 The requirement shall be verified by analysis. The requirement shall be successfully verified
2900 when the Government confirms the full content of the requirement is met to the extent that the
2901 verification method(s) can provide.

2902 4.1.3.6.3 Repeated Loads

2903 The requirement shall be verified by analysis. The requirement shall be successfully verified
2904 when the Government confirms the full content of the requirement is met to the extent that the
2905 verification method(s) can provide.

2906 4.1.3.6.3.1 Maneuvers

2907 The requirement shall be verified by analysis.

2908 4.1.3.6.3.2 Gusts

2909 The requirement shall be verified by analysis. The requirement shall be successfully verified
2910 when the Government confirms the full content of the requirement is met to the extent that the
2911 verification method(s) can provide.

2912 4.1.3.6.3.3 Landings

2913 The requirement shall be verified by analysis. The requirement shall be successfully verified
2914 when the Government confirms the full content of the requirement is met to the extent that the
2915 verification method(s) can provide.

2916 4.1.3.6.3.4 Other Ground Loads

2917 The requirement shall be verified by analysis. The requirement shall be successfully verified
2918 when the Government confirms the full content of the requirement is met to the extent that the
2919 verification method(s) can provide.

2920 4.1.3.6.3.5 Pressurization

2921 The requirement shall be verified by analysis. The requirement shall be successfully verified
2922 when the Government confirms the full content of the requirement is met to the extent that the
2923 verification method(s) can provide.

2924 4.1.3.6.3.6 Repeated Operation of Movable Structures

2925 The requirement shall be verified by analysis. The requirement shall be successfully verified
2926 when the Government confirms the full content of the requirement is met to the extent that the
2927 verification method(s) can provide.

2928 4.1.3.7 Bird Strike/Hail Impact

2929 No requirement to verify.

2930 4.1.3.7.1 Transparency System Bird Strike Capability

2931 The requirement shall be verified by analysis and laboratory test. Verification tests on
2932 production representative complete full scale articles with appropriate backup structure and
2933 representative aircrew members in accordance with ASTM F-330, Standard Test Method for
2934 Bird Impact Testing of Aerospace Transparent Enclosures shall be conducted. The requirement
2935 shall be successfully verified when the Government confirms the full content of the requirement
2936 is met to the extent that the verification method(s) can provide.

2937 4.1.3.7.2 Airframe and Engine Inlet Bird Strike Capability

2938 The requirement shall be verified by analysis and laboratory test. Bird strike requirements shall
2939 be verified by analyses and ground tests conducted on critical sections of the wing and
2940 empennage. For the forward fuselage and engine inlet, verification shall be accomplished by
2941 analyses only. The requirement shall be successfully verified when the Government confirms
2942 the full content of the requirement is met to the extent that the verification method(s) can
2943 provide.

2944 4.1.3.7.3 Hail Impact Protection

2945 The requirement shall be verified by analysis and laboratory test. Test articles (such as coupons
2946 or *component* mock-ups) representing selected critical sections of the airframe (as determined by
2947 analyses and/or previous testing), to include the upper surfaces of the wings, transparency
2948 system, fuselage, and empennage, that might be exposed to hail while parked on the ramp shall
2949 be subjected to impacts of simulated ice pellets of 0.83 grams/cm³ density propelled at the test
2950 article at a velocity determined by the following equation:

2951 Velocity (meters per second) = $9(d^{0.8})$, where d = the diameter in centimeters.

2952 The requirement shall be successfully verified when the Government confirms the full content of
2953 the requirement is met to the extent that the verification method(s) can provide.

2954 4.1.3.8 Vibroacoustics

2955 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
2956 requirement shall be successfully verified when the Government confirms the full content of the
2957 requirement is met to the extent that the verification method(s) can provide.

2958 4.1.3.8.1 Aeroacoustics

2959 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
2960 requirement shall be successfully verified when the Government confirms the full content of the
2961 requirement is met to the extent that the verification method(s) can provide.

2962 4.1.3.8.2 Vibration

2963 The requirement shall be verified by analysis and ground test consistent with JSSG-2006, A.4.6.
2964 Ground vibration tests and on-aircraft inspection of *components* and a complete airframe with
2965 and without external stores shall include determination of natural frequencies, mode shapes, and
2966 damping of vibration of airframe *components*. The requirement shall be successfully verified

2967 when the Government confirms the full content of the requirement is met to the extent that the
2968 verification method(s) can provide.

2969 **4.1.3.8.3 Aeroelastic Stability (Flutter and Divergence)**

2970 The requirement shall be verified by analysis, laboratory test, ground test, and flight test
2971 consistent with JSSG-2006, A.4.7. The requirement shall be successfully verified when the
2972 Government confirms the full content of the requirement is met to the extent that the verification
2973 method(s) can provide.

2974 **4.2 Avionics**

2975 No requirement to verify.

2976 **4.2.1 Communications**

2977 No requirement to verify.

2978 **4.2.1.1 Multi-Band Radios**

2979 This requirement shall be verified by inspection. The inspection shall verify that each of the
2980 multi-band radios is capable of providing for simultaneous and independent two-way UHF and
2981 VHF band communications (non-secured), interoperable with military and civilian VHF/UHF
2982 voice systems. This verification shall be considered successful when the inspection shows that
2983 the radios are capable as specified.

2984 **4.2.1.2 Ultra High Frequency (UHF) Communication**

2985 This requirement shall be verified by flight demonstration. The flight demonstration shall
2986 consist of verifying the UHF Communication system provides for simultaneous two-way UHF
2987 band communication (non-secured), interoperable with military UHF voice systems including
2988 continuous monitoring of the UHF guard frequency. This verification shall be considered
2989 successful when the flight demonstration shows that the radios operate as specified.

2990 **4.2.1.3 Very High Frequency (VHF) Communication**

2991 This requirement shall be verified by flight demonstration. The flight demonstration shall consist
2992 of verifying the VHF Communication system provides for simultaneous two-way VHF band
2993 communication (non-secured), interoperable with civilian VHF voice systems including
2994 continuous monitoring of the VHF guard frequency. This verification shall be considered
2995 successful when the flight demonstration shows that the radios operate as specified and the
2996 installed performance conforms to the VHF Tailored Performance Matrix for operation in the
2997 118-137 MHz band for air traffic control (ATC) communications.

2998 **4.2.1.4 Simultaneous UHF and VHF Communication**

2999 This requirement shall be verified by flight demonstration. The flight demonstration shall consist
3000 of verifying that each of the multi-band radios provides simultaneous and independent two-way
3001 UHF and VHF band communications (non-secured), interoperable with military and civilian

3002 VHF/UHF voice systems. This verification shall be considered successful when the flight
3003 demonstration shows that the radios operate as specified.

3004 **4.2.1.5 Communication System Setup**

3005 This requirement shall be verified by ground demonstration. The ground demonstration shall
3006 consist of verifying the Communication system provides both aircrew for manual setup of and
3007 software-driven (from pre-flight planning via data transfer device) loading of all radio
3008 communication modes and radio frequency channel presets. This verification shall be
3009 considered successful when the ground demonstration shows that the radios can be configured as
3010 specified.

3011 **4.2.1.6 Emergency Locator Transmitter (ELT)**

3012 The requirement shall be verified by ground test. At the FAA designated time of top of the hour
3013 to 5 minutes after the hour, the ELT shall be activated per a ground test procedure. The ground
3014 test shall consist of verifying the ELT transmits concurrently on 406 MHz, 243 MHz and 121.5
3015 MHz. This verification shall be considered successful when the ELT emergency tones are heard
3016 on a VHF receiver on 121.5 MHz, UHF receiver on 243 MHz and SAT receiver on 406 MHz.

3017 **4.2.2 Navigation**

3018 No requirement to verify.

3019 **4.2.2.1 Reduced Vertical Separation Minimum (RVSM)**

3020 This requirement shall be verified by flight test. The flight test shall verify that the *aircraft*
3021 installed performance conforms to the RVSM Tailored Performance Matrix for operation in
3022 RVSM airspace in accordance with Advisory Circular 91-85(.). The requirement shall be
3023 successfully verified when the Government confirms the full content of the requirement is met to
3024 the extent that the verification method(s) can provide.

3025 **4.2.2.2 Global Positioning System (GPS)**

3026 This requirement shall be verified by laboratory test. The laboratory test shall consist of showing
3027 the ability of the installed GPS to operate in Standard Positioning Service in a static venue. An
3028 analysis of laboratory test data shall verify the accuracy of SPS positions. This verification shall
3029 be considered successful when the *aircraft* GPS position is confirmed with a known point in the
3030 laboratory.

3031 **4.2.2.3 RNP/RNAV Navigation**

3032 This requirement shall be verified by flight test. The flight test shall consist of showing the flight
3033 management system is capable of actual navigation performance (ANP) values less than RNP-
3034 0.3 for approaches and landings and maintain a composite navigation position solution with a
3035 95% accuracy level. The flight test shall consist of showing the flight management system is
3036 capable of navigating, and providing guidance to the aircrew to fly an LNAV, LP,
3037 LNAV/VNAV and LPV approaches as specified. This verification shall be considered
3038 successful when the flight test shows that the navigation capabilities are as specified and the

3039 *aircraft* installed performance conforms to the Lateral Performance Based Navigation (LPBN),
3040 VNAV and GPS Precision Landing Tailored Performance Matrices.

3041 **4.2.2.4 Tactical Air Navigation (TACAN)**

3042 This requirement shall be verified by flight test. The flight test shall consist of showing that the
3043 TACAN is capable of being tuned and provides correct indications for navigating in accordance
3044 with selected departure, en route navigation, and approach procedures. The flight test shall also
3045 show TACAN indications for navigating TO/FROM a selected TACAN ground station as
3046 specified. This verification shall be considered successful when the capability specified is
3047 shown.

3048 **4.2.2.5 Air-to-Air TACAN**

3049 This requirement shall be verified by flight test. The flight test shall consist of using air-to-air
3050 TACAN in flight to rendezvous with an aircraft equipped with air-to-air TACAN. This
3051 verification shall be considered successful when it is shown that the *aircraft* conducts successful
3052 rendezvous with air-to-air TACAN equipped aircraft.

3053 **4.2.2.6 VHF Omni-Directional Range (VOR)/Distance Measuring Equipment (DME)**

3054 This requirement shall be verified by flight test. The flight test shall consist of showing the VOR
3055 is capable of being tuned, provides correct indications for navigating in accordance with selected
3056 departure and en route navigation procedures, provides indications for navigating TO/FROM a
3057 selected VOR ground station, and provides for approaches as specified. The flight test shall
3058 show the tuning and the correct indications are provided on the aircrew navigation display
3059 commensurate with VOR/DME and localizer DME (LOC/DME) non-precision approaches as
3060 specified. The verification shall be considered successful when the flight test shows that the
3061 capability is as specified.

3062 **4.2.2.7 Instrument Landing System (ILS)**

3063 This requirement shall be verified by flight test. The flight test shall consist of showing the ILS
3064 (CAT I) and Localizer (LOC) approaches and landings are as specified. This verification shall
3065 be considered successful when the flight test shows that the approaches and landings capability is
3066 as specified.

3067 **4.2.3 Surveillance**

3068 No requirement to verify.

3069 **4.2.3.1 Traffic Alert and Collision Avoidance System (TCAS)**

3070 This requirement shall be verified by flight test. The flight test shall verify that the *aircraft*
3071 installed performance conforms to the TCAS II Tailored Performance Matrix. The requirement
3072 shall be successfully verified when the Government confirms the full content of the requirement
3073 is met to the extent that the verification method(s) can provide.

3074 4.2.3.2 Automatic Dependent Surveillance-Broadcast (ADS-B) Out

3075 This requirement shall be verified by laboratory test and flight test. The laboratory test shall
3076 consist of showing ADS-B Out transponder operation using a Mode-S transponder test set. The
3077 laboratory test shall verify on the test set display parameters such as: lat/long, air speed, Mode
3078 3A code, ICAO 24 bit address, geometric altitude, NACp (Estimate Pos Uncertainty), NACv
3079 (Horizontal Velocity Error), call sign. The flight test shall consist of showing full up ADS-B Out
3080 operation in an active Mode-S air traffic area. The verification shall be considered successful
3081 when the laboratory test and flight test show that the communicated capability is as specified and
3082 the installed performance conforms to the ADS-B Out Tailored Performance Matrix.

3083 4.2.3.3 ADS-B In

3084 The requirement shall be verified by flight test. The flight test shall verify that the aircraft
3085 installed performance conforms to the ADS-B In Tailored Performance Matrix. The verification
3086 shall be considered successful when the flight test shows that the communicated capability is as
3087 specified and the installed performance conforms to the ADS-B In Tailored Performance Matrix

3088 4.2.3.4 Transponder

3089 This requirement shall be verified by laboratory test and flight test. The laboratory test shall
3090 consist of showing Mode-S/TCAS transponder operation using a Mode-S transponder test set.
3091 The test set shall issue an attenuated 1030 MHz interrogation signal to the Mode-S transponder
3092 and the 1090 MHz response from the Mode-S transponder shall be directly read off of the test
3093 set. The received data contents shall be analyzed against current simulation data. The test set
3094 shall then be used to transmit an attenuated 1090 MHz data signal to the Mode-S transponder.
3095 The data displayed on the display shall be verified against the data being transmitted from the
3096 test set. The flight test shall consist of showing full up Mode-S operation in an active Mode-
3097 S/TCAS air traffic area. The verification shall be considered successful when the laboratory test
3098 and flight test show that the communicated capability is as specified and the *aircraft* installed
3099 performance conforms to the Mode S Tailored Performance Matrix.

3100 4.2.3.5 Terrain Warning and Avoidance

3101 SEE APPENDIX D.

3102 4.2.4 Datalink and Network Connectivity

3103 No requirement to verify.

3104 4.2.4.1 Embedded Training Datalink

3105 The requirement shall be verified by inspection. The inspection shall consist of inspecting the
3106 aircraft drawings. The verification shall be considered successful when it is shown that the
3107 *aircraft* has a datalink.

3108 4.2.4.2 Connectivity Region (Local Flying Area)

3109 The requirement shall be verified by flight demonstration. The flight demonstration shall consist
3110 of flying multi-ship test missions utilizing a minimum of two test *aircraft*. The test missions

3111 shall include *Embedded Training* system operations between the two *aircraft*. The verification
3112 shall be considered successful when flight demonstration shows that the *aircraft* datalink
3113 provides the specified performance.

3114 **4.2.4.3 Maximum Simultaneous Load**

3115 The requirement shall be verified by analysis and flight test. The analysis shall consist of
3116 modeling and simulation to evaluate the data link throughput performance under different
3117 loading conditions. The flight test shall consist of flying multi-ship test missions utilizing up to
3118 five test *aircraft*. The flight test shall collect test data required to validate the analysis
3119 verification (modeling and simulation) results. The test missions shall include *Embedded*
3120 *Training* system (most throughput demanding) operations between all test *aircraft*. The
3121 verification shall be considered successful when the analysis verification shows that the *aircraft*
3122 datalink provides the specified performance and when analysis of flight test data shows
3123 validation of the modeling and simulation used in the analysis verification.

3124 **4.2.4.4 Multiple Concurrent Missions**

3125 The requirement shall be verified by flight demonstration. The flight demonstration shall consist
3126 of flying concurrent independent test missions utilizing multiple test *aircraft*. The test missions
3127 shall include *Embedded Training* system operations, and single-ship and multi-ship concurrent
3128 operations. The verification shall be considered successful when flight demonstration shows that
3129 the *aircraft* datalink provides the specified performance.

3130 **4.2.4.5 Ground Based Training Systems (GBTS) Connectivity**

3131 SEE APPENDIX D.

3132 **4.2.4.5.1 GBTS Voice Communication**

3133 SEE APPENDIX D.

3134 **4.2.4.6 Ground Support Station (GSS) Connectivity**

3135 SEE APPENDIX D.

3136 **4.2.4.6.1 GSS Voice Communication**

3137 SEE APPENDIX D.

3138 **4.2.4.6.2 GSS Live Monitoring**

3139 SEE APPENDIX D.

3140 **4.3 Propulsion System**

3141 No requirement to verify.

3142 4.3.1 Fuel Consumption

3143 The requirement shall be verified by analysis, and laboratory test consistent with JSSG-2007C,
3144 A.4.2.1.1 Steady-state performance. The requirement shall be successfully verified when the
3145 Government confirms the full content of the requirement is met to the extent that the verification
3146 method(s) can provide.

3147 4.3.2 Engine Starts

3148 The requirement shall be verified by analysis, laboratory test, ground test and flight test
3149 consistent with JSSG-2007C, A.4.2.2.3 (A.4.2.2.3.1-A.4.2.2.3.5). The requirement shall be
3150 successfully verified when the Government confirms the full content of the requirement is met to
3151 the extent that the verification method(s) can provide.

3152 4.3.2.1 Environmental Conditions for Engine Starts

3153 The requirement shall be verified by analysis, laboratory test, ground test and flight test
3154 consistent with JSSG-2007C, A.4.2.2.3 (A.4.2.2.3.1-A.4.2.2.3.5). The requirement shall be
3155 successfully verified when the Government confirms the full content of the requirement is met to
3156 the extent that the verification method(s) can provide.

3157 4.3.2.2 Fuel and Oils for Engine Starts

3158 The requirement shall be verified by analysis, laboratory test, ground test and flight test. The
3159 requirement shall be successfully verified when the Government confirms the full content of the
3160 requirement is met to the extent that the verification method(s) can provide.

3161 4.3.2.3 Thrust Demand at Start

3162 The requirement shall be verified by analysis, laboratory test, ground test and flight test. The
3163 requirement shall be successfully verified when the Government confirms the full content of the
3164 requirement is met to the extent that the verification method(s) can provide.

3165 4.3.2.4 Engine Ground Starts

3166 No requirement to verify.

3167 4.3.2.4.1 Ground Start Cycles

3168 The requirement shall be verified by analysis and ground demonstration consistent with JSSG-
3169 2007C, A.4.2.2.3 (A.4.2.2.3.1-A.4.2.2.3.5). The requirement shall be successfully verified when
3170 the Government confirms the full content of the requirement is met to the extent that the
3171 verification method(s) can provide.

3172 4.3.2.4.2 Altitude Range for Ground Starts

3173 The requirement shall be verified by analysis and ground demonstration consistent with JSSG-
3174 2007C, A.4.2.2.3 (A.4.2.2.3.1-A.4.2.2.3.5). The requirement shall be successfully verified when
3175 the Government confirms the full content of the requirement is met to the extent that the
3176 verification method(s) can provide.

3177 4.3.2.4.3 Wind Speed for Ground Starts

3178 The requirement shall be verified by analysis and ground demonstration consistent with JSSG-
3179 2007C, A.4.2.2.3 (A.4.2.2.3.1-A.4.2.2.3.5). The requirement shall be successfully verified when
3180 the Government confirms the full content of the requirement is met to the extent that the
3181 verification method(s) can provide.

3182 4.3.2.4.4 Hot Temperature Soak Start

3183 The requirement shall be verified by analysis and ground demonstration consistent with JSSG-
3184 2007C, A.4.2.2.3 (A.4.2.2.3.1-A.4.2.2.3.5). The requirement shall be successfully verified when
3185 the Government confirms the full content of the requirement is met to the extent that the
3186 verification method(s) can provide.

3187 4.3.2.4.5 Cold Temperature Soak Start

3188 The requirement shall be verified by analysis and ground demonstration consistent with JSSG-
3189 2007C, A.4.2.2.3 (A.4.2.2.3.1-A.4.2.2.3.5). The requirement shall be successfully verified when
3190 the Government confirms the full content of the requirement is met to the extent that the
3191 verification method(s) can provide.

3192 4.3.2.5 Engine Air Starts

3193 The requirement shall be verified by analysis, laboratory test and flight test consistent with
3194 JSSG-2007C, A.4.2.2.3 (A.4.2.2.3.1-A.4.2.2.3.5). The requirement shall be successfully verified
3195 when the Government confirms the full content of the requirement is met to the extent that the
3196 verification method(s) can provide.

3197 4.3.3 Automatic Relight

3198 The requirement shall be verified by analysis, laboratory test and flight test.

3199 4.3.4 Shutdown

3200 No requirement to verify.

3201 4.3.4.1 Fuel Flow Termination

3202 The requirement shall be verified by analysis, laboratory test, ground test and flight test
3203 consistent with JSSG-2007C, A.4.2.2.4 Stopping. The requirement shall be successfully verified
3204 when the Government confirms the full content of the requirement is met to the extent that the
3205 verification method(s) can provide.

3206 4.3.4.2 Power Setting at Shutdown

3207 The requirement shall be verified by analysis, laboratory test, ground test and flight test
3208 consistent with JSSG-2007C, A.4.2.2.4 Stopping. The requirement shall be successfully verified
3209 when the Government confirms the full content of the requirement is met to the extent that the
3210 verification method(s) can provide.

3211 4.3.5 Stall-Free Operation

3212 The requirement shall be verified by analysis, laboratory test, ground test and flight test
3213 consistent with JSSG-2007C, A.3.2.2.11 Inlet airflow distortion and A.4.2.2.11 Inlet airflow
3214 distortion. The requirement shall be successfully verified when the Government confirms the
3215 full content of the requirement is met to the extent that the verification method(s) can provide.

3216 4.3.6 Thrust Control

3217 The requirement shall be verified by analysis, laboratory test, ground test and flight test. The
3218 requirement shall be successfully verified when the Government confirms the full content of the
3219 requirement is met to the extent that the verification method(s) can provide.

3220 4.3.7 Thrust Transients

3221 The requirement shall be verified by analysis, laboratory test, ground test and flight test
3222 consistent with JSSG-2007C, A.4.2.2.7 Transients. The requirement shall be successfully
3223 verified when the Government confirms the full content of the requirement is met to the extent
3224 that the verification method(s) can provide.

3225 4.3.8 Thrust Stability, Droop and Overshoot

3226 The requirement shall be verified by analysis, laboratory test, ground test and flight test
3227 consistent with JSSG-2007C, A.4.2.2.6 Stability. The requirement shall be successfully verified
3228 when the Government confirms the full content of the requirement is met to the extent that the
3229 verification method(s) can provide.

3230 4.3.9 Thrust Demand and Retention

3231 The requirement shall be verified by analysis, laboratory test, ground test and flight test
3232 consistent with JSSG-2007C, A.4.2.1.4 Performance Retention. The requirement shall be
3233 successfully verified when the Government confirms the full content of the requirement is met to
3234 the extent that the verification method(s) can provide.

3235 4.3.10 Engine Fire/Overheat Indication

3236 The requirement shall be verified by analysis, laboratory test and ground test. The analysis shall
3237 show the design provides the required capability. The laboratory test shall show that the system
3238 *components* are qualified to perform the capability. The ground tests shall show that the system
3239 operates as designed. The requirement shall be successfully verified when the Government
3240 confirms the full content of the requirement is met to the extent that the verification method(s)
3241 can provide.

3242 4.3.11 Engine Design Service Life

3243 The requirement shall be verified by inspection, analysis and ground test. *Design service life*
3244 requirements shall be verified to ensure the desired levels of damage tolerance, durability,
3245 functional capability, operability, performance, reliability, and strength are attained by
3246 accomplishment of Accelerated Mission Testing. The requirement shall be successfully verified

3247 when the Government confirms the full content of the requirement is met to the extent that the
3248 verification method(s) can provide.

3249 **4.3.11.1 Hot Parts Design Service Life**

3250 The requirement shall be verified by analysis and ground test. A sensitivity analysis shall be
3251 conducted (on selected hot parts) to identify the effect on parts lives that result from a range of
3252 usage parameters (above and below the design points). Failure modes (e.g., LCF, creep, stress
3253 rupture) analyses shall be conducted to establish design stress levels and lives for engine hot
3254 parts based on the design usage. Usage parameters to be considered in the sensitivity analysis
3255 shall include airspeed, altitude, ambient temperature, partial throttle cycles, and dwell times at
3256 minimum and maximum power levels. Verification of hot part lives can be attained as part of
3257 the required mission endurance testing. Pass/fail criteria (i.e., allowable post-test part condition)
3258 shall be established for all hot parts life testing. Pass/fail criteria for hot parts life testing shall be
3259 quantified through definition of the post-test condition in terms of dimensional tolerances and
3260 wear limits. The requirement shall be successfully verified when the Government confirms the
3261 full content of the requirement is met to the extent that the verification method(s) can provide.

3262 **4.3.11.2 Cold Parts Design Service Life**

3263 The requirement shall be verified by analysis and ground test. A sensitivity analysis shall be
3264 conducted (on selected cold parts) to identify the effect on parts lives which results from a range
3265 of usage parameters (above and below the design points). Failure modes (e.g., LCF, HCF, creep)
3266 analyses shall be conducted by the contractor to establish design stress levels and lives for engine
3267 cold parts based on the design usage. Usage parameters to be considered in the sensitivity
3268 analysis shall include airspeed, altitude, ambient temperature, partial throttle cycles, and dwell
3269 times at minimum and maximum power levels. Verification of cold part lives can be attained as
3270 part of the required mission endurance testing. Verification of cold parts lives shall also be
3271 accomplished via the other verifications in damage tolerance, LCF, strength, etc. Pass/fail
3272 criteria (i.e., allowable post-test part condition) shall be established for all cold parts life testing.
3273 Pass/fail criteria for cold parts life testing shall be quantified through definition of the post-test
3274 condition in terms of dimensional tolerances and wear limits. The requirement shall be
3275 successfully verified when the Government confirms the full content of the requirement is met to
3276 the extent that the verification method(s) can provide.

3277 **4.3.12 Atmospheric Liquid Water Ingestion**

3278 The requirement shall be verified by analysis, inspection, and laboratory test consistent with
3279 JSSG-2007C, A.4.3.2.5 Atmospheric Liquid Water Ingestion. The requirement shall be
3280 successfully verified when the Government confirms the full content of the requirement is met to
3281 the extent that the verification method(s) can provide.

3282 **4.3.13 Bird Ingestion**

3283 The requirement shall be verified by analysis, inspection, and laboratory test consistent with
3284 JSSG-2007C, A.4.3.2.1 Bird Ingestion. The requirement shall be successfully verified when the
3285 Government confirms the full content of the requirement is met to the extent that the verification
3286 method(s) can provide.

3287 4.3.14 Distortion Intensity Levels

3288 The requirement shall be verified by analysis, and flight test. Distortion intensity levels shall be
3289 defined in accordance with SAE ARP1420B methodology, as defined in the PSIP Master Plan.
3290 SAE AIR 1419B and SAE ARP 1420B methodology shall be used to perform stability audits
3291 throughout the operational envelope. The requirement shall be successfully verified when the
3292 Government confirms the full content of the requirement is met to the extent that the verification
3293 method(s) can provide.

3294 4.3.15 Damage Tolerance

3295 The requirement shall be verified by analysis and laboratory test. Analysis, tests, process
3296 documentation, and quality control during production and assembly shall be accomplished IAW
3297 MIL-STD-3024 and the PSIP Plan. The requirement shall be successfully verified when the
3298 Government confirms the full content of the requirement is met to the extent that the verification
3299 method(s) can provide.

3300 4.3.16 Ice Ingestion

3301 The requirement shall be verified by analysis, inspection, and laboratory test consistent with
3302 JSSG-2007C, A.4.3.2.3 Ice Ingestion. The requirement shall be successfully verified when the
3303 Government confirms the full content of the requirement is met to the extent that the verification
3304 method(s) can provide.

3305 4.3.17 Sand and Dust Ingestion

3306 The requirement shall be verified by analysis, inspection, and laboratory test consistent with
3307 JSSG-2007C, A.4.3.2.4 Sand and Dust Ingestion. The test will be considered satisfactorily
3308 completed when the requirement has been met and the teardown inspection reveals no *failure* or
3309 evidence of impending *failure*.

3310 4.4 Vehicle Subsystems

3311 No requirement to verify.

3312 4.4.1 Fuel Subsystem

3313 No requirement to verify.

3314 4.4.1.1 Pressure Refuel and Defuel

3315 The requirement shall be verified by ground demonstration.

3316 4.4.1.2 Gravity Refuel and Defuel

3317 The requirement shall be verified by ground demonstration.

3318 4.4.1.3 Fuel Transfer

3319 The requirement shall be verified by analysis, ground test and flight test. The automatic usable
3320 fuel transfer requirement shall be verified by ground test and flight test. The *aircraft* gross

3321 weight and center of gravity requirement shall be verified by analysis, ground test and flight test.
 3322 The requirement shall be successfully verified when the Government confirms the full content of
 3323 the requirement is met to the extent that the verification method(s) can provide.

3324 **4.4.2 Aerial Refueling Subsystem Growth Path (Receiver)**

3325 The requirement shall be verified by analysis and flight test. The analysis shall include a
 3326 detailed description of the subsystem and interfaces. It shall show where the proposed location
 3327 of installed receptacle is and how the "future" receptacle installation will comply with NATO
 3328 ATP 3.3.4.5, Section II. The analysis will also describe, based upon that proposed location, the
 3329 following:

- a. How the boom operator's visibility (during day/night operations) of the receptacle and its surrounding area will be adequate from the receiver's pre-contact to contact position.
- 3330 b. How the noise levels created by the boom transitioning to/from the contact position will
 3331 be adequate.
- 3332 c. How the boom path to/from contact position will not impact the *aircraft's* flight control
 3333 system, engine, and other subsystems.
- 3334 d. How any fuel spray at boom-receptacle contact/disconnect will not create a hazard.
- 3335 e. How each aircrew will be capable of monitoring the information provided by the tanker's
 3336 PDLs from the pre-contact position to the contact position and when connected,
 3337 throughout the tanker boom system's disconnect envelope.
- 3338 f. What the boom path will be to achieve a contact.
 - 3339 1) What the clearance from the boom/ice shield and any part of the receiver will be
 3340 when the boom is following this path.
 - 3341 2) How the boom *handling qualities* will be adequate when following this path.
- 3342 g. How much of the tanker's boom disconnect envelope can be utilized.
- 3343 h. What the clearance from the boom/ice shield and any part of the receiver will be when
 3344 the boom is in the receptacle and the receiver is positioned within the "utilized" boom
 3345 disconnect envelope.
- 3346 i. How the *aircraft* will have adequate power and *handling qualities* to proceed from pre-
 3347 contact to contact positions.
- 3348 j. How the tanker's *handling qualities* will be adequate during the AR process with the
 3349 *aircraft*.
- 3350 k. What exterior lights on the *aircraft* will be added/redesigned to achieve a night AR
 3351 capability.
- 3352 l. What antennae on the *aircraft* will be added/re-located.
- 3353 m. How personnel egress will not be impacted by the receptacle installation (including if
 3354 receptacle door fails to fully close).
- 3355 n. How crew visibility during landing will not be impacted if the receptacle door fails to
 3356 fully close.
- 3357 o. How the *aircraft* will maintain adequate *handling qualities*/flight stability when the AR
 3358 receptacle door fails to fully close.

3359 The analysis shall also identify the type of receptacle (by P/N) planned to be used. It shall
 3360 explain if an existing receptacle is being proposed or whether the development of a new
 3361 receptacle must be accomplished for the proposed design.

3362 The analysis shall show design margins for fuel system, electrical power, hydraulic power,
3363 weight, and cooling when the fully integrated receptacle system is installed. It shall also show
3364 how the existing hydraulic system pressure or power source is adequate for receptacle toggle
3365 latch operation and how the existing hydraulic fluid, if applicable, is compatible for receptacle
3366 operation. It shall include the routing of new hydraulic/fuel/OBIGGS/ECS lines and electrical
3367 wires for the proposed integrated receptacle system modification.

3368 The analysis shall document fuel system impacts to include the following:

- 3369 a. Changes to tank fill rates/sequences during AR.
- 3370 b. Vent system capability to accommodate any fill rate changes and tank overfill scenarios
3371 during AR.
- 3372 c. AR/fuel line proof/burst pressure ratings and identify what existing fuel lines will have to
3373 be replaced.
- 3374 d. Fuel management functions.
- 3375 e. Changes to existing plumbing routing and bracket support.
- 3376 f. Fuel on-load rates to show ability to refuel from 15% fuel capacity to maximum fuel
3377 capacity or to *aircraft's* maximum in-flight gross weight (whichever is least) in less than
3378 8 minutes.

3379 The analysis shall identify the extent of required airframe/structural modifications to account for
3380 the following:

- 3381 a. Loads experienced by receptacle during boom-receptacle aerial refueling.
- 3382 b. New wiring/plumbing runs.
- 3383 c. Inadvertent boom strike loads.
- 3384 d. Relocation of existing *components* and addition of new *components* (including cockpit
3385 displays/controls).

3386 The analysis shall show design/location of modified/added cockpit displays/controls necessary to
3387 conduct AR operations.

3388 The analysis shall show how the *aircraft* will be capable of conducting AR using standard AR
3389 procedures from ATP-3.3.4.2.

3390 The analysis shall identify any changes from the baseline configuration to *aircraft's* Fire Zones
3391 classification and show additions/changes to structural drainage provisions.

3392 The analysis shall show compliance with system maintenance requirements.

3393 The analysis shall show how existing Flight Control software will be adequate for AR operations
3394 or show why a new AR mode will be required in order to be able to conduct AR operations.

3395 The analysis shall identify what other systems will be on during AR operations.

3396 The analysis shall describe how much overlap there is with the *aircraft's* performance envelope
3397 (airspeed/altitude) and the tanker's boom operating envelope (airspeed/altitude). It shall need to
3398 show that an operationally adequate aerial refueling envelope for the *aircraft* and tanker pair will
3399 be probable.

3400 The analysis shall show how the integrated receptacle system design addresses the following
3401 other MIL-HDBK-516 certification issues:

- 3402 a. E3 compatibility
- 3403 b. Communication
- 3404 c. Raised fasteners around receptacle
- 3405 d. Receptacle Markings
- 3406 e. Lightning/static electricity compatibility (receptacle door closed/open)
- 3407 f. Software
- 3408 g. *BIT*
- 3409 h. AR system isolation

3410 The analysis shall show that the *aircraft's* aerial refueling rate (gallons per minute) is adequate to
3411 merit having an AR capability (i.e., refuel rate significantly greater than the *aircraft's* SFC
3412 during AR process).

3413 Flight test shall be up to and including the contact-uncoupled position behind a KC-135 tanker
3414 during day ambient conditions. (Note: A receptacle is not required to accomplish this test.
3415 Temporary receptacle markings will suffice.)

3416 The requirement shall be successfully verified when the Government confirms the full content of
3417 the requirement is met to the extent that the verification method(s) can provide.

3418 **4.4.2.1 Aerial Refueling Subsystem Full Integration (Receiver)**

3419 SEE APPENDIX D.

3420 **4.4.3 Environmental Control Subsystem (ECS)**

3421 The requirement shall be verified by inspection, analysis, ground test and flight test. ECS
3422 analysis shall be conducted to predict cockpit temperatures under the worst case conditions of the
3423 mission profiles outlined in APPENDIX A. These predictions shall be verified by ground test
3424 and flight test with both aircrew members in the cockpit with all avionics operating and during
3425 exposure to the worst case environmental limits. The analysis shall also include a FMECA and
3426 System Hazard Analysis (SHA). The FMECA and SHA shall be verified by applicable FMET in
3427 the laboratory or on the ground or in-flight. The FMECA and SHA shall also be verified by
3428 ground test and flight test. The requirement shall be successfully verified when the Government
3429 confirms the full content of the requirement is met to the extent that the verification method(s)
3430 can provide.

3431 **4.4.3.1 Heating Performance (Cold Soak)**

3432 The requirement shall be verified by ground test. The ground test shall be accomplished as
3433 described in the requirement with both aircrew members in the cockpit and all avionics
3434 operating. The requirement shall be successfully verified when the Government confirms the
3435 full content of the requirement is met to the extent that the verification method(s) can provide.

3436 4.4.3.2 Cooling Performance (Hot Soak)

3437 The requirement shall be verified by ground test. The ground test shall be accomplished as
3438 described in the requirement with both aircrew members in the cockpit and all avionics
3439 operating. The requirement shall be successfully verified when the Government confirms the
3440 full content of the requirement is met to the extent that the verification method(s) can provide.

3441 4.4.3.3 Temperature Range

3442 The requirement shall be verified by flight test. The flight test shall be conducted to verify
3443 cockpit temperatures under the worst case conditions of the mission profiles outlined in
3444 APPENDIX A. The flight test shall be accomplished with both aircrew members in the cockpit
3445 with all avionics operating and during exposure to the worst case environmental limits. The
3446 requirement shall be successfully verified when the Government confirms the full content of the
3447 requirement is met to the extent that the verification method(s) can provide.

3448 4.4.3.4 Temperature Variation

3449 The requirement shall be verified by ground test and flight test. The ground test and flight test
3450 shall be conducted to verify cockpit temperatures under the worst case conditions of ground
3451 operations and the worst case conditions of the mission profiles outlined in APPENDIX A. The
3452 ground test and flight test shall be accomplished with both aircrew members in the cockpit with
3453 all avionics operating and during exposure to the worst case environmental limits. The
3454 requirement shall be successfully verified when the Government confirms the full content of the
3455 requirement is met to the extent that the verification method(s) can provide.

3456 4.4.3.5 ECS Controls

3457 The requirement shall be verified by inspection, ground test and flight test. The inspection shall
3458 include drawings and the *aircraft*. The ground test and flight test shall be conducted to verify
3459 cockpit temperatures can be controlled from both cockpits under the worst case conditions of
3460 ground operations and the worst case conditions of the mission profiles outlined in APPENDIX
3461 A. The requirement shall be successfully verified when the Government confirms the full
3462 content of the requirement is met to the extent that the verification method(s) can provide.

3463 4.4.3.6 ECS Alerts

3464 The requirement shall be verified by analysis, ground test and flight test. The analysis shall
3465 show the design provides the appropriate *alerts*. The ground test shall verify that the aircrew
3466 members receive the proper *alerts* for the injected *failures* described in the requirement. The
3467 flight test shall verify that the aircrew receives the proper *alerts* for any naturally occurring
3468 *failures* described in the requirement. The requirement shall be successfully verified when the
3469 Government confirms the full content of the requirement is met to the extent that the verification
3470 method(s) can provide.

3471 4.4.3.7 Anti -Fog -Frost & -Ice

3472 The requirement shall be verified by ground test and flight test. The ground test and flight test
3473 shall be conducted to verify the canopy and interior surfaces remain free of fog, frost and ice

3474 under the worst case conditions of ground operations and the worst case conditions of the
3475 mission profiles outlined in APPENDIX A. The ground test and flight test shall be accomplished
3476 with both aircrew members in the cockpit with all avionics operating and during exposure to the
3477 worst case environmental limits. The requirement shall be successfully verified when the
3478 Government confirms the full content of the requirement is met to the extent that the verification
3479 method(s) can provide.

3480 **4.4.3.8 Equipment Cooling**

3481 The requirement shall be verified by analysis, ground test up to and including 110° F and flight
3482 test. The ground test and flight test shall be conducted to verify the ECS provides the required
3483 cooling to the avionics *components* while maintaining cockpit pressurization and aircrew cooling
3484 under the worst case conditions of ground operations and the worst case conditions of the
3485 mission profiles outlined in APPENDIX A. The ground test and flight test shall be accomplished
3486 with both aircrew members in the cockpit with all avionics operating and during exposure to the
3487 worst case environmental limits. The provided cooling air shall be measured and shown to be
3488 consistent with equipment design specifications. The requirement shall be successfully verified
3489 when the Government confirms the full content of the requirement is met to the extent that the
3490 verification method(s) can provide.

3491 **4.4.3.9 Alternate Cooling**

3492 The requirement shall be verified by analysis, ground test and flight test. The ground test and
3493 flight test shall be conducted to verify the alternate cooling method provides the required cooling
3494 to the flight critical *components* with a *failure* of the normal cooling method under the worst case
3495 conditions of ground operations and the worst case conditions of the mission profiles outlined in
3496 APPENDIX A. These tests shall be accomplished with both aircrew members in the cockpit
3497 with all flight critical *components* operating at a minimum and during exposure to the worst case
3498 environmental limits. The provided cooling air shall be measured and shown to be consistent
3499 with equipment design specifications. The requirement shall be successfully verified when the
3500 Government confirms the full content of the requirement is met to the extent that the verification
3501 method(s) can provide.

3502 **4.4.3.10 Cockpit Pressurization**

3503 The requirement shall be verified by analysis, ground test and flight test. ECS analysis shall be
3504 conducted to predict cockpit pressures under the worst case conditions of the mission profiles
3505 outlined in APPENDIX A. These predictions shall be verified by ground test and flight test.
3506 The occupied compartment requirements shall be verified by measuring pressures during *aircraft*
3507 ground test and flight test. The requirement shall be successfully verified when the Government
3508 confirms the full content of the requirement is met to the extent that the verification method(s)
3509 can provide.

3510 **4.4.3.11 Air Contamination**

3511 The requirement shall be verified by inspection, analysis, ground demonstration and flight
3512 demonstration. The analysis shall include air sampling of the ECS air collected during ground
3513 engine runs. As a minimum, ten (10) samples shall be collected and analyzed for contamination.
3514 The ground demonstration and flight demonstration shall be conducted to verify the provisions to

3515 shut off all air flow to prevent excessively hot air, smoke, fumes, toxic gases, and other
3516 contaminants from entering the cockpit exist and fresh air ventilation for contaminant and odor
3517 removal is available to each cockpit. The requirement shall be successfully verified when the
3518 Government confirms the full content of the requirement is met to the extent that the verification
3519 method(s) can provide.

3520 **4.4.3.12 Bleed Air Ducting (if utilized)**

3521 The requirement shall be verified by inspection, ground test and flight test. The inspection shall
3522 include drawings and the *aircraft* for the leak detection system. The ground test and flight test
3523 shall verify the capability to shutoff the bleed air, that the ducting can withstand maximum
3524 thermal expansion and the stress of structural deflection during maximum G maneuvers. The
3525 requirement shall be successfully verified when the Government confirms the full content of the
3526 requirement is met to the extent that the verification method(s) can provide.

3527 **4.4.3.13 Moisture Control**

3528 The requirement shall be verified by inspection, ground test and flight test. The ground test and
3529 flight test shall be conducted to verify the moisture control provides the required cooling air to
3530 the forced air cooled equipment under the worst case conditions of ground operations and the
3531 worst case conditions of the mission profiles outlined in APPENDIX A. The ground test and
3532 flight test shall be accomplished with both aircrew members in the cockpit with all forced air
3533 cooled equipment operating and during exposure to the worst case environmental limits. The
3534 provided cooling air shall be measured for condensation and humidity and shown to be
3535 consistent with equipment design specifications and shown to prohibit water and fog from
3536 entering the cockpit. The requirement shall be successfully verified when the Government
3537 confirms the full content of the requirement is met to the extent that the verification method(s)
3538 can provide.

3539 **4.4.4 Braking**

3540 The requirement shall be verified by inspection and ground test. The inspection shall include
3541 drawings and the *aircraft*. The ground test shall be verified through successful takeoff and
3542 landing data verification testing. The requirement shall be successfully verified when the
3543 Government confirms the full content of the requirement is met to the extent that the verification
3544 method(s) can provide.

3545 **4.4.4.1 Parking Brake**

3546 The requirement shall be verified by inspection and ground demonstration. The inspection shall
3547 include drawings and the *aircraft*. The ground demonstration shall verify that the parking brake
3548 can be set and released from the cockpit by the anthropometrically sized aircrew. The
3549 requirement shall be successfully verified when the Government confirms the full content of the
3550 requirement is met to the extent that the verification method(s) can provide.

3551 **4.4.5 Electrical Power Subsystem**

3552 The requirement shall be verified by analysis, inspection, laboratory test, ground test and flight
3553 test. The analysis shall include an Electrical Loads Analysis (ELA), FMECA, and System

3554 Hazard Analysis. The ELA shall be accomplished in accordance with MIL-E-7016 with
3555 Amendment 1. The FMECA and System Hazard Analysis shall be verified by applicable FMET
3556 in the laboratory or on the ground or in flight. The analysis shall also be verified by ground test
3557 and flight test. The ground test and flight test shall be conducted to verify the electrical system
3558 provides the required power to the electrical *components* under the worst case conditions of
3559 ground operations and the worst case conditions of the mission profiles outlined in APPENDIX
3560 A. The ground test and flight test shall be accomplished with both aircrew members in the
3561 cockpit with required electrical *components* operating and during exposure to the worst case
3562 environmental limits. The requirement shall be successfully verified when the Government
3563 confirms the full content of the requirement is met to the extent that the verification method(s)
3564 can provide.

3565 **4.4.5.1 Power Source Switching**

3566 The requirement shall be verified by inspection and ground demonstration. The inspection shall
3567 include drawings and the *aircraft*. The capability of transferring electrical power sources,
3568 including both *aircraft* power to external power and external power to *aircraft* power, shall be
3569 verified by ground demonstration. The requirement shall be successfully verified when the
3570 Government confirms the full content of the requirement is met to the extent that the verification
3571 method(s) can provide.

3572 **4.4.5.2 External Power Compatibility**

3573 The requirement shall be verified by inspection and ground demonstration. The inspection shall
3574 include drawings and the *aircraft*. The capability of the electrical power subsystem to operate
3575 with external power that meets SAE-ARP5015 requirements for ground operation shall be
3576 verified by ground demonstration. The requirement shall be successfully verified when the
3577 Government confirms the full content of the requirement is met to the extent that the verification
3578 method(s) can provide.

3579 **4.4.5.3 External Power Receptacle**

3580 The requirement shall be verified by inspection and ground demonstration. The inspection shall
3581 include drawings and the *aircraft*. The capability of a connector to accept external power for
3582 ground operation and for engine start shall be verified by ground demonstration. The
3583 requirement shall be successfully verified when the Government confirms the full content of the
3584 requirement is met to the extent that the verification method(s) can provide.

3585 **4.4.5.4 Emergency Power**

3586 The requirement shall be verified by analysis, laboratory test and ground demonstration. The
3587 analysis shall be part of the ELA. The laboratory test shall verify the analysis at the *component*
3588 level. The ground demonstration shall show the full system integration and verify the capability
3589 and duration. The requirement shall be successfully verified when the Government confirms the
3590 full content of the requirement is met to the extent that the verification method(s) can provide.

3591 4.4.5.5 Aircraft Start-Up

3592 The requirement shall be verified by inspection and ground demonstration for the multiple start
3593 attempts at 0° F and 110° F. The inspection shall include drawings and the *aircraft*. The
3594 requirement shall be successfully verified when the Government confirms the full content of the
3595 requirement is met to the extent that the verification method(s) can provide.

3596 4.4.5.5.1 External Electrical Power

3597 The requirement shall be verified by ground demonstration. The capability of a connector to
3598 accept external power for ground operation and for engine start shall be verified by ground
3599 demonstration. The requirement shall be successfully verified when the Government confirms
3600 the full content of the requirement is met to the extent that the verification method(s) can
3601 provide.

3602 4.4.5.6 Electrical Wiring Interconnection

3603 The requirement shall be verified by inspection of drawings and the *aircraft*. The requirement
3604 shall be successfully verified when the Government confirms the full content of the requirement
3605 is met to the extent that the verification method(s) can provide.

3606 4.4.6 Hydraulic Subsystem (if utilized)

3607 The requirement shall be verified by analysis, laboratory test, ground test and flight test. The
3608 analysis shall include a FMECA and System Hazard Analysis. The FMECA and System Hazard
3609 Analysis shall be verified by applicable FMET in the laboratory or on the ground or in flight.
3610 The analyses shall also be verified by ground test and flight test. Analysis of steady state and
3611 dynamic performance, *component* qualification tests, full-scale mockup/simulator testing and
3612 ground test/flight test verify hydraulic systems power requirements. A hydraulic simulation
3613 (e.g., iron bird, computer model), capable of performing all normal, back-up and emergency
3614 functions, shall demonstrate adequate system fluid capacity. Acceptable fluid loss levels from
3615 the system shall be verified by the simulation. All combinations of internal and external
3616 environmental conditions within the performance envelope of the *aircraft* (e.g., start up, take off,
3617 flight, weapons delivery, return to base, landing) shall be used for the test verifications. The
3618 requirement shall be successfully verified when the Government confirms the full content of the
3619 requirement is met to the extent that the verification method(s) can provide.

3620 4.4.6.1 Hydraulic System Redundancy

3621 The requirement shall be verified by analysis, laboratory test, ground test and flight test. The
3622 analysis shall include a FMECA and System Hazard Analysis. The FMECA and System Hazard
3623 Analysis shall be verified by applicable FMET in the laboratory or on the ground or in flight.
3624 The analysis shall also be verified by ground test and flight test. The requirement shall be
3625 successfully verified when the Government confirms the full content of the requirement is met to
3626 the extent that the verification method(s) can provide.

3627 4.4.6.2 Hydraulic System Integrity

3628 The requirement shall be verified by analysis, inspection and laboratory test. The analysis shall
3629 include a FMECA and System Hazard Analysis. The FMECA and System Hazard Analysis
3630 shall be verified by applicable FMET in the laboratory. The inspection shall include drawings
3631 and the *aircraft*. The laboratory test shall show integrity at the *component* level. The
3632 requirement shall be successfully verified when the Government confirms the full content of the
3633 requirement is met to the extent that the verification method(s) can provide.

3634 4.5 Crew Systems

3635 No requirement to verify.

3636 4.5.1 Human Performance and Human Engineering

3637 The requirement shall be verified by inspection of the *aircraft* and drawings, ground
3638 demonstration, flight demonstration, laboratory test, ground test and flight test, and by
3639 operational and maintenance task analyses. The requirement shall be successfully verified when
3640 the Government confirms the full content of the requirement is met to the extent that the
3641 verification method(s) can provide.

3642 4.5.2 Cockpit Configuration

3643 The requirement shall be verified through inspection of drawings and flight demonstration. The
3644 requirement shall be successfully verified when the Government confirms the full content of the
3645 requirement is met to the extent that the verification method(s) can provide.

3646 4.5.2.1 Cockpit Commonality

3647 The requirement shall be verified through inspection of drawings and ground demonstration.
3648 The requirement shall be successfully verified when the Government confirms the full content of
3649 the requirement is met to the extent that the verification method(s) can provide.

3650 4.5.3 Cockpit Stowage

3651 The requirement shall be verified by inspection of the *aircraft* and ground demonstration. The
3652 requirement shall be successfully verified when the Government confirms the full content of the
3653 requirement is met to the extent that the verification method(s) can provide.

3654 4.5.4 Safety Devices and Streamers

3655 The ability to safety *components* shall be verified by visual inspection of the *components* with
3656 the safety devices installed. Stowage of safety devices shall be verified by inspection and ground
3657 demonstration. The requirement shall be successfully verified when the Government confirms
3658 the full content of the requirement is met to the extent that the verification method(s) can
3659 provide.

3660 4.5.5 Aircrew Physical Anthropometrics

3661 The requirement shall be verified through multivariate anthropometric ground testing. The
3662 procuring agency shall perform this test. The requirement shall be successfully verified when

3663 the Government confirms the full content of the requirement is met to the extent that the
3664 verification method(s) can provide.

3665 **4.5.6 Anthropometric Accommodation**

3666 Reach to operate all controls and displays, reach and clearance to achieve full operational range
3667 of the rudder, throttle control, brakes, and control stick, and room to allow proper body posture
3668 for ejection shall be verified by multivariate anthropometric testing. Escape and ejection
3669 clearance shall be verified by multivariate anthropometric testing and by testing of the escape
3670 system. Room to allow movement for visual checks and the sufficiency of internal and external
3671 visibility for all flight tasks shall be verified by ground test and flight test. The requirement shall
3672 be successfully verified when the Government confirms the full content of the requirement is met
3673 to the extent that the verification method(s) can provide.

3674 **4.5.7 Cockpit Reach**

3675 The requirement shall be verified through multivariate anthropometric ground testing. The
3676 procuring agency shall perform this test. The requirement shall be successfully verified when
3677 the Government confirms the full content of the requirement is met to the extent that the
3678 verification method(s) can provide.

3679 **4.5.8 Aircrew Workload**

3680 The requirement shall be verified by ground test in a simulated environment and flight test. The
3681 requirement shall be successfully verified when the Government confirms the full content of the
3682 requirement is met to the extent that the verification method(s) can provide.

3683 **4.5.9 Aircrew Alerting**

3684 The requirement shall be verified by inspection, analysis, and laboratory test. The requirement
3685 shall be successfully verified when the Government confirms the full content of the requirement
3686 is met to the extent that the verification method(s) can provide.

3687 **4.5.9.1 Prioritization of Alerts**

3688 The requirement shall be verified by inspection, analysis, and laboratory test. The requirement
3689 shall be successfully verified when the Government confirms the full content of the requirement
3690 is met to the extent that the verification method(s) can provide.

3691 **4.5.9.2 Master Warning/Master Caution**

3692 The requirement shall be verified by inspection. The requirement shall be successfully verified
3693 when the Government confirms the full content of the requirement is met to the extent that the
3694 verification method(s) can provide.

3695 **4.5.9.3 Aural and Visual Alerts**

3696 The requirement shall be verified by inspection, and laboratory test. The requirement shall be
3697 successfully verified when the Government confirms the full content of the requirement is met to
3698 the extent that the verification method(s) can provide.

3699 4.5.9.4 Aural Signals for Warning Alerts

3700 The requirement shall be verified by inspection, and laboratory test. The requirement shall be
3701 successfully verified when the Government confirms the full content of the requirement is met to
3702 the extent that the verification method(s) can provide.

3703 4.5.10 Intercommunications Control System (ICS)

3704 No requirement to verify.

3705 4.5.10.1 External Communication

3706 The requirement shall be verified by inspection, ground demonstration and flight demonstration.
3707 The requirement shall be successfully verified when the Government confirms the full content of
3708 the requirement is met to the extent that the verification method(s) can provide.

3709 4.5.10.2 Aircrew Communication

3710 The requirement shall be verified by inspection, ground demonstration and flight demonstration.
3711 The requirement shall be successfully verified when the Government confirms the full content of
3712 the requirement is met to the extent that the verification method(s) can provide.

3713 4.5.10.3 Ground Communication

3714 The requirement shall be verified by inspection and ground demonstration. The requirement
3715 shall be successfully verified when the Government confirms the full content of the requirement
3716 is met to the extent that the verification method(s) can provide.

3717 4.5.10.4 Radio Attenuation

3718 The requirement shall be verified by inspection, ground demonstration and flight demonstration.
3719 The requirement shall be successfully verified when the Government confirms the full content of
3720 the requirement is met to the extent that the verification method(s) can provide.

3721 4.5.10.5 ICS Stations

3722 The requirement shall be verified by inspection, ground demonstration and flight demonstration.
3723 The requirement shall be successfully verified when the Government confirms the full content of
3724 the requirement is met to the extent that the verification method(s) can provide.

3725 4.5.10.6 ICS Controls

3726 This requirement shall be verified by inspection and ground demonstration. The requirement
3727 shall be successfully verified when the Government confirms the full content of the requirement
3728 is met to the extent that the verification method(s) can provide.

3729 4.5.10.7 Microphone Operations

3730 This requirement shall be verified by inspection, ground demonstration and flight demonstration.
3731 The requirement shall be successfully verified when the Government confirms the full content of
3732 the requirement is met to the extent that the verification method(s) can provide.

3733 4.5.10.8 Aircrew and Ground Personnel Acoustic (Speech) Intelligibility

3734 The requirement shall be verified by ground testing and flight testing using the Modified Rhyme
3735 Test (MRT) in accordance with ANSI/ASA S3.2-2009 using the worst case audio path in an
3736 environment equivalent to worst case cockpit noise under normal operating conditions, including
3737 conditions of maximum operational range (100 NM, or maximum radio range, whichever is
3738 greater) for voice communications. The requirement shall be successfully verified when the
3739 Government confirms the full content of the requirement is met to the extent that the verification
3740 method(s) can provide.

3741 4.5.11 Cockpit Controls

3742 No requirement to verify.

3743 4.5.11.1 Throttle Detent

3744 The requirement shall be verified by inspection, ground demonstration and flight demonstration.
3745 The requirement shall be successfully verified when the Government confirms the full content of
3746 the requirement is met to the extent that the verification method(s) can provide.

3747 4.5.11.1.1 Afterburning Aircraft

3748 The requirement shall be verified by inspection, ground demonstration and flight demonstration.
3749 The requirement shall be successfully verified when the Government confirms the full content of
3750 the requirement is met to the extent that the verification method(s) can provide.

3751 4.5.11.1.2 Non-afterburning Aircraft

3752 The requirement shall be verified by inspection, ground demonstration and flight demonstration.
3753 The requirement shall be successfully verified when the Government confirms the full content of
3754 the requirement is met to the extent that the verification method(s) can provide.

3755 4.5.11.2 Side-Arm (Side Stick) Control Stick Forearm Support

3756 The requirement shall be verified by inspection and multivariate anthropometric ground
3757 demonstration. The requirement shall be successfully verified when the Government confirms
3758 the full content of the requirement is met to the extent that the verification method(s) can
3759 provide.

3760 4.5.11.3 Rudder Control Forces

3761 The requirement shall be verified by analysis and flight test. The requirement shall be
3762 successfully verified when the Government confirms the full content of the requirement is met to
3763 the extent that the verification method(s) can provide.

3764 4.5.11.4 Landing Gear Control

3765 The requirement shall be verified by inspection and flight demonstration. The requirement shall
3766 be successfully verified when the Government confirms the full content of the requirement is met
3767 to the extent that the verification method(s) can provide.

3768 **4.5.11.5 Emergency Controls**

3769 No requirement to verify.

3770 **4.5.11.5.1 Accessibility**

3771 The requirement shall be verified by inspection and ground demonstration. The requirement
3772 shall be successfully verified when the Government confirms the full content of the requirement
3773 is met to the extent that the verification method(s) can provide.

3774 **4.5.11.5.2 Inadvertent Actuation**

3775 The requirement shall be verified by hazard analysis, inspection of the *aircraft*, and ground
3776 demonstration. The requirement shall be successfully verified when the Government confirms
3777 the full content of the requirement is met to the extent that the verification method(s) can
3778 provide.

3779 **4.5.11.5.3 Markings**

3780 The requirement shall be verified by inspection of drawings and *aircraft*. The requirement shall
3781 be successfully verified when the Government confirms the full content of the requirement is met
3782 to the extent that the verification method(s) can provide.

3783 **4.5.12 Interior Finishes, Components and Equipment**

3784 No requirement to verify.

3785 **4.5.12.1 Dimensional Stability**

3786 The requirement shall be verified by analysis. The requirement shall be successfully verified
3787 when the Government confirms the full content of the requirement is met to the extent that the
3788 verification method(s) can provide.

3789 **4.5.12.2 Fire Resistance**

3790 The requirement shall be verified by laboratory test IAW 14 CFR Part 25 Appendix F. The
3791 requirement shall be successfully verified when the Government confirms the full content of the
3792 requirement is met to the extent that the verification method(s) can provide.

3793 **4.5.13 Thermal Contact Hazards**

3794 The requirement shall be verified by ground test. The ground test shall turn on all equipment in
3795 the operational configuration and measure the exposed temperature of all surfaces to ensure that
3796 the thermal contact limits are met. This verification shall be considered successful when the
3797 ground test shows that equipment exposed to personnel have surface temperatures lower than
3798 those specified or are guarded.

3799 **4.5.14 Cockpit Displays**

3800 No requirement to verify.

3801 4.5.14.1 Large Area Display (LAD)

3802 The requirement shall be verified by inspection, ground demonstration, and flight demonstration.
3803 The requirement shall be successfully verified when the Government confirms the full content of
3804 the requirement is met to the extent that the verification method(s) can provide.

3805 4.5.14.1.1 Viewable Area

3806 The requirement shall be verified by inspection. The requirement shall be successfully verified
3807 when the Government confirms the full content of the requirement is met to the extent that the
3808 verification method(s) can provide.

3809 4.5.14.1.2 Configurable Display

3810 The requirement shall be verified by ground demonstration and flight demonstration. The
3811 requirement shall be successfully verified when the Government confirms the full content of the
3812 requirement is met to the extent that the verification method(s) can provide.

3813 4.5.14.1.3 Repeater Mode

3814 The requirement shall be verified by ground demonstration and flight demonstration. The
3815 requirement shall be successfully verified when the Government confirms the full content of the
3816 requirement is met to the extent that the verification method(s) can provide.

3817 4.5.14.1.4 Rear-Cockpit Interface

3818 The requirement shall be verified by analysis, inspection, ground demonstration and flight
3819 demonstration. The requirement shall be successfully verified when the Government confirms
3820 the full content of the requirement is met to the extent that the verification method(s) can
3821 provide.

3822 4.5.14.1.5 Integrated Digital Checklists and Electronic Flight Information

3823 The requirement shall be verified by ground demonstration and flight demonstration. The
3824 requirement shall be successfully verified when the Government confirms the full content of the
3825 requirement is met to the extent that the verification method(s) can provide.

3826 4.5.14.1.6 Situational Awareness Display (SAD)/Navigation Display Presentation

3827 The requirement shall be verified by ground demonstration and flight demonstration. The
3828 requirement shall be successfully verified when the Government confirms the full content of the
3829 requirement is met to the extent that the verification method(s) can provide.

3830 4.5.14.2 Glove Compatibility

3831 The requirement shall be verified by ground demonstration. The requirement shall be
3832 successfully verified when the Government confirms the full content of the requirement is met to
3833 the extent that the verification method(s) can provide.

3834 4.5.14.3 Display Readability

3835 The requirement shall be verified by ground demonstration utilizing a sun lamp capable of
3836 generating the daylight condition. The requirement shall be successfully verified when the
3837 Government confirms the full content of the requirement is met to the extent that the verification
3838 method(s) can provide.

3839 4.5.14.4 Cockpit Display Luminance

3840 The requirement shall be verified by ground test and flight demonstration, that shall involve
3841 taking several measurements from the displays at various intensities throughout each crew
3842 station, under 0 foot candles (fC) ambient conditions, using a photometer or other appropriate
3843 equipment. The requirement shall be successfully verified when the Government confirms the
3844 full content of the requirement is met to the extent that the verification method(s) can provide.

3845 4.5.14.5 Display Quality and Latency

3846 The requirement shall be verified by ground demonstration and flight demonstration in day and
3847 night ambient lighting conditions. The requirement shall be successfully verified when the
3848 Government confirms the full content of the requirement is met to the extent that the verification
3849 method(s) can provide.

3850 4.5.14.6 Head-up Type Display (HTD)

3851 The requirement shall be verified by inspection of drawings and *aircraft*. The requirement shall
3852 be successfully verified when the Government confirms the full content of the requirement is met
3853 to the extent that the verification method(s) can provide.

3854 4.5.14.7 Primary Flight Reference

3855 The requirement shall be verified by shall be verified by inspection endorsement documentation.
3856 The requirement shall be successfully verified when the Government confirms the full content of
3857 the requirement is met to the extent that the verification method(s) can provide.

3858 4.5.14.8 Standby Flight Instrument

3859 The requirement shall be verified by inspection of drawings and *aircraft*. The requirement shall
3860 be successfully verified when the Government confirms the full content of the requirement is met
3861 to the extent that the verification method(s) can provide.

3862 4.5.14.9 Aircraft Clock

3863 The requirement shall be verified by inspection of drawings and *aircraft*. The requirement shall
3864 be successfully verified when the Government confirms the full content of the requirement is met
3865 to the extent that the verification method(s) can provide.

3866 4.5.14.9.1 Stopwatch

3867 The requirement shall be verified by inspection of drawings and *aircraft*. The requirement shall
3868 be successfully verified when the Government confirms the full content of the requirement is met
3869 to the extent that the verification method(s) can provide.

3870 4.5.14.10 Symbology

3871 The requirement shall be verified by inspection. The requirement shall be successfully verified
3872 when the Government confirms the full content of the requirement is met to the extent that the
3873 verification method(s) can provide.

3874 4.5.15 Interior Lighting

3875 The requirement shall be verified by ground demonstration utilizing a sun lamp capable of
3876 generating the daylight condition. The requirement shall be successfully verified when the
3877 Government confirms the full content of the requirement is met to the extent that the verification
3878 method(s) can provide.

3879 4.5.15.1 Night Vision Imaging System (NVIS) Compatibility

3880 NVIS compatibility requirements shall be verified by analysis and ground testing IAW MIL-
3881 STD-3009. The requirement shall be successfully verified when the Government confirms the
3882 full content of the requirement is met to the extent that the verification method(s) can provide.

3883 4.5.15.2 Lighting Uniformity

3884 The requirement shall be verified by laboratory test and ground test. The requirement shall be
3885 successfully verified when the Government confirms the full content of the requirement is met to
3886 the extent that the verification method(s) can provide.

3887 4.5.15.3 Brightness Control

3888 The requirement shall be verified by analysis, ground demonstration, and flight demonstration.
3889 The requirement shall be successfully verified when the Government confirms the full content of
3890 the requirement is met to the extent that the verification method(s) can provide.

3891 4.5.15.4 Glare and Reflections

3892 The requirement shall be verified by analysis, ground demonstration, and flight demonstration.
3893 The requirement shall be successfully verified when the Government confirms the full content of
3894 the requirement is met to the extent that the verification method(s) can provide.

3895 4.5.15.5 Utility/Map light

3896 The requirement shall be verified by inspection. The requirement shall be successfully verified
3897 when the Government confirms the full content of the requirement is met to the extent that the
3898 verification method(s) can provide.

3899 4.5.16 Exterior Lighting

3900 The requirement shall be verified by inspection, ground demonstration, and flight demonstration.
3901 The requirement shall be successfully verified when the Government confirms the full content of
3902 the requirement is met to the extent that the verification method(s) can provide.

3903 4.5.16.1 FAA Interoperability

3904 The requirement shall be verified by inspection, analysis, ground demonstration, and flight
3905 demonstration. The requirement shall be successfully verified when the Government confirms
3906 the full content of the requirement is met to the extent that the verification method(s) can
3907 provide.

3908 4.5.17 Interior and Exterior Visibility

3909 No requirement to verify.

3910 4.5.17.1 Interior Visibility

3911 The requirement shall be verified by inspection, ground demonstration, and flight demonstration.
3912 The requirement shall be successfully verified when the Government confirms the full content of
3913 the requirement is met to the extent that the verification method(s) can provide.

3914 4.5.17.2 Exterior Visibility

3915 The requirement shall be verified by analysis of rectilinear vision plots, inspection, ground
3916 demonstration using anthropometric representative aircrew members, and flight demonstration.
3917 The requirement shall be successfully verified when the Government confirms the full content of
3918 the requirement is met to the extent that the verification method(s) can provide.

3919 4.5.17.2.1 Visibility for Landings

3920 The requirement shall be verified by analysis of rectilinear vision plots, inspection, and flight
3921 demonstration. The requirement shall be successfully verified when the Government confirms
3922 the full content of the requirement is met to the extent that the verification method(s) can
3923 provide.

3924 4.5.18 Aircraft Transparency/Canopy System

3925 The requirement shall be verified by ground demonstration and flight demonstration. The
3926 requirement shall be successfully verified when the Government confirms the full content of the
3927 requirement is met to the extent that the verification method(s) can provide.

3928 4.5.18.1 Transparency Integration with Environmental Conditions

3929 The requirement shall be verified by analysis, ground demonstration and flight demonstration.
3930 The requirement shall be successfully verified when the Government confirms the full content of
3931 the requirement is met to the extent that the verification method(s) can provide.

3932 4.5.18.2 Transparency Shape Compatibility

3933 The requirement shall be verified by multivariate anthropometric ground demonstration. The
3934 requirement shall be successfully verified when the Government confirms the full content of the
3935 requirement is met to the extent that the verification method(s) can provide.

3936 4.5.18.3 Transparency System Thermal Loads

3937 The requirement shall be verified by analysis. The requirement shall be successfully verified
3938 when the Government confirms the full content of the requirement is met to the extent that the
3939 verification method(s) can provide.

3940 4.5.18.4 Canopy Opening Clearance

3941 The requirement shall be verified by ground demonstration of aircrew member ingress/egress for
3942 both aircrew member positions using personnel approximating the anthropometric population
3943 extremes, with gloves and personal equipment on. This shall also include a demonstration of
3944 connection and disconnection from *aircraft* connections (i.e., restraint system, oxygen
3945 connections). The requirement shall be successfully verified when the Government confirms the
3946 full content of the requirement is met to the extent that the verification method(s) can provide.

3947 4.5.18.5 Canopy Actuation (Normal Ingress/Egress)

3948 The requirement shall be verified by inspection of drawings and ground demonstration. The
3949 requirement shall be successfully verified when the Government confirms the full content of the
3950 requirement is met to the extent that the verification method(s) can provide.

3951 4.5.18.6 Manual Canopy Operation

3952 The requirement shall be verified by inspection of drawings and ground demonstration. The
3953 requirement shall be successfully verified when the Government confirms the full content of the
3954 requirement is met to the extent that the verification method(s) can provide.

3955 4.5.18.7 Canopy Latching and Locking

3956 The requirement shall be verified by inspection, analysis and ground demonstration. The
3957 requirement shall be successfully verified when the Government confirms the full content of the
3958 requirement is met to the extent that the verification method(s) can provide.

3959 4.5.18.7.1 Canopy Open Lock

3960 The requirement shall be verified by inspection of the system drawings and by ground
3961 demonstration. The requirement shall be successfully verified when the Government confirms
3962 the full content of the requirement is met to the extent that the verification method(s) can
3963 provide.

3964 4.5.19 Normal Aircraft Entry and Exit

3965 The requirement shall be verified by inspection and ground demonstration on an aircraft using
3966 anthropometric representative aircrew members. The requirement shall be successfully verified
3967 when the Government confirms the full content of the requirement is met to the extent that the
3968 verification method(s) can provide.

3969 4.5.19.1.1 Transparency – Escape System Compatibility

3970 The requirement shall be verified by analysis, demonstration, inspection, laboratory test, and
3971 ground demonstration. The requirement shall be successfully verified when the Government

3972 confirms the full content of the requirement is met to the extent that the verification method(s)
3973 can provide.

3974 **4.5.20 Escape and Egress System**

3975 The requirement shall be verified by inspection of drawings and ground test. The requirement
3976 shall be successfully verified when the Government confirms the full content of the requirement
3977 is met to the extent that the verification method(s) can provide.

3978 **4.5.20.1 Escape System Reliability**

3979 The minimum reliability requirements of the ejection seat and escape system integration shall be
3980 verified by ground demonstration and static and dynamic sled testing using a representative
3981 forebody. Demonstrated Reliability numbers are determined from 22 consecutive successful
3982 ejection tests (includes minimum 8 full system-level integration tests per *aircraft*). The
3983 minimum probability of success for the escape system shall be verified by analysis. The
3984 requirement shall be successfully verified when the Government confirms the full content of the
3985 requirement is met to the extent that the verification method(s) can provide.

3986 **4.5.20.2 Manual Emergency Ground Egress**

3987 The requirement shall be verified by ground demonstration using anthropometric representative
3988 aircrew members. The requirement shall be successfully verified when the Government
3989 confirms the full content of the requirement is met to the extent that the verification method(s)
3990 can provide.

3991 **4.5.20.2.1 Backup Emergency Ground Egress**

3992 The requirement shall be verified by analysis, inspection, and ground test. The requirement shall
3993 be successfully verified when the Government confirms the full content of the requirement is met
3994 to the extent that the verification method(s) can provide.

3995 **4.5.20.3 Escape Path Clearance System**

3996 The requirement shall be verified by inspection, analysis, and ground test. The requirement shall
3997 be successfully verified when the Government confirms the full content of the requirement is met
3998 to the extent that the verification method(s) can provide.

3999 **4.5.20.3.1 Penetrating Injuries**

4000 The requirement shall be verified by ground test through subscale cutting tests of the canopy
4001 material with ballistic witness gel placed under the test sample (inside of canopy location) at a
4002 distance that is representative of the shortest distance between the canopy cutting system and the
4003 neck. The requirement shall be successfully verified when the Government confirms the full
4004 content of the requirement is met to the extent that the verification method(s) can provide.

4005 4.5.20.3.2 Impulse Noise

4006 The requirement shall be verified by ground test. The requirement shall be successfully verified
4007 when the Government confirms the full content of the requirement is met to the extent that the
4008 verification method(s) can provide.

4009 4.5.20.3.3 Thermal Energy Exposure Limits

4010 The requirement shall be verified by static and dynamic sled test. The measurements shall be
4011 made by attaching heat flux sensors to the manikin beneath the standard flight equipment. The
4012 placement of these sensors shall be in areas most likely to be exposed to thermal energy, such as
4013 the upper torso, thighs, arms and head. The thermal flux measurements obtained shall be
4014 analyzed by the procuring organization using the BURNSIM burn depth prediction model
4015 version 3.0.2. The requirement shall be successfully verified when the Government confirms the
4016 full content of the requirement is met to the extent that the verification method(s) can provide.

4017 4.5.20.3.4 Escape Path Clearance Considerations

4018 The requirement shall be verified by analysis, inspection of engineering drawings, ground
4019 demonstration (nonexplosive) and breadboard testing (explosive) of a production or production
4020 representative article. The requirement shall be successfully verified when the Government
4021 confirms the full content of the requirement is met to the extent that the verification method(s)
4022 can provide.

4023 4.5.20.4 External Controls

4024 The requirement shall be verified by inspection of the drawings and ground demonstration. The
4025 requirement shall be successfully verified when the Government confirms the full content of the
4026 requirement is met to the extent that the verification method(s) can provide.

4027 4.5.20.5 Ejection Seat Clearance

4028 The requirement shall be verified by ground test by static pull tests in a production representative
4029 cockpit and canopy frame. Sufficient clearance shall be verified by demonstration during the
4030 static and dynamic sled tests with a production representative cockpit and a canopy frame and
4031 forebody. The requirement shall be successfully verified when the Government confirms the full
4032 content of the requirement is met to the extent that the verification method(s) can provide.

4033 4.5.20.6 Safing of Emergency Controls

4034 The requirement shall be verified by analysis, inspection, and ground demonstration. The
4035 requirement shall be successfully verified when the Government confirms the full content of the
4036 requirement is met to the extent that the verification method(s) can provide.

4037 4.5.20.6.1 Secondary Seat Safety Device

4038 The requirement shall be verified by analysis, inspection, and ground demonstration. The
4039 requirement shall be successfully verified when the Government confirms the full content of the
4040 requirement is met to the extent that the verification method(s) can provide.

4041 4.5.20.7 Manually Initiated Automatic Escape

4042 The requirement shall be verified by analysis, inspection and ground test. The requirement shall
4043 be successfully verified when the Government confirms the full content of the requirement is met
4044 to the extent that the verification method(s) can provide.

4045 4.5.20.7.1 Escape Envelope

4046 The requirement shall be verified by escape system ground testing and analysis. The escape
4047 system envelope shall be determined by computer analysis and tested at selected points with the
4048 static and dynamic sled tests. The computer model shall be refined and verified by test data.
4049 The requirement shall be successfully verified when the Government confirms the full content of
4050 the requirement is met to the extent that the verification method(s) can provide.

4051 4.5.20.7.2 Canopy and Escape Path Clearance

4052 The requirement shall be verified by analysis, inspection of engineering drawings, static tests,
4053 and dynamic sled tests. The Contractor shall conduct the following tests, as applicable, prior to
4054 the system level sled tests:

- 4055 a. For canopy jettison systems, a minimum of two dedicated canopy jettison tests (O/O and
4056 maximum speed).
- 4057 b. For active canopy fracturing systems (e.g., detonation chord, shape charge), a minimum
4058 of three dedicated canopy fracturing tests (O/O, O/O with the canopy heated to simulate
4059 maximum operational conditions of the *aircraft*, and maximum speed).
- 4060 c. For direct penetration through the canopy backup mode (i.e., breakers), a minimum of
4061 two static canopy fracturing tests (O/O and O/O with the canopy heated to simulate
4062 maximum operational conditions).

4063 The requirement shall be successfully verified when the Government confirms the full content of
4064 the requirement is met to the extent that the verification method(s) can provide.

**4065 4.5.20.7.2.1 Ejection through the Canopy (For Transparency Fracturing Systems in
4066 Primary Mode, and Direct Penetration Backup Modes)**

4067 The requirement shall be verified by breadboard ballistic, canopy fracturing ground
4068 demonstration, and static and dynamic system level sled tests. The requirement shall be
4069 successfully verified when the Government confirms the full content of the requirement is met to
4070 the extent that the verification method(s) can provide.

4071 4.5.20.7.3 Aircraft Clearance

4072 The requirement shall be verified by analysis and by static and dynamic sled testing. The
4073 requirement shall be successfully verified when the Government confirms the full content of the
4074 requirement is met to the extent that the verification method(s) can provide.

4075 4.5.20.7.4 Initiation

4076 The requirement shall be verified by ground demonstration and pull tests. The total time from
4077 initiation shall be verified by analysis and ground test. The requirement shall be successfully

4078 verified when the Government confirms the full content of the requirement is met to the extent
4079 that the verification method(s) can provide.

4080 **4.5.20.7.5 Inter-Seat Sequencing**

4081 The requirement shall be verified by breadboard and static and dynamic sled testing. Spatial
4082 separations shall be measured during sled tests and verified by analysis using computer
4083 simulation for the full range of *aircraft* speeds. The requirement shall be successfully verified
4084 when the Government confirms the full content of the requirement is met to the extent that the
4085 verification method(s) can provide.

4086 **4.5.20.7.5.1 Inter-Seat Sequencing Mode Selection (for tandem cockpit configured aircraft)**

4087 The requirement shall be verified by inspection, breadboard, static tests, and dynamic sled tests.
4088 The requirement shall be successfully verified when the Government confirms the full content of
4089 the requirement is met to the extent that the verification method(s) can provide.

4090 **4.5.20.7.5.2 Divergence**

4091 The requirement shall be verified by static and dynamic sled tests. The requirement shall be
4092 successfully verified when the Government confirms the full content of the requirement is met to
4093 the extent that the verification method(s) can provide.

4094 **4.5.20.7.6 Seat Aircrew Separation**

4095 The requirement shall be verified by sled testing. The requirement shall be successfully verified
4096 when the Government confirms the full content of the requirement is met to the extent that the
4097 verification method(s) can provide.

4098 **4.5.20.7.7 Descent Recovery Parachute System**

4099 Recovery parachute qualification shall be verified by test. Descent recovery parachute
4100 requirements for fittings and cross connector straps, and seat aircrew member integration shall be
4101 verified by inspection. Descent recovery parachute provisions and deployment requirements
4102 shall be verified by drop tests, live jump tests, and static and dynamic sled tests. The
4103 requirement shall be successfully verified when the Government confirms the full content of the
4104 requirement is met to the extent that the verification method(s) can provide.

4105 **4.5.20.7.7.1 Recovery Parachute Deployment/Inflation Phase Accelerations**

4106 The requirement shall be verified by drop tests, live jump tests, and static and dynamic sled tests.
4107 The requirement shall be successfully verified when the Government confirms the full content of
4108 the requirement is met to the extent that the verification method(s) can provide.

4109 **4.5.20.7.7.2 Descent Rate – Steady State Phase**

4110 The requirement shall be verified by drop tests, live jump tests, and static and dynamic sled tests.
4111 The requirement shall be successfully verified when the Government confirms the full content of
4112 the requirement is met to the extent that the verification method(s) can provide.

4113 4.5.20.8 Personnel Restraint System

4114 The requirement shall be verified by inspection of production article, flight demonstrations, and
4115 dynamic load tests. The requirement shall be successfully verified when the Government
4116 confirms the full content of the requirement is met to the extent that the verification method(s)
4117 can provide.

4118 4.5.20.8.1 Limb Restraint System

4119 Limb restraint system requirements shall be verified by inspection of production article,
4120 demonstrations, and laboratory tests. Rapid disconnection from the seat (harnesses and limb
4121 restraints) shall be verified by ground demonstration. The requirement shall be successfully
4122 verified when the Government confirms the full content of the requirement is met to the extent
4123 that the verification method(s) can provide.

4124 4.5.20.8.2 Inertia Reel Lock

4125 The requirement shall be verified by ground demonstration, inspection, and ground test and
4126 flight test. The requirement shall be successfully verified when the Government confirms the
4127 full content of the requirement is met to the extent that the verification method(s) can provide.

4128 4.5.20.9 Energetic Materials and Components

4129 The complete *aircraft* escape system energy transmission circuit with all associated *components*
4130 shall be operationally verified by breadboard testing. The explosive and/or propellant devices
4131 shall be verified by destructive testing. Verification testing shall cover all levels: *component*,
4132 subsystem, system and sled testing. The requirement shall be successfully verified when the
4133 Government confirms the full content of the requirement is met to the extent that the verification
4134 method(s) can provide.

4135 4.5.20.9.1 Firing Mechanism

4136 The requirement shall be verified by laboratory test. The requirement shall be successfully
4137 verified when the Government confirms the full content of the requirement is met to the extent
4138 that the verification method(s) can provide.

4139 4.5.20.10 Acceleration Limits

4140 No requirement to verify.

4141 4.5.20.10.1 Acceleration Limits – Catapult Phase

4142 Seat mounted instrumentation shall be used to determine DRI. The requirement shall be verified
4143 by static and dynamic system level sled tests. The requirement shall be successfully verified
4144 when the Government confirms the full content of the requirement is met to the extent that the
4145 verification method(s) can provide.

4146 4.5.20.10.2 Acceleration Limits –Free Flight and Drogue Phase

4147 Seat mounted instrumentation shall be used to determine MDRC. The requirement shall be
4148 verified by static and dynamic system level sled tests. The requirement shall be successfully

4149 verified when the Government confirms the full content of the requirement is met to the extent
4150 that the verification method(s) can provide.

4151 **4.5.20.11 Head Injury – All Phases**

4152 The requirement shall be verified by static and dynamic system level sled tests. The requirement
4153 shall be successfully verified when the Government confirms the full content of the requirement
4154 is met to the extent that the verification method(s) can provide.

4155 **4.5.20.12 Neck Loads - All Phases**

4156 No requirement to verify.

4157 **4.5.20.12.1 Neck Loads – Speeds up to and including 450 KEAS**

4158 The requirement shall be verified static and dynamic system level sled tests. The requirement
4159 shall be successfully verified when the Government confirms the full content of the requirement
4160 is met to the extent that the verification method(s) can provide.

4161 **4.5.20.12.1.1 Neck Loads – Speeds greater than 450 KEAS**

4162 The requirement shall be verified static and dynamic system level sled tests. The requirement
4163 shall be successfully verified when the Government confirms the full content of the requirement
4164 is met to the extent that the verification method(s) can provide.

4165 **4.5.20.13 Environmental Conditions**

4166 The requirement shall be verified by analysis and laboratory test and ground test. The
4167 requirement shall be successfully verified when the Government confirms the full content of the
4168 requirement is met to the extent that the verification method(s) can provide.

4169 **4.5.20.14 Center of Gravity (CG) Envelope**

4170 The requirement shall be verified by analysis and ground test. The requirement shall be
4171 successfully verified when the Government confirms the full content of the requirement is met to
4172 the extent that the verification method(s) can provide.

4173 **4.5.20.15 Stabilization and Deceleration**

4174 The requirement shall be verified by static and dynamic sled tests. The requirement shall be
4175 successfully verified when the Government confirms the full content of the requirement is met to
4176 the extent that the verification method(s) can provide.

4177 **4.5.20.16 Seat Assembly**

4178 The requirement shall be verified by static and dynamic sled tests and by multivariate
4179 anthropometric testing. The requirement shall be successfully verified when the Government
4180 confirms the full content of the requirement is met to the extent that the verification method(s)
4181 can provide.

4182 4.5.20.16.1 Headrest

4183 The requirement shall be verified by static and dynamic sled tests and by multivariate
4184 anthropometric testing. The requirement shall be successfully verified when the Government
4185 confirms the full content of the requirement is met to the extent that the verification method(s)
4186 can provide.

4187 4.5.20.16.2 Canopy Breakers

4188 The configuration and presence of canopy breakers shall be verified by inspection. The
4189 performance of the canopy breakers shall be verified by static and dynamic sled tests. The
4190 requirement shall be successfully verified when the Government confirms the full content of the
4191 requirement is met to the extent that the verification method(s) can provide.

4192 4.5.20.16.3 Cushions

4193 The requirement shall be verified by visual inspection. The requirement shall be successfully
4194 verified when the Government confirms the full content of the requirement is met to the extent
4195 that the verification method(s) can provide.

4196 4.5.20.17 Proof Loads

4197 The requirement shall be verified by laboratory test prior to sled testing. Visual inspection shall
4198 verify there was no permanent deformation. The requirement shall be successfully verified when
4199 the Government confirms the full content of the requirement is met to the extent that the
4200 verification method(s) can provide.

4201 4.5.20.18 Crash Ultimate Loads

4202 The requirement shall be verified by laboratory test of the seat and seat structure. Visual
4203 inspection of the test article shall verify there was no fracture of materials or *failure* of seat
4204 attachments after testing for the defined crash loads. The requirement shall be successfully
4205 verified when the Government confirms the full content of the requirement is met to the extent
4206 that the verification method(s) can provide.

4207 4.5.20.19 Redundancy

4208 The requirement shall be verified by inspection of engineering drawings and operationally
4209 verified by breadboard and static and dynamic sled testing. The requirement shall be
4210 successfully verified when the Government confirms the full content of the requirement is met to
4211 the extent that the verification method(s) can provide.

4212 4.5.20.20 Safety

4213 The requirement shall be verified by analysis, ground demonstration, flight demonstration and
4214 visual inspection. The requirement shall be successfully verified when the Government confirms
4215 the full content of the requirement is met to the extent that the verification method(s) can
4216 provide.

4217 4.5.20.21 Explosive Device Maintainability

4218 The requirement shall be verified by a maintainability analysis. The requirement shall be
4219 successfully verified when the Government confirms the full content of the requirement is met to
4220 the extent that the verification method(s) can provide.

4221 4.5.20.22 Performance Reliability

4222 The requirement shall be verified by laboratory test and analysis. The requirement shall be
4223 successfully verified when the Government confirms the full content of the requirement is met to
4224 the extent that the verification method(s) can provide.

4225 4.5.20.23 Component Life and Change-outs

4226 The requirement shall be verified by a maintainability analysis. The requirement shall be
4227 successfully verified when the Government confirms the full content of the requirement is met to
4228 the extent that the verification method(s) can provide.

4229 4.5.20.24 Cartridge Actuated Devices/Propellant Actuated Devices

4230 The requirement shall be verified by a maintainability analysis. The requirement shall be
4231 successfully verified when the Government confirms the full content of the requirement is met to
4232 the extent that the verification method(s) can provide.

4233 4.5.20.25 Aircraft Integration

4234 The requirement shall be verified by inspection of engineering drawings, ground demonstration,
4235 flight demonstration and static and dynamic sled testing. The requirement shall be successfully
4236 verified when the Government confirms the full content of the requirement is met to the extent
4237 that the verification method(s) can provide.

4238 4.5.20.26 Escape System Installation and Removal

4239 The requirement shall be verified by ground demonstration. The requirement shall be
4240 successfully verified when the Government confirms the full content of the requirement is met to
4241 the extent that the verification method(s) can provide.

4242 4.5.20.27 Specialized Tooling or Machinery

4243 The specialized tooling or machinery requirement shall be verified by inspection. The ejection
4244 seat parachute packing requirement shall be verified by ground demonstration and a
4245 maintainability analysis. The requirement shall be successfully verified when the Government
4246 confirms the full content of the requirement is met to the extent that the verification method(s)
4247 can provide.

4248 4.5.21 Aircrew Flight Equipment and Pilot Personal Protection

4249 No requirement to verify.

4250 4.5.21.1 Personal Flight Equipment Compatibility

4251 The requirement shall be verified by inspection of the *aircraft* and connectors, ground
4252 demonstration, and flight demonstration. The requirement shall be successfully verified when
4253 the Government confirms the full content of the requirement is met to the extent that the
4254 verification method(s) can provide.

4255 4.5.21.2 Anti-G Trouser Pressurized Air Supply

4256 The requirement shall be verified by laboratory test, flight test and flight demonstration. The
4257 requirement shall be successfully verified when the Government confirms the full content of the
4258 requirement is met to the extent that the verification method(s) can provide.

4259 4.5.21.3 Survival Kit Provisions

4260 The requirement shall be verified by inspection of a production survival kit. Automatic and
4261 manual deployment of the survival kit shall be verified by demonstration under operational
4262 conditions (actual or simulated) of descent rate, relative wind and parachute oscillations. The
4263 requirement shall be successfully verified when the Government confirms the full content of the
4264 requirement is met to the extent that the verification method(s) can provide.

4265 4.5.21.4 Personnel Emergency Location Transmitter

4266 The requirement shall be verified by ground demonstration of a production article. The
4267 requirement shall be successfully verified when the Government confirms the full content of the
4268 requirement is met to the extent that the verification method(s) can provide.

4269 4.5.21.5 Aircrew Acoustic Exposure Tolerance

4270 The requirement shall be verified by ground test and flight test. The requirement shall be
4271 successfully verified when the Government confirms the full content of the requirement is met to
4272 the extent that the verification method(s) can provide.

4273 4.5.22 Oxygen System

4274 Physiological compatibility shall be verified by test under standard conditions in a USAF altitude
4275 chamber and by flight test. The breathing system shall undergo safe-to-fly testing prior to
4276 *aircraft* flight testing. Safe-to-fly testing shall be conducted by a Government agency. The test
4277 agency shall prepare the test plan, including success criteria. Prior to testing the test agency shall
4278 coordinate the test plan with the contractor and the aircraft program office. Testing shall be
4279 conducted at OBOGS nominal inlet air pressure and minimum inlet air pressure specification at
4280 altitudes from ground level to the maximum ceiling of the *aircraft*. Unmanned testing phases
4281 shall, as a minimum, include steady-state flow testing at minimum and maximum flows, dynamic
4282 flow testing at peak flows (as noted in Table 4-2), rapid ascent and descent, full range of G
4283 levels, rapid decompression, and the various OBOGS operating modes. Unmanned testing shall
4284 be accomplished at various altitudes while the OBOGS inlet pressure is transitioned from 1)
4285 nominal inlet pressure to loss of inlet pressure; 2) highest expected inlet air pressure to the
4286 minimum specification inlet air pressure and back; and 3) nominal inlet pressure to loss of inlet
4287 pressure and back using durations of 5, 10, 15, 20, 25, and 30 seconds. The test agency shall

4288 prepare a safe-to-fly recommendation and final report (if required) discussing the test
 4289 data/results, pass/fail criteria results, and significant findings. The safe-to-fly recommendation
 4290 shall state the clearance for flight test and state the system maximum ceiling altitude, maximum
 4291 G level and document any anomalies found.

4292
 4293
 4294

Table 4-2, Breathing Simulator Profiles

Profile	Peak Flow (liters/min)	Breathing Rate (breaths/min)	Breath Volume (liters)
1	17	8	0.5
2	90	50	0.6
3	125	40	1.0
4	150	25	2.0
5	188	24	2.5
6	258	50	1.5

4295 Final verification will be satisfied with the issuance of a USAF Flight Test Letter following
 4296 completion of the flight test program. A minimum of 100 flight hours of dedicated or piggy-
 4297 back flight testing shall be conducted. A qualified Government agency shall conduct the flight
 4298 testing. 5 sorties shall be conducted after an aircraft cold soak. Cold soaking shall be defined as
 4299 *aircraft* exposure to below 32 °F for 12 hours prior to flight. The breathing system and air
 4300 source/s (i.e., ECS and secondary air source, if used) shall be instrumented. Samples of the
 4301 OBOGS breathing gas shall be collected during ground engine runs. As a minimum, ten (10)
 4302 samples shall be collected and analyzed. After the 100 hours of dedicated or piggy-back flight
 4303 testing a surveillance program shall be initiated to review OBOGS stored flight data on randomly
 4304 selected flights to assess system performance. If anomalies are found, they shall be reported.
 4305 The goal is to ensure the breathing system and the air source/s maintains acceptable performance
 4306 under flight conditions. The flight testing agency shall prepare a flight test letter and final report
 4307 (if required). The flight test letter shall summarize the results of the flight testing program,
 4308 assess breathing system performance and suitability, and document any anomalies. If anomalies
 4309 are noted, the flight test agency shall assess the impact on system safety and effectiveness when
 4310 the *aircraft* is used in its planned mission role. Oxygen system compatibility shall be verified by
 4311 demonstration of connection mating and decoupling and test of oxygen flow output. The
 4312 contractor shall conduct an oxygen system safety analysis of the compatibility of the life support
 4313 system *components*, including OBOGS, to ensure the *components* are compatible with oxygen at
 4314 the pressures and temperatures of use. The system safety analysis shall include a fire hazard
 4315 analysis and FMECA. The oxygen system hazard analysis, shall verify that no unacceptable and
 4316 no undesirable hazards are contained in the oxygen system. The contractor shall conduct
 4317 qualification testing of the breathing system *components*, including OBOGS, to include
 4318 environmental testing, acceleration, vibration, and electromagnetic interference testing. The
 4319 testing shall comply with MIL-STD-810 but may be tailored to the specific operating conditions.
 4320 The system *components* shall pass qualification testing prior to initiation of safe-to-fly testing.

4321 The requirement shall be successfully verified when the Government confirms the full content of
4322 the requirement is met to the extent that the verification method(s) can provide.

4323 **4.5.22.1 Oxygen Supply Quality**

4324 The requirement shall be verified by analysis, laboratory test, ground test and flight test. See
4325 Oxygen System – Verification. The requirement shall be successfully verified when the
4326 Government confirms the full content of the requirement is met to the extent that the verification
4327 method(s) can provide.

4328 **4.5.22.1.1 Oxygen Mask Pressures**

4329 The requirement shall be verified by analysis, laboratory test, ground test and flight test. See
4330 Oxygen System – Verification. The requirement shall be successfully verified when the
4331 Government confirms the full content of the requirement is met to the extent that the verification
4332 method(s) can provide.

4333 **4.5.22.2 Oxygen Quantity**

4334 The requirement shall be verified by inspection for OBOGS equipped *aircraft*. The requirement
4335 shall be verified by analysis and flight test for LOX or GOX equipped *aircraft*. The requirement
4336 shall be successfully verified when the Government confirms the full content of the requirement
4337 is met to the extent that the verification method(s) can provide.

4338 **4.5.22.3 Uninterrupted Oxygen Supply**

4339 The requirement shall be verified by analysis, laboratory test, ground test and flight test. The
4340 requirement shall be successfully verified when the Government confirms the full content of the
4341 requirement is met to the extent that the verification method(s) can provide.

4342 **4.5.22.3.1 OBOGS Pressure Sensors**

4343 The requirement shall be verified by inspection, laboratory test, ground test and flight test. The
4344 requirement shall be successfully verified when the Government confirms the full content of the
4345 requirement is met to the extent that the verification method(s) can provide.

4346 **4.5.22.4 Emergency Oxygen**

4347 The emergency oxygen requirements shall be verified by analysis, laboratory test, ground test
4348 and flight test. An oxygen consumption analysis shall use multipliers of 1.2 for a single aircrew
4349 member, and 1.1 for safety pressure, making the appropriate consumption adjustments for
4350 altitude. Automatic and manual actuation requirements shall be verified by laboratory test and
4351 flight demonstration. The requirement shall be successfully verified when the Government
4352 confirms the full content of the requirement is met to the extent that the verification method(s)
4353 can provide.

4354 **4.5.22.5 Breathing Regulator**

4355 The requirement shall be verified by laboratory test and flight demonstration. The laboratory test
4356 shall include qualification and performance tests. The flight demonstration shall verify operation

4357 and functionality throughout the flight envelope (see Oxygen System – Verification). The
4358 requirement shall be successfully verified when the Government confirms the full content of the
4359 requirement is met to the extent that the verification method(s) can provide.

4360 **4.5.22.6 Oxygen System Controls and Displays**

4361 The requirement shall be verified by inspection of the *aircraft* and ground demonstration
4362 showing that the location and operation of the controls and display are forward of and can be
4363 seen by a seated aircrew member. The requirement shall be successfully verified when the
4364 Government confirms the full content of the requirement is met to the extent that the verification
4365 method(s) can provide.

4366 **4.5.22.7 Oxygen System Integration**

4367 The requirement of oxygen systems design considerations shall be verified by analysis,
4368 inspections, ground demonstration, flight demonstration, laboratory test, ground test and flight
4369 test (See Oxygen System – Verification). Design considerations specified shall be provided at
4370 the preliminary and critical design reviews. Tests shall be required to validate the hazard
4371 analysis. The requirement shall be successfully verified when the Government confirms the full
4372 content of the requirement is met to the extent that the verification method(s) can provide.

4373 **4.5.22.8 Pressure Breathing for G (PBG) Loading**

4374 The requirement shall be verified by inspection, laboratory test and flight test. The inspection
4375 shall include drawings and the *aircraft* for the PBG system. The laboratory test shall verify the
4376 fail-safe operation. The flight test shall verify the capability to provide the G loading mask
4377 pressures during maximum G maneuvers. The requirement shall be successfully verified when
4378 the Government confirms the full content of the requirement is met to the extent that the
4379 verification method(s) can provide.

4380 **4.5.22.9 Breathing Gas Contamination Limits**

4381 The requirement for no toxic or corrosive materials in the system shall be verified by inspection
4382 of the system drawings and documentation. The level of potential contamination shall be
4383 assessed during the safety and verification analysis. New contaminants discovered during
4384 sample analysis, shall be identified and reported to the Program Management Office. See
4385 Oxygen System – Verification. The requirement shall be successfully verified when the
4386 Government confirms the full content of the requirement is met to the extent that the verification
4387 method(s) can provide.

4388 **4.5.22.10 OBOGS Monitoring**

4389 The *BIT* requirement shall be verified by laboratory test and ground test, to include fault
4390 insertion to verify proper operation and identification. The maintenance download requirement
4391 shall be verified by ground demonstration at the *aircraft*. The requirement shall be successfully
4392 verified when the Government confirms the full content of the requirement is met to the extent
4393 that the verification method(s) can provide.

4394 4.5.23 Ground Personnel/Maintenance Specific Considerations

4395 No requirement to verify.

4396 4.5.23.1 Ground Personnel Acoustic Exposure Tolerance

4397 The requirement shall be verified by ground test. The requirement shall be successfully verified
4398 when the Government confirms the full content of the requirement is met to the extent that the
4399 verification method(s) can provide.

4400 4.5.23.2 Maintainer Lifting and Carrying Limits

4401 The requirement shall be verified by maintenance analysis. The requirement shall be
4402 successfully verified when the Government confirms the full content of the requirement is met to
4403 the extent that the verification method(s) can provide.

4404 4.6 Embedded Training

4405 The requirement shall be verified by ground demonstration and flight demonstration. The
4406 ground demonstration shall consist of demonstrating the *Embedded Training* capability off-
4407 aircraft. The flight demonstration shall consist of demonstrating the *Embedded Training*
4408 capability in-flight. The verification shall be considered successful when the ground
4409 demonstration and flight demonstration show that the *Embedded Training* capability
4410 requirements, as defined in section 3.6 and subparagraphs, are satisfied.

4411 (Note: Off-aircraft means in an aircraft-equivalent environment using actual *aircraft*
4412 systems/subsystems/*components*.)

4413 4.6.1 Radar System Simulation

4414 No requirement to verify.

4415 4.6.1.1 Radar Functions and Modes

4416 The requirement shall be verified by ground demonstration and flight demonstration. The
4417 ground demonstration shall consist of demonstrating the radar functionality, modes and display
4418 presentations off-aircraft. The flight demonstration shall consist of demonstrating the radar
4419 functionality, modes and display presentations in-flight. The verification shall be considered
4420 successful when the ground demonstration and flight demonstration show that the radar
4421 functionality, modes and display presentations requirements, as defined in Table 3-21, are
4422 satisfied.

4423 4.6.1.2 Air-to-Ground Function

4424 The requirement shall be verified by ground demonstration and flight demonstration. The
4425 ground demonstration shall consist of demonstrating the radar air-to-ground capability off-
4426 aircraft using ground *constructive targets*. The flight demonstration shall consist of
4427 demonstrating the radar air-to-ground capability using ground *constructive targets*. The
4428 verification shall be considered successful when the ground demonstration and flight
4429 demonstration show that the radar air-to-ground capability is provided.

4430 4.6.1.3 Air-to-Air Function

4431 The requirement shall be verified by ground demonstration and flight demonstration. The
4432 ground demonstration shall consist of demonstrating the radar air-to-air capability off-aircraft
4433 using airborne *constructive targets*. The flight demonstration shall consist of demonstrating the
4434 radar air-to-air capability using *live targets*, *virtual targets* (if *GBTS* Connectivity is
4435 implemented) and airborne *constructive targets*. This verification shall be considered successful
4436 when the ground demonstration and flight demonstration show that the radar air-to-air capability
4437 is provided.

4438 4.6.1.4 Synthetic Aperture Radar (SAR) Ground Mapping

4439 The requirement shall be verified by ground demonstration and flight demonstration. The
4440 ground demonstration shall consist of demonstrating the SAR ground mapping capability off-
4441 aircraft. The flight demonstration shall consist of demonstrating the SAR ground mapping
4442 capability in-flight. The verification shall be considered successful when the ground
4443 demonstration and flight demonstration show that the SAR ground mapping capability is
4444 provided.

4445 4.6.1.5 Target Information

4446 The requirement shall be verified by ground demonstration and flight demonstration. The
4447 ground demonstration shall consist of verifying the radar display presentation provides the target
4448 information defined in Table 3-22. The flight demonstration shall consist of verifying the radar
4449 display presentation provides the target information defined in Table 3-22 using *live targets*,
4450 *virtual targets* (if *GBTS* Connectivity is implemented) and *constructive targets*. The verification
4451 shall be considered successful when the ground demonstration and flight demonstration show
4452 that the specified target information is provided.

4453 4.6.1.6 Radar Detection

4454 The requirement shall be verified by ground demonstration and flight demonstration. The
4455 ground demonstration and flight demonstration shall consist of mission planning the target
4456 detection ranges using JMPS and verifying that the targets are detected IAW the specified
4457 probability of detection rules. The verification shall be considered successful when the ground
4458 demonstration and flight demonstration show that the specified capability is provided.

4459 4.6.1.6.1 Variable Tactical Environment

4460 The requirement shall be verified by ground demonstration and flight demonstration. The
4461 ground demonstration and flight demonstration shall consist of mission planning the detection
4462 profiles using JMPS and verifying that the targets are detected IAW the aircrew-selected
4463 detection profile. The ground demonstration and flight demonstration shall exercise all specified
4464 profiles. The verification shall be considered successful when the ground demonstration and
4465 flight demonstration show that the specified capability is provided.

4466 4.6.1.7 Radar Controls

4467 The requirement shall be verified by ground demonstration and flight demonstration. The
4468 ground demonstration shall consist of interacting with the radar using non-HOTAS radar
4469 controls. The flight demonstration shall consist of interacting with the radar using non-HOTAS
4470 radar controls. The verification shall be considered successful when the ground demonstration
4471 and flight demonstration show the non-HOTAS radar controls are provided.

4472 4.6.1.8 Hands on Throttle and Stick (HOTAS)

4473 The requirement shall be verified by ground demonstration and flight demonstration. The
4474 ground demonstration shall consist of interacting with the radar using *HOTAS controls*. The
4475 flight demonstration shall consist of interacting with the radar using *HOTAS controls*. The
4476 verification shall be considered successful when the ground demonstration and flight
4477 demonstration show the *HOTAS controls* are provided.

4478 4.6.2 Defensive Management System (DMS)

4479 No requirement to verify.

4480 4.6.2.1 RWR Detection

4481 The requirement shall be verified by ground demonstration and flight demonstration. The
4482 ground demonstration shall consist of demonstrating (off-aircraft) the RWR detects and display
4483 airborne and ground *constructive threats/targets*. The flight demonstration shall consist of
4484 demonstrating the RWR detects and display airborne and ground, *live targets, virtual targets* (if
4485 *GBTS* Connectivity is implemented) and *constructive targets*. The verification shall be
4486 considered successful when the ground demonstration and flight demonstration show that the
4487 specified RWR detection capability is provided.

4488 4.6.2.2 Threat Display

4489 The requirement shall be verified by ground demonstration and flight demonstration. The
4490 ground demonstration shall consist of verifying (off-aircraft) the DMS threat display presentation
4491 provides the threat information, as defined in Table 3-24, for airborne and ground *constructive*
4492 *threats/targets*. The flight demonstration shall consist of verifying the DMS threat display
4493 presentation provides the threat information, as defined in Table 3-24, for airborne and ground,
4494 *live targets, virtual targets* (if *GBTS* Connectivity is implemented) and *constructive targets*. The
4495 verification shall be considered successful when the ground demonstration and flight
4496 demonstration show that the specified threat information is provided on both LAD and HTD.

4497 4.6.2.3 DMS Controls

4498 The requirement shall be verified by ground demonstration and flight demonstration. The
4499 ground demonstration shall consist of demonstrating (off-aircraft) the specified DMS controls,
4500 modes and functions. The flight demonstration shall consist of demonstrating the specified DMS
4501 controls, modes and functions. The verification shall be considered successful when the ground
4502 demonstration and flight demonstration show the specified DMS controls, modes and functions
4503 are provided.

4504 4.6.2.4 Threat Audio

4505 The requirement shall be verified by ground demonstration and flight demonstration. The
4506 ground demonstration shall consist of verifying (off-aircraft) the DMS threat audio is provided
4507 (audio can be played thru speakers). The flight demonstration shall consist of verifying the DMS
4508 threat audio is provided to the aircrew thru the *ICS*. The verification shall be considered
4509 successful when the ground demonstration and flight demonstration show that the specified
4510 threat audio is provided IAW Table 3-26.

4511 4.6.2.5 Expendables Systems

4512 The requirement shall be verified by ground demonstration and flight demonstration. The
4513 ground demonstration shall consist of mission planning countermeasures dispensing programs
4514 and demonstrating (off-aircraft) the countermeasures dispensing capability (audio can be played
4515 thru speakers). The flight demonstration shall consist of mission planning countermeasures
4516 dispensing programs and demonstrating the countermeasures dispensing capability using a
4517 wingman *aircraft*. The verification shall be considered successful when the ground
4518 demonstration and flight demonstration show that the specified countermeasures dispensing
4519 capability is provided IAW Table 3-27.

4520 4.6.3 Weapon Systems

4521 The requirement shall be verified by ground demonstration and flight demonstration. The
4522 ground demonstration shall consist of mission planning weapons criteria (loadout) and
4523 demonstrating (off-aircraft) weapons employment against airborne and ground *constructive*
4524 *targets* (audio can be played thru speakers). The flight demonstration shall consist of mission
4525 planning weapons criteria (loadout) and demonstrating weapons employment against airborne
4526 and ground, *live targets*, *virtual targets* (if *GBTs* Connectivity is implemented) and *constructive*
4527 *targets*. The verification shall be considered successful when the ground demonstration and
4528 flight demonstration show that the specified weapons employment capability is provided IAW
4529 Table 3-28.

4530 4.6.3.1 No Drop Weapon Scoring (NDWS)

4531 The requirement shall be verified by ground demonstration and flight demonstration. The
4532 ground demonstration shall consist of demonstrating (off-aircraft) the air-to-ground non-guided
4533 weapons employment and scoring capability. The flight demonstration shall consist of
4534 demonstrating the air-to-ground non-guided weapons employment and scoring capability in-
4535 flight. The verification shall be considered successful when the ground demonstration and flight
4536 demonstration show that the specified non-guided weapons employment and scoring capability is
4537 provided.

4538 4.6.4 Embedded Training Presentation Overlays on SAD

4539 The requirement shall be verified by ground demonstration and flight demonstration. The
4540 ground demonstration shall consist of mission planning SAD presentation (overlays) and
4541 demonstrating (off-aircraft) the specified SAD system capability. The flight demonstration shall
4542 consist of mission planning SAD presentation (overlays) and demonstrating the specified SAD
4543 system capability including the presentation of wingman *aircraft* information. The verification

4544 shall be considered successful when the ground demonstration and flight demonstration show
4545 that the specified SAD system capability is provided.

4546 **4.6.5 Tactical Datalink (TDL) System Simulation**

4547 The requirement shall be verified by ground demonstration and flight demonstration. The
4548 ground demonstration shall consist of demonstrating (off-aircraft) the specified TDL system
4549 capability. The flight demonstration shall consist of demonstrating the specified TDL system
4550 capability in-flight. The verification shall be considered successful when the ground
4551 demonstration and flight demonstration show that the specified TDL system capability is
4552 provided.

4553 **4.6.6 Targeting Pod System Simulation**

4554 SEE APPENDIX D.

4555 **4.6.7 Mission Scenario Inputs**

4556 The requirement shall be verified by ground demonstration and flight demonstration. The
4557 ground demonstration shall consist of executing the pre-planned mission scenario and modifying
4558 the scenario real-time by injecting scenario inputs (defined in Table 3-32) from own-ship. The
4559 flight demonstration shall consist of executing the pre-planned mission scenario and modifying
4560 the scenario real-time by injecting scenario inputs from: own-ship, other *aircraft*, *GBTS* (if *GBTS*
4561 Connectivity is implemented) and GSS (if GSS Connectivity is implemented). The verification
4562 shall be considered successful when the ground demonstration and flight demonstration show
4563 that the mission scenario is modified.

4564 **4.6.8 Synchronized Combat Environment**

4565 The requirement shall be verified by ground demonstration and flight demonstration. The
4566 ground demonstration shall consist of demonstrating (off-aircraft) the mission scenario
4567 environment (including scenario inputs) is synchronized between aircrew positions. The flight
4568 demonstration shall consist of demonstrating the mission scenario environment (including
4569 scenario inputs) is synchronized between aircrew positions and between participating *aircraft*,
4570 *GBTS* (if *GBTS* Connectivity is implemented) and GSS (if GSS Connectivity is implemented).
4571 The verification shall be considered successful when the ground demonstration and flight
4572 demonstration show that the mission scenario is synchronized.

4573 **4.6.8.1 Own-ship Position**

4574 The requirement shall be verified by ground demonstration and flight demonstration. The
4575 ground demonstration shall consist of demonstrating (off-aircraft) the mission scenario
4576 environment maintains real-time correlation with own-ship position. The flight demonstration
4577 shall consist of demonstrating the mission scenario environment maintains real-time correlation
4578 with own-ship position during actual flight. The verification shall be considered successful when
4579 the ground demonstration and flight demonstration show that the mission scenario environment
4580 maintains real-time correlation with own-ship position throughout all flight phases and APT
4581 syllabus maneuvers and the mission profiles.

4582 4.6.9 Geographical Area

4583 The requirement shall be verified by ground demonstration. The ground demonstration shall
4584 consist of positioning the own-ship at different point of interests (pre-selected and randomly
4585 selected) throughout the CONUS area and observing the resulting SAR Ground Mapping and
4586 Targeting Pod System (if implemented) imagery of the area at the point of interest. The
4587 verification shall be considered successful when the observed imagery at each point of interest
4588 shows area coverage with no breaks in terrain, features, models or imagery.

4589 4.6.9.1 High Resolution Area

4590 The requirement shall be verified by ground demonstration. The ground demonstration shall
4591 consist of positioning the own-ship at different point of interests (pre-selected and randomly
4592 selected) throughout the CONUS area and observing the resulting SAR Ground Mapping and
4593 Targeting Pod System (if implemented) imagery of the area at the point of interest. The
4594 verification shall be considered successful when the observed imagery satisfies the specified data
4595 resolutions.

4596 4.6.10 Declutter Function

4597 The requirement shall be verified by ground demonstration and flight demonstration. The
4598 ground demonstration shall consist of displaying *Embedded Training* tactical information in
4599 conjunction with (simulated) flight and navigational information on the LAD and HTD and
4600 demonstrating the declutter function. The flight demonstration shall consist of displaying
4601 *Embedded Training* tactical information in conjunction with (actual) flight and navigational
4602 information on the LAD and HTD and demonstrating the declutter function. The verification
4603 shall be considered successful when the ground demonstration and flight demonstration show
4604 that the specified declutter functionality is provided.

4605 4.7 Recorded Aircraft Information

4606 The requirement shall be verified by inspection. The inspection shall consist of inspecting the
4607 recorded data files (for MFOQA, mishap investigation, maintenance and *mission debriefing*) are
4608 in digital format. The verification shall be considered successful when inspection shows the
4609 recorded data is in digital format.

4610 4.7.1 Military Flight Operations Quality Assurance (MFOQA)

4611 No requirement to verify.

4612 4.7.1.1 Recorded Data

4613 The requirement shall be verified by ground demonstration. The ground demonstration shall
4614 consist of recording test mission data in-flight and verifying the specified data is recorded. The
4615 verification shall be considered successful when the specified data is recorded.

4616 4.7.1.1.1 Airframe Tracking

4617 The requirement shall be verified by ground demonstration. The ground demonstration shall
4618 consist of recording test mission data in-flight and verifying the specified data is recorded. The
4619 verification shall be considered successful when the specified data is recorded.

4620 4.7.1.2 Data Retrieval

4621 The requirement shall be verified by ground demonstration. The ground demonstration shall
4622 consist of downloading recorded flight test data using the Government-approved mobile device
4623 or the DTD and decoding the downloaded data. The verification shall be considered successful
4624 when the downloaded data is decoded.

4625 4.7.2 Mishap Investigation Data

4626 No requirement to verify.

4627 4.7.2.1 Aircraft Recorded Data

4628 The requirement shall be verified by ground demonstration. The ground demonstration shall
4629 consist of recording cockpit audio and flight data in-flight and verifying the specified audio and
4630 data are recorded. The verification shall be considered successful when the specified cockpit
4631 audio and the specified flight data are recorded.

4632 4.7.2.1.1 Crash Survivable Recorder(s)

4633 The requirement shall be verified by ground demonstration and inspection. The ground
4634 demonstration shall consist of downloading recorded cockpit audio and flight data from flight
4635 test and verifying the specified recording capacity for the recorder(s). The inspection shall
4636 consist of inspecting the *aircraft* for the presence of the recorder(s) and inspecting the TSO
4637 compliance documentation issued by the data recorder(s) manufacturer(s). The verification shall
4638 be considered successful when the specified recording capacity and TSO compliance
4639 documentation are provided.

4640 4.7.2.2 Data Retrieval

4641 The requirement shall be verified by ground demonstration. The ground demonstration shall
4642 consist of downloading recorded cockpit audio and flight data from recorder(s), and decoding the
4643 downloaded data. The verification shall be considered successful when it is shown that the
4644 recorded data is downloaded without recorder(s) removal and the downloaded data is decoded.

4645 4.7.2.3 Ejection Seat Recorded Data

4646 The requirement shall be verified by ground demonstration. The demonstration shall consist of
4647 recording the specified data during ejection seat ground testing. The verification shall be
4648 considered successful when the specified data is recorded and it is shown that the recorded data
4649 is downloaded and decoded.

4650 4.7.3 Maintenance Data

4651 No requirement to verify.

4652 4.7.3.1 Recorded Data

4653 The requirement shall be verified by ground demonstration. The ground demonstration shall
4654 consist of recording the specified data in-flight and retrieving the recorded data from a single
4655 point on the *aircraft* using a Government-approved mobile device. The ground demonstration
4656 shall include retrieving the recorded data stored in one *aircraft* after 18 hours of operation. When
4657 in-flight recording of data parameters (e.g., *components* faults) is not practical, then laboratory
4658 test shall be an acceptable method of verification. The verification shall be considered
4659 successful when the specified data is recorded.

4660 4.7.3.1.1 CBM+ Function

4661 The requirement shall be verified by ground test and analysis. The requirement shall be
4662 successfully verified when the Government confirms the full content of the requirement is met to
4663 the extent that the verification method(s) can provide.

4664 4.7.3.2 Aircraft Turn Data Viewing

4665 The requirement shall be verified by ground demonstration. The ground demonstration shall
4666 consist of viewing the recorded data (from 4.7.3.1) in the cockpit and at the *aircraft* using a
4667 Government-approved mobile device. The verification shall be considered successful when the
4668 demonstration successful shows viewing of the specified data.

4669 4.7.3.3 End of Fly Day Data Retrieval

4670 The requirement shall be verified by ground demonstration. The ground demonstration shall
4671 consist of retrieving the recorded data stored in one *aircraft* after 18 hours of operation. The
4672 verification shall be considered successful when the ground demonstration shows retrieval of the
4673 recorded data from a single point on the *aircraft* using a Government-approved mobile device.

4674 4.7.3.4 Maintenance Data Collection & Management System

4675 The requirement shall be verified by ground demonstration. The demonstration shall consist of
4676 demonstrating the transfer of recorded data to IMDS and CEMS using an XML format. The
4677 demonstration shall be considered successful when the specified data is transferred to IMDS and
4678 CEMS.

4679 4.7.4 Mission Debrief Data

4680 No requirement to verify.

4681 4.7.4.1 Recorded Data

4682 The requirement shall be verified by ground demonstration. The demonstration shall consist of
4683 retrieving the recorded data from flight using the DTD and playing back the recorded data using
4684 the intended mission debriefing system. The verification shall be considered successful when
4685 demonstration shows mission and flight reconstruction without distortion (*readable*).

4686 4.7.4.1.1 Bookmarks

4687 The requirement shall be verified by ground demonstration. The demonstration shall consist of
4688 retrieving the recorded data from flight using the DTD and playing back the recorded data using
4689 the intended mission debriefing system. Recorded data shall include manual *bookmarks* and
4690 automatic *bookmarks* for all specified mission events. The verification shall be considered
4691 successful when demonstration shows manual *bookmarks* and automatic *bookmarks* were
4692 recorded.

4693 4.7.4.2 Data Retrieval

4694 The requirement shall be verified by ground demonstration. The demonstration shall consist of
4695 retrieving the recorded data from flight using the DTD and playing back the recorded data using
4696 the intended mission debriefing system. The verification shall be considered successful when
4697 demonstration shows mission and flight reconstruction without distortion (*readable*).

4698 4.7.4.3 Data Quality

4699 The requirement shall be verified by ground demonstration. The demonstration shall consist of
4700 retrieving the recorded data (audio and video) from flight using the DTD and playing back the
4701 recorded data using the intended mission debriefing system. The verification shall be considered
4702 successful when demonstration shows mission and flight reconstruction without distortion
4703 (*readable*) and audio playback is intelligible.

4704 4.8 Product Support

4705 No requirement to verify.

4706 4.8.1 Operational Availability (Ao)

4707 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
4708 analysis shall consist of a validated Logistics Composite Model (LCOM) simulation model using
4709 a Government-approved set of ground rules and assumptions. Data collected during laboratory
4710 test, ground test, and flight test will be used to refine and validate input parameters including, but
4711 not limited to, failure rates, repair rates, delay times, crew sizes, support equipment availability,
4712 turn times, etc. The verification shall be considered successful when the analysis, using the
4713 approved model and input data, shows that *Operational Availability* is above the minimum
4714 requirement.

4715 4.8.2 Materiel Availability (Am)

4716 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
4717 analysis shall consist of a validated LCOM simulation model using a Government-approved set
4718 of ground rules and assumptions. Data collected during laboratory test, ground test, and flight
4719 test will be used to refine and validate input parameters including, but not limited to, failure
4720 rates, repair rates, delay times, crew sizes, support equipment availability, turn times, etc. The
4721 verification shall be considered successful when the analysis, using the approved model and
4722 input data, shows that *Materiel Availability* is above the minimum requirement.

4723 4.8.3 Materiel Reliability (Rm)

4724 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
4725 analysis shall consist of a calculation of the system level *Material Reliability* using the assessed
4726 reliability of all *aircraft components*. Data collected during laboratory test, ground test, and
4727 flight test will be used to refine and validate all *component* level reliability assessments. The
4728 verification shall be considered successful when the calculation, using the final reliability
4729 assessment produced after the completion of all planned flight testing, shows that *Material*
4730 *Reliability* is above the minimum requirement with 80% confidence.

4731 4.8.4 Mean Time Between Failures (MTBF)

4732 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
4733 analysis shall consist of a calculation of the system level *MTBF* using the assessed reliability of
4734 all *aircraft components*. Data collected during laboratory test, ground test, and flight test will be
4735 used to refine and validate all *component* level reliability assessments. The verification shall be
4736 considered successful when the calculation, using the final reliability assessment produced after
4737 the completion of all planned flight testing, shows that *MTBF* is above the minimum requirement
4738 with 80% confidence.

4739 4.8.5 Fix Rate

4740 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
4741 analysis shall consist of a validated LCOM simulation model using a Government-approved set
4742 of ground rules and assumptions. Data collected during laboratory test, ground test, and flight
4743 test will be used to refine and validate input parameters including, but not limited to, failure
4744 rates, repair rates, delay times, crew sizes, support equipment availability, maintenance
4745 manpower, etc. The verification shall be considered successful when the analysis, using the
4746 approved model and input data, shows that *Fix Rate* is above the minimum requirement.

4747 4.8.6 Mean Time Between Maintenance (MTBM)

4748 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
4749 analysis shall consist of a calculation of the system level *MTBM* using the assessed reliability of
4750 all *aircraft components*. Data collected during laboratory test, ground test, and flight test will be
4751 used to refine all *component* level reliability assessments. The verification shall be considered
4752 successful when the calculation, using the final reliability assessment produced after the
4753 completion of all planned flight testing, shows that *MTBM* is above the minimum requirement
4754 with 80% confidence.

4755 4.8.7 Mean Time To Repair (MTTR)

4756 The requirement shall be verified by analysis, laboratory test, ground test, and flight test. The
4757 analysis shall consist of a calculation of the system level *MTTR* using the assessed reliability and
4758 maintainability of all *aircraft components*. Maintenance data collected during laboratory test,
4759 ground test, and flight test will be used to refine and validate all *component* level reliability and
4760 maintainability assessments. The verification shall be considered successful when the
4761 calculation, using the final reliability and maintainability assessments produced after the

4762 completion of all planned flight testing, shows that *MTTR* is equal to or below the maximum
4763 requirement.

4764 **4.8.8 Turn-Around Time**

4765 The requirement shall be verified by ground demonstration. The demonstration shall consist of
4766 government personnel conducted *aircraft* turns using *aircraft* Technical Orders to accomplish all
4767 tasks. The initial conditions of the system for all servicing tasks during the demonstration shall
4768 be fully depleted. The verification shall be considered successful when the ground
4769 demonstration shows that the turn-around time is less than or equal to the maximum requirement
4770 in three (3) out of five (5) demonstration trials.

4771 **4.8.9 Diagnostics**

4772 No requirement to verify.

4773 **4.8.9.1 Integrated Diagnostics (ID) Percent Fault Detection (PFD) (Critical Faults)**

4774 The requirement shall be verified by ground demonstration and analysis. The requirement shall
4775 be successfully verified when the Government confirms the full content of the requirement is met
4776 to the extent that the verification method(s) can provide.

4777 **4.8.9.2 ID PFD (All Faults)**

4778 The requirement shall be verified by ground demonstration and analysis. The requirement shall
4779 be successfully verified when the Government confirms the full content of the requirement is met
4780 to the extent that the verification method(s) can provide.

4781 **4.8.9.3 ID Percent Fault Isolation (PFI) (Critical Faults)**

4782 The requirement shall be verified by analysis. The analysis shall consist of collecting and
4783 reviewing all *BIT* logs and maintenance data (e.g., maintenance actions, repair actions, aircrew
4784 reported discrepancies) associated with *critical faults* to determine if the fault was isolated to the
4785 correct *LRU/LRM* using *ID* and the fault was corrected. The verification shall be considered
4786 successful when the calculation, using the *BIT* reported faults and maintenance data collected
4787 during all ground and flight operations of the *aircraft*, shows that the *ID PFI* for *critical faults* is
4788 greater than or equal to the minimum requirement.

4789 **4.8.9.4 ID PFI (All Faults)**

4790 The requirement shall be verified by analysis. The analysis shall consist of collecting and
4791 reviewing all *BIT* logs and maintenance data (e.g., maintenance actions, repair actions, aircrew
4792 reported discrepancies) associated with all faults to determine if the fault was isolated to the
4793 correct *LRU/LRM* using *ID* and the fault was corrected. The verification shall be considered
4794 successful when the calculation, using the *BIT* reported faults and maintenance data collected
4795 during all ground and flight operations of the *aircraft*, shows that the *ID PFI* for all faults is
4796 greater than or equal to the minimum requirement.

4797 4.8.9.5 Built-In-Test (BIT) Functions

4798 The requirement shall be verified by laboratory test. The laboratory test shall consist of running
4799 each *BIT* function (*start-up*, *continuous*, and *initiated*) and reviewing the *BIT* log to confirm.
4800 The verification shall be considered successful when test results show (i) *start-up BIT*
4801 automatically begins when power is applied to the *aircraft*; (ii) *continuous BIT* runs without
4802 interruption both on the ground and during flight; and (iii) *initiated BIT* can be run on the ground
4803 only. (Note: This test shall require each subsystem to be in a state of which it believes it is in
4804 flight.)

4805 4.8.9.5.1 BIT Functions Display

4806 The requirement shall be verified by laboratory test. The laboratory test shall consist of fault
4807 injection and reviewing *BIT* logs to verify the proper display of *BIT* faults. The verification shall
4808 be considered successful when the laboratory test and any associated software verification testing
4809 results show that (i) all necessary aircrew notifications are displayed and (ii) the *BIT* displays all
4810 faults to the ground maintenance personnel.

4811 4.8.9.6 Safety Critical (SC) BIT Coverage

4812 The requirement shall be verified by analysis and laboratory test. The analysis shall consist of
4813 conducting and reviewing the FMECA. The verification shall be considered successful when the
4814 analysis shows that all *SC faults* have an associated *BIT* indication. The laboratory test shall
4815 consist of *safety critical fault* injections as defined by the test plan and procedures and agreed to
4816 by the Government. The verification shall be considered successful when the laboratory test and
4817 any associated software verification testing results shows that the *safety critical fault* injections
4818 had *BIT* indications recorded in the *BIT* log.

4819 4.8.9.6.1 BIT PFD (SC Faults)

4820 The requirement shall be verified by analysis. The analysis shall consist of collecting and
4821 reviewing all *BIT* logs and maintenance data (e.g., maintenance actions, repair actions, aircrew
4822 reported discrepancies) from all test and demonstration events to determine if *SC faults* were
4823 detected correctly. The verification shall be considered successful when the calculation, using
4824 the *BIT* reported faults collected during all test and demonstration events, shows that the *BIT*
4825 *PFD* for *SC faults* is greater than or equal to the minimum requirement.

4826 4.8.9.6.2 BIT PFI (SC Faults)

4827 The requirement shall be verified by analysis. The analysis shall consist of collecting and
4828 reviewing all *BIT* logs and maintenance data (e.g., maintenance actions, repair actions, aircrew
4829 reported discrepancies) from all test and demonstration events to determine if *SC faults* were
4830 isolated to the correct LRU/LRM. The verification shall be considered successful when the
4831 calculation, using the *BIT* reported faults and repair data collected during all test and
4832 demonstration events, shows that the *BIT PFI* for *SC faults* is greater than or equal to the
4833 minimum requirement.

4834 4.8.9.7 BIT PFD (All Faults)

4835 The requirement shall be verified by analysis. The analysis shall consist of collecting and
4836 reviewing all *BIT* logs and maintenance data (e.g., maintenance actions, repair actions, aircrew
4837 reported discrepancies) from all test and demonstration events to determine if the faults were
4838 detected correctly. The verification shall be considered successful when the calculation, using
4839 the *BIT* reported faults collected during all test and demonstration events, shows that the *BIT*
4840 *PF*D for all faults is greater than or equal to the minimum requirement.

4841 4.8.9.8 BIT PFI (All Faults)

4842 The requirement shall be verified by analysis. The analysis shall consist of collecting and
4843 reviewing all *BIT* logs and maintenance data (e.g., maintenance actions, repair actions, aircrew
4844 reported discrepancies) associated with faults to determine if the fault was isolated to the correct
4845 *LRU/LRM*. The verification shall be considered successful when the calculation, using the *BIT*
4846 reported faults and repair data collected during all test events, shows that the *BIT PFI* for all
4847 faults is greater than or equal to the minimum requirement.

4848 4.8.10 Mean Flight Hours Between Sortie Aborting False Alarms (MFHBSAFA)

4849 The requirement shall be verified by ground test and flight test. Maintenance data collected
4850 during ground test and flight test will be used to calculate *MFHBSAFA*; to include all *sortie*
4851 *aborting false alarms* that result in a sortie abort (air and ground). The verification shall be
4852 considered successful when the calculation, maintenance data collected during ground test and
4853 flight test, shows that *MFHBSAFA* is above the minimum requirement.

4854 4.8.11 Mean Flight Hours Between False Alarms (MFHBFA)

4855 The requirement shall be verified by ground test and flight test. Maintenance data collected
4856 during ground test and flight test will be used to calculate *MFHBFA*; to include all *false alarms*
4857 (air and ground). The verification shall be considered successful when the calculation,
4858 maintenance data collected during ground test and flight test, shows that *MFHBFA* is above the
4859 minimum requirement.

4860 4.8.12 Nameplates and Product Marking

4861 The requirement shall be verified by inspection. The inspection shall consist of reviewing
4862 technical documentation (e.g., drawings) and hardware to verify proper marking. The
4863 verification shall be considered successful when the inspection shows that the hardware is
4864 marked with nameplates and product identification markings, to include Item Unique
4865 Identification, IAW MIL-STD-130 and MIL-STD-129.

4866 4.8.13 Maintenance Concept

4867 The requirement shall be verified by inspection. The inspection shall consist of reviewing
4868 Technical Orders to determine if the scope of work identified corresponds to the USAF two-level
4869 maintenance concept with limited *I-Level* capability. The verification shall be considered
4870 successful when the inspection shows that the scope of work identified in all Technical Orders is
4871 appropriate for the defined maintenance concept.

4872 4.8.13.1 Propulsion System Sustainability

4873 The requirement shall be verified by inspection and ground demonstration. The inspection shall
4874 consist of reviewing *aircraft* Technical Order documentation. The verification shall be
4875 considered successful when the inspection shows that all engine *O-level* maintenance is
4876 accomplished with engine(s) installed on the *aircraft*. The ground demonstration shall consist of
4877 performing *O-level* engine maintenance tasks in accordance with *aircraft* Technical Orders
4878 procedures. The verification shall be considered successful when the ground demonstration
4879 shows that all maintenance tasks have been completed successfully with the engine installed on
4880 *aircraft*.

4881 4.8.13.2 Engine Start System Sustainability

4882 The requirement shall be verified by inspection and ground demonstration. The inspection shall
4883 consist of reviewing *aircraft* Technical Order documentation. The verification shall be
4884 considered successful when the inspection shows that engine start unit(s) is maintainable at the
4885 *O-level*. The ground demonstration shall consist of performing *O-level* engine start unit
4886 maintenance tasks in accordance with *aircraft* Technical Orders procedures. The verification
4887 shall be considered successful when the ground demonstration shows that all maintenance tasks
4888 have been completed successfully at the *O-level*.

4889 4.8.14 Support Equipment (SE)

4890 No requirement to verify.

4891 4.8.14.1 Support Equipment Environment

4892 The requirement shall be verified by inspection, laboratory test and ground demonstration. The
4893 laboratory test shall consist of performing environmental quality testing on SE. This verification
4894 shall be considered successful when it is shown that SE is operable, maintainable, transportable,
4895 and storable under the ground conditions identified in 3.9.1.1 and 3.9.3. The ground
4896 demonstration shall consist of performing the maintenance tasks using SE in accordance with
4897 *aircraft* maintenance procedures. The verification shall be considered successful when the
4898 ground demonstration shows that SE is operable, maintainable, transportable, and storable under
4899 the ground conditions identified in 3.9.1.1 and 3.9.3.

4900 4.8.14.2 Support Equipment/Facility Interfaces

4901 The requirement shall be verified by inspection and ground demonstration. The inspection shall
4902 consist of reviewing technical documentation (e.g., Support Equipment Recommendation Data)
4903 to identify the SE facility power requirements. The verification shall be considered successful
4904 when the inspection shows that the SE facility power requirements are within USAF standards.
4905 The ground demonstration shall consist of performing maintenance tasks using SE in a USAF
4906 facility in accordance with *aircraft* maintenance procedures. The verification shall be considered
4907 successful when the ground demonstration shows that the SE functions appropriately.

4908 4.8.14.3 Aircraft/Support Equipment Interfaces

4909 The requirement shall be verified by inspection and ground demonstration. The inspection shall
4910 consist of reviewing technical documentation (e.g., drawings). The verification shall be
4911 considered successful when the inspection shows that the *aircraft* interface and connection points
4912 meet the standards as listed in Table 3-34. The ground demonstration shall consist of connecting
4913 the *aircraft* to the SE identified in Table 3-34. The verification shall be considered successful
4914 when the ground demonstration shows that the *aircraft* can interface with the SE identified in
4915 Table 3-34.

4916 4.8.15 Maintenance Work Environment

4917 No requirement to verify.

4918 4.8.15.1 Climatic/Environmental Work Conditions

4919 The requirement shall be verified through maintenance task analysis and ground demonstration
4920 of maintenance tasks using the specified anthropometric cases. The requirement shall be
4921 successfully verified when the Government confirms the full content of the requirement is met to
4922 the extent that the verification method(s) can provide.

4923 4.8.15.2 Maintainer Accommodation

4924 The requirement shall be verified through maintenance task analysis and ground demonstration
4925 of maintenance tasks using the specified anthropometric cases. Maintenance task analysis shall
4926 be performed and reported via CDRL to identify critical maintainer tasks/subtasks. Additionally,
4927 tasks considered high risk shall be demonstrated, as necessary, using logical combinations of
4928 anthropometric attributes, or the specified maintainer anthropometric cases, whichever is most
4929 appropriate. Logical combinations of anthropometric attributes, if used, shall be identified
4930 through multivariate analysis of the 2015 USAF Anthropometric Maintainer Database (i.e.,
4931 bivariate plots). The requirement shall be successfully verified when the Government confirms
4932 the full content of the requirement is met to the extent that the verification method(s) can
4933 provide.

4934 4.8.16 Manpower and Personnel

4935 The requirement shall be verified by ground demonstration. The requirement shall be
4936 successfully verified when the Government confirms the full content of the requirement is met to
4937 the extent that the verification method(s) can provide.

4938 4.9 Climatic and Environmental Conditions

4939 The requirement shall be verified by inspection, analysis, laboratory test, ground test and flight
4940 test IAW MIL-STD-810 and MIL-STD-464, and shall include the worst case conditions. The
4941 requirement shall be successfully verified when the Government confirms the full content of the
4942 requirement is met to the extent that the verification method(s) can provide.

4943 4.9.1 Natural Climate

4944 No requirement to verify.

4945 4.9.1.1 Operational Conditions

4946 The requirement shall be verified by laboratory test, ground test, and flight test IAW MIL-STD-
4947 810 and shall include the worst case conditions. The requirement shall be successfully verified
4948 when the Government confirms the full content of the requirement is met to the extent that the
4949 verification method(s) can provide.

4950 4.9.1.2 Environment Condition Lapse Rates for Non-Standard Days

4951 The requirement shall be verified by analysis and flight test. The requirement shall be
4952 successfully verified when the Government confirms the full content of the requirement is met to
4953 the extent that the verification method(s) can provide.

4954 4.9.1.3 Icing Conditions

4955 The requirement shall be verified by flight test. The requirement shall be successfully verified
4956 when the Government confirms the full content of the requirement is met to the extent that the
4957 verification method(s) can provide.

4958 4.9.2 Induced Environment

4959 No requirement to verify.

4960 4.9.2.1 Storage and Transit Conditions

4961 The requirement shall be verified by laboratory test, ground test, and flight test IAW MIL-STD-
4962 810 and shall include the worst case conditions. The requirement shall be successfully verified
4963 when the Government confirms the full content of the requirement is met to the extent that the
4964 verification method(s) can provide.

4965 4.9.2.2 Operating Conditions

4966 The requirement shall be verified by laboratory test, ground test, and flight test IAW MIL-STD-
4967 810 and shall include the worst case conditions. The requirement shall be successfully verified
4968 when the Government confirms the full content of the requirement is met to the extent that the
4969 verification method(s) can provide.

4970 4.9.3 Electromagnetic Environmental Effects (E3)

4971 The electromagnetic environmental effects requirement shall be verified by analysis, inspection,
4972 laboratory test and ground test IAW MIL-STD-464. The requirement shall be successfully
4973 verified when the Government confirms the full content of the requirement is met to the extent
4974 that the verification method(s) can provide.

4975 4.10 Architecture and Security

4976 No requirement to verify.

4977 4.10.1 Critical Program Information

4978 The requirement shall be verified by the method(s) identified in the Verification and Validation
4979 section of the Anti-Tamper Plan (reference SOW paragraph: Anti-Tamper). The requirement
4980 shall be successfully verified when the Government confirms the full content of the requirement
4981 is met to the extent that the verification method(s) can provide.

4982 4.10.2 Cybersecurity

4983 The requirement shall be verified by inspection and laboratory test. The inspection shall consist
4984 of inspecting equipment and wiring to verify the system security architecture installation. The
4985 verification shall be considered successful when the inspection shows that the required
4986 equipment and wiring are as defined in the system security architecture. The laboratory test shall
4987 consist of verifying the *aircraft* systems provide cybersecurity controls listed in the approved
4988 Security Requirements Traceability Matrix (SRTM). The verification shall be considered
4989 successful when the test shows that the required cybersecurity controls are in place.

4990 4.10.3 Open Systems Architecture

4991 The requirement shall be verified by inspection and if applicable by laboratory test. The
4992 inspection shall consist of reviewing various documents (e.g., spreadsheets, drawings and test
4993 reports) as defined in the SOW. The verification shall be considered successful when the
4994 documents show compliance to the “as designed” architecture and allocated requirements to the
4995 LRU/SRU level. If a specific method or standard (e.g., OMS-like) is used in satisfying the *Open*
4996 *Systems Architecture* requirement, then the test report shall show successful compliance in
4997 meeting the method/standard.

4998 4.10.4 Computing Resources

4999 No requirement to verify.

5000 4.10.4.1 Memory Storage

5001 The requirement shall be verified by analysis and ground demonstration. The analysis shall
5002 consist of providing estimates of the overall size of the CONUS navigation and terrain database
5003 supported by the current memory allocation considering data compression and loading
5004 techniques. The verification shall be considered successful when the analysis shows that the
5005 current memory allocation allows for unused memory of at least the amount specified in the
5006 requirement for memory storage. The ground demonstration shall consist of loading all required
5007 databases three successive times (each as a unique allocation). The verification shall be
5008 considered successful when all three successive loads occur without a memory load error.

5009 4.10.4.2 Computer Resources

5010 The requirement shall be verified by analysis and laboratory test. The analysis shall be a worst
5011 case utilization analysis that identifies the worst case operating conditions that maximizes system
5012 utilization of a given embedded computer resource. The analysis shall determine worst case
5013 operating conditions based upon real world conditions that the system could potentially
5014 experience within the system’s expected envelope of operation, including *failure* scenarios that

5015 could occur within that envelope. Testing shall be performed that tests all embedded computer
 5016 resources in the system with test cases that stress a given resource under the specific conditions
 5017 identified in the worst case utilization analysis. The program office shall approve the set of test
 5018 cases that will be utilized to measure resource reserve capacity. The percent of reserve resource
 5019 available shall be calculated as follows:

5020 For a given resource "N"

5021 $\% \text{ Reserve "N"} = ((\text{Total Installed "N"} - \text{Worst Case Utilization "N"}) / \text{Total Installed "N"}) \times 100$

5022 The requirement shall be successfully verified when the Government confirms the full content of
 5023 the requirement is met to the extent that the verification method(s) can provide.

5024

5025 **4.10.4.3 Operational Flight Program (OFP)/Software Item (SI) Versions**

5026 The requirement shall be verified by laboratory test and ground demonstration. The laboratory
 5027 test shall consist of loading the *OFP/SI* and any associated databases and evaluate the load and
 5028 verify capability to ensure that the *OFP/SI* was loaded correctly and displays the version number
 5029 of the *OFP/SI* and any associated databases upon operator command, using appropriate
 5030 groupings of *OFP/SI* and data installed on the *aircraft*, by *Line Replaceable Unit (LRU)* or other
 5031 discriminator. The verification shall be considered successful when each *OFP/SI* version and any
 5032 associated databases are displayed upon operator command, using appropriate groupings of
 5033 *OFP/SI* and data installed on the *aircraft*, by LRU or other discriminator. The ground
 5034 demonstration shall consist of the operator commanding the *OFP/SI* and any associated database
 5035 to be displayed, using appropriate groupings of *OFP/SI* and data installed on the *aircraft*, by
 5036 LRU or other discriminator. The verification shall be considered successful when each *OFP/SI*
 5037 version and any associated databases are displayed upon operator command, using appropriate
 5038 groupings of *OFP/SI* and data installed on the *aircraft*, by LRU or other discriminator.

5039 **4.10.4.4 Operational Flight Program (OFP)/Software Item (SI) Load and Verification**

5040 This requirement shall be verified by laboratory test and ground demonstration. The laboratory
 5041 test shall consist of loading *OFP/SI* and any associated databases on *components*, and then
 5042 corroborating that the *OFP/SI* and any associated databases were loaded correctly. The ground
 5043 demonstration shall consist of loading *OFP/SI* and any associated databases on the *aircraft*, and
 5044 then corroborating that the *OFP/SI* and any associated databases were loaded correctly. This
 5045 verification shall be considered successful when it is shown that each loadable *OFP/SI* and each
 5046 loadable database are individually loaded and verified within 30 minutes.

5047 **4.10.5 ARINC 610 Simulator Compatibility**

5048 The requirement shall be verified by inspection. The inspection shall consist of showing that the
 5049 capability for simulator compatibility is present in the code. The verification shall be considered
 5050 successful when the inspection shows that the design of newly developed *aircraft* equipment and
 5051 software incorporates ARINC 610 simulator compatibility.

5052 **4.11 Utility Attributes**

5053 No requirement to verify.

5054 4.11.1 Fuel Standards

5055 The requirement shall be verified by inspection of drawings and flight demonstration. The fuel
5056 system performance for individual parameters shall be demonstrated with the designated *primary*
5057 *fuel* which is most critical for that parameter. The requirement shall be successfully verified
5058 when the Government confirms the full content of the requirement is met to the extent that the
5059 verification method(s) can provide.

5060 4.11.1.1 Fuel Contaminants

5061 The requirement shall be verified by inspection and flight demonstration. The requirement shall
5062 be successfully verified when the Government confirms the full content of the requirement is met
5063 to the extent that the verification method(s) can provide.

5064 4.11.2 Lubrication Oil Standards

5065 The requirement shall be verified by inspection. The requirement shall be successfully verified
5066 when the Government confirms the full content of the requirement is met to the extent that the
5067 verification method(s) can provide.

5068 4.11.3 Space, Weight, Power and Cooling (SWaP-C) Margins

5069 No requirement to verify.

5070 4.11.3.1 Space

5071 The requirement shall be verified by inspection of drawings and *aircraft*. The requirement shall
5072 be successfully verified when the Government confirms the full content of the requirement is met
5073 to the extent that the verification method(s) can provide.

5074 4.11.3.2 Weight

5075 The requirement shall be verified by inspection and flight demonstration. The inspection shall
5076 consist of inspecting the Weight and Balance documentation. The flight demonstration shall
5077 consist of the verification of the performance requirements (4.1) with ballast installed. The
5078 requirement shall be successfully verified when the Government confirms the full content of the
5079 requirement is met to the extent that the verification method(s) can provide.

5080 4.11.3.3 Power

5081 The requirement shall be verified by inspection. The inspection shall consist of inspecting the
5082 Electrical Load Analysis documentation and inspecting the *aircraft* drawings for electrical
5083 installations. The requirement shall be successfully verified when the Government confirms the
5084 full content of the requirement is met to the extent that the verification method(s) can provide.

5085 4.11.3.4 Cooling

5086 The requirement shall be verified by analysis, inspection, ground test and flight test. The
5087 requirement shall be successfully verified when the Government confirms the full content of the
5088 requirement is met to the extent that the verification method(s) can provide.

5089 4.11.4 Aircraft Maintenance Safety Protection Equipment (MSPE) Stowage

5090 The requirement shall be verified by inspection and ground demonstration. The requirement
5091 shall be successfully verified when the Government confirms the full content of the requirement
5092 is met to the extent that the verification method(s) can provide.

5093 4.11.5 External Stores

5094 The requirement shall be verified by analysis, ground demonstration and flight test. Analysis
5095 shall include all three pods. Ground demonstration and flight test shall include the MXU
5096 Cargo/Travel Pod and Next Generation Cargo Pod. The requirement shall be successfully
5097 verified when the Government confirms the full content of the requirement is met to the extent
5098 that the verification method(s) can provide.

5099 4.11.5.1 Stores Electrical Interfaces

5100 The requirement shall be verified by inspection of drawings and *aircraft*. The requirement shall
5101 be successfully verified when the Government confirms the full content of the requirement is met
5102 to the extent that the verification method(s) can provide.

5103 4.11.6 Environment, Safety and Occupational Health (ESOH)

5104 No requirement to verify.

5105 4.11.6.1 Safety

5106 The requirement shall be verified by analysis, inspection, laboratory test, ground test and flight
5107 test. The analysis shall include a Failure Modes Effect Analysis (FMEA)/FMECA and a System
5108 Hazard Analysis. The FMEA/FMECA and System Hazard Analysis shall be verified by
5109 applicable FMET in the laboratory or on the ground or in flight. The requirement shall be
5110 successfully verified when the Government confirms the full content of the requirement is met to
5111 the extent that the verification method(s) can provide.

5112 4.11.6.2 Federal and State Laws

5113 The requirement shall be verified by analysis and inspection. The requirement shall be
5114 successfully verified when the Government confirms the full content of the requirement is met to
5115 the extent that the verification method(s) can provide.

5116 4.11.6.3 Hazards

5117 The requirement shall be verified by analysis, inspection, laboratory test, ground test and flight
5118 test. The analysis shall include a FMEA/FMECA and a System Hazard Analysis. The
5119 FMEA/FMECA and System Hazard Analysis shall be verified by applicable FMET in the
5120 laboratory or on the ground or in flight. The requirement shall be successfully verified when the
5121 Government confirms the full content of the requirement is met to the extent that the verification
5122 method(s) can provide.

5123 4.11.6.4 Energetic Materials

5124 The requirement shall be verified by analysis, inspection and laboratory test. The requirement
5125 shall be successfully verified when the Government confirms the full content of the requirement
5126 is met to the extent that the verification method(s) can provide.

5127 4.11.6.5 Hazardous Materials (HAZMAT)

5128 The requirement shall be verified by analysis and inspection. The requirement shall be
5129 successfully verified when the Government confirms the full content of the requirement is met to
5130 the extent that the verification method(s) can provide.

5131 4.11.6.6 Air Force Occupational Safety

5132 The requirement shall be verified by analysis, inspection, laboratory test, ground test and flight
5133 test. The analysis shall include a FMEA/FMECA and a System Hazard Analysis. The
5134 FMEA/FMECA and System Hazard Analysis shall be verified by applicable FMET in the
5135 laboratory or on the ground or in flight. The requirement shall be successfully verified when the
5136 Government confirms the full content of the requirement is met to the extent that the verification
5137 method(s) can provide.

5138 4.11.7 Airworthiness Certification

5139 The requirement shall be verified by inspection. The inspection shall consist of inspecting the
5140 airworthiness assessment and determination made by the USAF Technical Airworthiness
5141 Authority (TAA). The verification shall be considered successful when the inspection shows the
5142 TAA approves a Military Type Certificate for APT production and production-representative
5143 *aircraft*.

5144 4.11.8 Geographic Intelligence (GEOINT)

5145 The requirement shall be verified by inspection. The requirement shall be successfully verified
5146 when the Government confirms the full content of the requirement is met to the extent that the
5147 verification method(s) can provide.

5148 4.11.9 Barrier Rollover

5149 The requirement shall be verified by ground demonstration. The requirement shall be
5150 successfully verified when the Government confirms the full content of the requirement is met to
5151 the extent that the verification method(s) can provide.

5152 4.12 Mission Support

5153 The requirement shall be verified by ground demonstration. The ground demonstration shall
5154 consist of executing the required mission support functions on systems that are compatible with
5155 the USAF Standard Desktop Configuration. The requirement shall be successfully verified when
5156 the Government confirms the full content of the requirement is met to the extent that the
5157 verification method(s) can provide.

5158 (Note: In this section and subordinate sections the term “off-aircraft” means in an aircraft-
5159 equivalent environment using actual *aircraft* systems/subsystems/components.)

5160 **4.12.1 Data Transfer**

5161 The requirement shall be verified by ground demonstration. The ground demonstration shall
5162 consist of loading test missions to the *aircraft* subsystems via the on-board data transfer system
5163 and a single DTD and verifying the missions were correctly loaded. The test missions shall be
5164 built and loaded onto the DTD using the JMPS. The verification shall be considered successful
5165 when it is shown that the test missions were loaded.

5166 **4.12.1.1 DTD Design**

5167 The requirement shall be verified by inspection and ground demonstration. The inspection shall
5168 consist of reviewing DTD documentation and verifying the DTD design is commercially-based
5169 and industrial-grade MIL-STD-810 compliant. The ground demonstration shall consist of
5170 recording information on the DTD and verifying the information is protected with the
5171 appropriate level of data encryption. The verification shall be considered successful when it is
5172 shown that the DTD design requirements are satisfied.

5173 **4.12.1.2 On-Board Data Upload**

5174 The requirement shall be verified by ground test. The ground test shall consist of loading test
5175 missions to the *aircraft* subsystems via the data transfer system and a single DTD and verifying
5176 the time to load the test mission (all data required for the mission) is no more than 4 minutes.
5177 The test missions shall be built and loaded onto the DTD using the JMPS. The verification shall
5178 be considered successful when it is shown that the test missions are loaded within the time
5179 specified.

5180 **4.12.1.3 DTD Adapter**

5181 The requirement shall be verified by inspection. The inspection shall consist of inspecting the
5182 DTD Adapter (and documentation) to confirm the presence of the necessary interfaces with
5183 JMPS to load the DTD with mission data from JMPS. The inspection shall also consist of
5184 inspecting the mission debriefing system to confirm the presence of the DTD Adapter. The
5185 verification shall be considered successful when it is shown that DTD Adapters (and
5186 documentation) are provided.

5187 **4.12.2 Mission Planning Interface**

5188 The requirement shall be verified by ground demonstration. The ground demonstration shall
5189 consist of loading test missions to the *aircraft* subsystems via the data transfer system and a
5190 single DTD and verifying the missions were correctly loaded. The test missions shall be built
5191 and loaded onto the DTD using the JMPS. The verification shall be considered successful when
5192 it is shown that the *aircraft* mission planning interface is compatible with JMPS.

5193 **4.12.3 Mission Scenario Generation**

5194 The requirement shall be verified by ground demonstration. The ground demonstration shall
5195 consist of creating, modifying, reviewing, storing, and transferring (to DTD) test mission

5196 scenarios and SAD overlays for *Embedded Training* operations. The ground demonstration shall
5197 also consist of running each newly created or modified test mission scenario off-aircraft and
5198 verifying the mission executes correctly. The mission scenarios shall incorporate up to 20
5199 airborne and ground *constructive targets* each. The *constructive targets* within the scenario shall
5200 include every target type as defined in Table 3-39. The test mission scenarios shall be built and
5201 loaded onto the DTD using the JMPS. The verification shall be considered successful when it is
5202 shown that the Mission Scenario Generation requirements are satisfied.

5203 **4.12.4 Mission Debriefing**

5204 The requirement shall be verified by ground demonstration. The ground demonstration shall
5205 consist of playing back recorded test missions using the intended mission debriefing system.
5206 The test missions shall include single-ship and multi-ship missions recorded off-aircraft and in-
5207 flight. The multi-ship test missions shall include recorded missions from the *GBTS* (if *GBTS*
5208 Connectivity is implemented). The verification shall be considered successful when
5209 demonstration shows the Mission Debriefing requirements are satisfied.

5210 **4.12.4.1 Debriefing Operation**

5211 The requirement shall be verified by ground demonstration. The ground demonstration shall
5212 consist of playing back recorded test missions using the intended mission debriefing system and
5213 verifying the mission replay is complete, correct and accurate. The test missions shall be single-
5214 ship missions recorded off-aircraft and in-flight. The verification shall be considered successful
5215 when demonstration shows the Debriefing Operation requirements are satisfied.

5216 **4.12.4.2 Multi-Ship Debriefing**

5217 The requirement shall be verified by ground demonstration. The ground demonstration shall
5218 consist of playing back recorded test missions using the intended mission debriefing system.
5219 The test missions shall be multi-ship missions recorded in-flight. The multi-ship test missions
5220 shall include recorded missions from the *GBTS* (if *GBTS* Connectivity is implemented). The
5221 verification shall be considered successful when demonstration shows the Multi-Ship Debriefing
5222 requirements are satisfied.

5223 **4.12.4.3 Data Uploading**

5224 The requirement shall be verified by laboratory test. The ground test shall consist of transferring
5225 the recorded test missions from four participating *aircraft* DTDs to the mission debriefing
5226 system within five minutes (combined) using the intended DTD Adapter. Each participating
5227 *aircraft* DTD shall contain all required audio, video and flight data IAW section 3.12.4.1. The
5228 recorded test missions shall be representative of missions that produce the largest amount of
5229 recorded data to be transferred. The ground test shall also cover multi-ship missions between
5230 *aircraft* and *GBTS* (if *GBTS* Connectivity is implemented). The verification shall be considered
5231 successful when it is shown that the test missions are transferred within the specified time.

5232 **4.12.4.4 Data Melding**

5233 The requirement shall be verified by laboratory test. The ground test shall consist of melding the
5234 recorded test missions from eight participating *aircraft* within five minutes (combined) using the

5235 intended mission debriefing system. Each recorded test mission shall contain all required audio,
5236 video and flight data IAW section 3.12.4.1. The recorded test missions shall be representative of
5237 missions that produce the largest amount of recorded data to be melded. The ground test shall
5238 also cover multi-ship missions between *aircraft* and *GBTS* (if *GBTS* Connectivity is
5239 implemented). The verification shall be considered successful when it is shown that the test
5240 missions are melded within the specified time.

5241 **4.12.4.5 Two- and Three-Dimensional Perspective Views**

5242 The requirement shall be verified by ground demonstration. The ground demonstration shall
5243 consist of playing recorded test missions and verifying the two-dimensional and three-
5244 dimensional perspective views. The recorded test missions shall include single-ship and multi-
5245 ship missions. The ground test shall also cover multi-ship missions between *aircraft* and *GBTS*
5246 (if *GBTS* Connectivity is implemented). The verification shall be considered successful when it
5247 is shown that the Two- and Three-Dimensional Perspective Views requirements are satisfied.

5248 **4.12.4.6 Playback Controls**

5249 The requirement shall be verified by ground demonstration. The ground demonstration shall
5250 consist of playing recorded test missions and verifying all required replay controls. The recorded
5251 test missions shall include single-ship and multi-ship missions. The ground test shall also cover
5252 multi-ship missions between *aircraft* and *GBTS* (if *GBTS* Connectivity is implemented). The
5253 verification shall be considered successful when it is shown that the Playback Controls
5254 requirements are satisfied.

5255 **5 PACKAGING**

5256 For acquisition purposes, the packaging requirements shall be as specified in the contract or
5257 order. When actual packing of material is to be performed by DoD personnel, these personnel
5258 need to contact the responsible packaging activity to ascertain requisite packaging requirements.
5259 Packaging requirements are maintained by the Inventory Control Point's packaging activity
5260 within the Military DoD Agency, or within the Military Department's System Command.
5261 Packaging data retrieval is available from the managing Military Department's or Defense
5262 Agency's automated packaging files, CD-ROM products, or by contacting the responsible
5263 packaging activity.

5264 **6 NOTES**5265 **6.1 Acronyms**

AA	Aircraft Availability
AAA	Anti-Aircraft Artillery
ADS-B	Automatic Dependent Surveillance - Broadcast
AESA	Active Electronically Scanned Array
AETC	Air Education and Training Command
AEW	Airborne Early Warning
AFB	Air Force Base
AFFSA	Air Force Flight Standards Agency
AFH	Air Force Handbook
AFPD	Air Force Policy Directive
AFI	Air Force Instruction
AFLCMC	Air Force Life Cycle Management Center
AGL	Above Ground Level
AIS	Abbreviated Injury Scale
AIWG	Aircraft Information Working Group
A _m	Materiel Availability
A _o	Operational Availability
AOA	Angle-of-Attack
APT	Advanced Pilot Training
APU	Auxiliary Power Unit
ARINC	Aeronautical Radio Incorporated
ATP	Allied Tactical Publication
ATR	Air Transport Radio
BFM	Basic Fighter Maneuvers
BIT	Built-In Test
C	Celsius
CAS	Close Air Support
CC	Common Components
CCIP	Constantly Computed Impact Point
CCRP	Constantly Computed Release Point
CG	Center of Gravity
CNS/ATM	Commercial Navigation System/Air Traffic Management
CONUS	Continental United States
CVR	Cockpit Voice Recorder

DA	Density Altitude
D-Level	Depot-Level
DME	Distance Measuring Equipment
DMS	Defensive Management System
DOD	Department of Defense
DoDI	Department of Defense Instruction
DOF	Degree of Freedom
DTD	Data Transfer Device
DTED	Digital Terrain Elevation Data
E3	Electromagnetic Environmental Effects
ECS	Environmental Control System
EEGS	Enhanced Envelope Gun Sight
EMD	Engineering Manufacturing Development
EW	Early Warning
F	Fahrenheit
F/B	Fighter/Bomber
FAA	Federal Aviation Administration
FDR	Flight Data Recorder
fC	Foot Candles
FMC	Fully Mission Capable
FMEA	Failure Modes Effect Analysis
FMECA	Failure Modes, Effects, and Criticality Analysis
GBTS	Ground Based Training System
GCI	Ground Control Intercept
GEOINT	Geospatial-Intelligence
GHz	Gigahertz
GPS	Global Positioning System
GSS	Ground Support Station
HAZMAT	Hazardous Materials
HOTAS	Hands-On Throttle and Stick
HTD	Head-up Type Display
Hz	Hertz
IAT	Individual Aircraft Tracking
IAW	In Accordance With
ICS	Intercommunication System
ID	Integrated Diagnostics
IFF	Introduction to Fighter Fundamentals

IFR	Instrument Flight Rules
ILS	Instrument Landing System
IMC	Instrument Meteorological Conditions
IMDS	Integrated Maintenance Data System
JMPS	Joint Mission Planning System
JP	Jet Propellant
JSSG	Joint Service Specification Guide
KEAS	Knots Equivalent Airspeed
KIAS	Knots Indicated Airspeed
KTAS	Knots True Airspeed
L	Laboratory Test
LAD	Large Area Display
LBM/LBF-HR	Pounds of Fuel per Hour-Pound of Thrust
LCOM	Logistics Composite Model
LCOS	Lead Computing Optical Sight
L/ESS	Loads/Environment Spectral Survey
LNAV	Lateral Navigation
LP	Localizer Performance
LPV	Localizer Performance With Vertical Guidance
LRM	Line Replaceable Module
LRU	Line Replaceable Unit
LWC	Liquid Water Content
MC	Mission Capable
MCU	Modular Concept Unit
MFHBFA	Mean Flight Hours Between False Alarms
MFHBSAFA	Mean Flight Hours Between Sortie Aborting False Alarms
MFOQA	Military Flight Operational Quality Assurance
MIL-HDBK	Military Handbook
MIL-PRF	Military Performance
MIL-STD	Military Standard
MHz	Megahertz
MOA	Military Operating Area
MPE	Mission Planning Environment
MRT	Modified Rhythm Test
MTBF	Mean Time Between Failures
MTBM	Mean Time Between Maintenance
MTTR	Mean Time To Repair

NATO	North Atlantic Treaty Organization
NGA	National Geospatial-Intelligence Agency
NM	Nautical Mile
NVIS	Night Vision Imaging System
OBOGS	On-Board Oxygen Generating System
ODS	Ozone Depleting Substances
OFP	Operational Flight Program
OFT	Operational Flight Trainer
O-Level	Organizational-Level
OMS	Open Mission Systems
PA	Pressure Altitude
PFD	Percent of Fault Detection
PFI	Percent of Fault Isolation
PIO	Pilot-in-the-loop Oscillations
PMC	Partially Mission Capable
QPA	Quantity per Application
RBGM	Real Beam Ground Map
RCR	Runway Condition Reading
R _m	Materiel Reliability
RNAV	Area Navigation
RNP	Required Navigation Performance
ROSH	Region of Satisfactory Handling
RVSM	Reduced Vertical Separation Minima
RWR	Radar Warning Receiver
SA	Situational Awareness
SAM	Surface-to-Air Missile
SAR	Synthetic Aperture Radar
SE	Support Equipment
SHA	System Hazard Analysis
SC	Safety Critical
SI	Software Item
SIF	Selective Identification Feature
SOW	Statement of Work
SRD	System Requirements Document
SRTM	Security Requirements Traceability Matrix
SSEWG	System Security Engineering Working Group
STT	Single Target Track

SUPT	Specialized Undergraduate Pilot Training
SVR	System Verification Review
SWaP-C	Space, Weight, Power and Cooling
t	Flight Demonstration
TA	Target Acquisition
TAA	Technical Airworthiness Authority
TACAN	Tactical Air Navigation
TCAS	Traffic Collision and Avoidance System
TDL	Tactical Datalink
TO	Technical Order
TSO	Technical Standard Order
TWS	Track While Scan
UF	Usage Factor
U.S.	United States
UHF	Ultra High Frequency
UPC	Unique Planning Component
USAF	United States Air Force
UTD	Unit Training Device
VAC	Volts Alternating Current
VCRM	Verification Cross Reference Matrix
V _G	Gust Limit Speed
V _H	Level Flight Maximum Speed
VHF	Very High Frequency
V _L	Limit Speed
VMC	Visual Meteorological Conditions
VMF	Variable Message Format
VNAV	Vertical Navigation
VOR	Very High Frequency Omni-directional Radio-range
WSSP	Weapon Systems Support Pod
WST	Weapon System Trainer
WUC	Work Unit Code
XML	Extensible Markup Language

5266 6.2 Definitions

Term	Definition
Abbreviated Injury Scale 2	The Abbreviated Injury Scale was developed by Association for Advancement of Automobile Medicine. The AIS Scale is a used for ranking injury severity and represents the “threat to life” associated with a single traumatic injury. An AIS code of 2, as described in this document as “AIS 2,” is defined as "moderate" on a scale of 1-6 with 1 being "minor" and 6 being "maximal (currently untreatable)." Examples of AIS 2 injuries include head concussion with brief loss of consciousness, shoulder, knee, hip joint dislocations and most simple type bone fractures. Reference: Abbreviated Injury Scale 2005, Update 2008 by Association for the Advancement of Automotive Medicine, Barrington, IL.
Absolute Ceiling	It is the highest altitude at which the maximum steady-state rate-of-climb potential is 0 feet per minute, for a specified configuration, weight, speed, and thrust (power) setting. (MIL-STD-3013)
Advisory	Aircrew <i>alert</i> that visually and/or aurally indicates a safe or normal configuration, condition of performance or operation of essential equipment, or attracts attention and imparts information for routine action purposes.
Aircraft	The air vehicle portion of the APT <i>Aircraft System</i> .
Aircraft System	Air vehicle, all ground support equipment, mission support systems (mission planning, mission scenario generation, and mission debriefing), technical data, and external stores necessary to meet the requirements of this specification. Ground support station (GSS) is included, if GSS Connectivity is implemented.
Alert	Visual or aural or tactile/physical cue that indicates the existence of a <i>warning, caution or advisory</i> condition.
Alternate Fuel	Fuels on which the <i>aircraft</i> can be flown without operational restrictions but which can have long term durability or maintainability impact if used for continuous operation (multiple flights). They are used only on an occasional or intermittent basis. Use will cause no adverse effect on the <i>aircraft</i> mission(s). (JSSG-2001)
Angle-of-Attack	The angle between the true velocity vector projected onto the air vehicle plane of symmetry and the body X-axis as depicted in MIL-STD-3013, Figure 1.
Area Navigation (RNAV)	A method of navigation that permits the <i>aircraft</i> operation on any desired flight path within the coverage of ground or space based navigation aids or within the limits of the capability of self-contained aids, or a combination of these. FAA AC 90-100A provides operational and airworthiness guidance for operation on U.S. Area Navigation (RNAV) airspace.
Anti-Tamper	Measures, techniques, and features intended to prevent and/or delay exploitation of resident <i>Critical Program Information</i> in U.S

	weapon systems.
Basic Weight	It is the <i>weight empty</i> plus all oils, unusable fuel, survival kits, oxygen, ballast, etc. installed.
Basic Flight Design Gross Weight	The highest flight weight required for the maximum positive and minimum negative load factors of maneuvering flight and is specified as the <i>operating weight</i> plus the primary mission payload and fuel weight of 50% (relative to maximum fuel capacity).
Bookmark	A place in the mission recording that, during mission debriefing system playback/review, can be selected as a “go to” or “jump to” position for mission playback. Bookmarks may be created automatically based on various mission events. Bookmarks may also be created manually, as desired by the aircrew.
Built-In Test	Portion of the integrated diagnostic capability that is an integral part of the <i>aircraft</i> . An integral capability of the item which provides an automated test capability to detect, diagnose, and isolate item <i>failures</i> . It includes: <i>Start-up BIT</i> , <i>Continuous BIT</i> and <i>Initiated BIT</i> . (AFGS-87256)
Calm Air	No wind, no turbulence, no gusts, and no shears. (MIL-STD-1797)
Caution	Aircrew <i>alert</i> that visually and/or aurally indicates the existence of a condition requiring immediate attention of the aircrew, but not immediate action.
Cockpit/Crew Resource Management	The effective use of all available resources (people, weapons, sensors, flight instruments, and communications) by individuals or aircrews to safely and efficiently accomplish an assigned mission or task.
Code 3	The <i>aircraft</i> has major discrepancies in <i>mission-essential systems</i> that may require extensive repair or replacement prior to further mission assignment. The discrepancy may not affect safety-of-flight and the <i>aircraft</i> may be NMC flyable.
Cold-Mic	Microphone operating mode where aircrew communications require keying a microphone switch before speaking.
Common Atmospheric Disturbance	Levels of atmospheric disturbances which may be encountered commonly in operations (i.e., probability of exceeding these levels is approximately 1×10^{-2}). (MIL-STD-1797)
Component	A part or combination of parts having a specific function, which can be installed or replaced only as an entity (e.g., a <i>Line Replaceable Unit</i> , a <i>Line Replaceable Module</i> and Group A items).
Constructive Constructive Simulation Constructive Targets Constructive Threats	Models and simulations that involve simulated people operating simulated systems. Real people stimulate (make inputs to) such simulations, but are not involved in determining the outcomes. Synthetic (computer generated) airborne and ground forces that actively participate in the simulated air combat environment.
Continuous Built-In-Test	An <i>aircraft</i> Built-In-Test mode which is non-interruptive that continually monitors item operation for errors.
Critical Faults	<i>Faults</i> that can result in or resulted in <i>Code 3s</i> or ground aborts that require an <i>on-equipment maintenance</i> action. They can be

	hardware or software.
Critical Program Information	Elements or <i>components</i> of a program that, if compromised, could cause significant degradation in mission effectiveness; shorten the expected effective life of the system; reduce technological advantage; significantly alter program direction; or enable an adversary to defeat, counter, copy, or reverse engineer the technology or capability.
Cultural and Natural Features	A feature is a static element of the synthetic (computer generated) environment that exists but does not actively participate in synthetic (computer generated) environment interactions. Cultural features are man-made elements such as roads, buildings, dams, runways, etc. Natural features are elements such as rivers, lakes, mountains, islands, etc.
Dangerous Flight Conditions	A flight condition in which loss of control, loss of the air vehicle, or death or injury to the aircrew is probable. (MIL-STD-1797)
Data Rate	The rate at which a communications link is capable of carrying data, usually measured in bits per second.
Density Altitude	It is defined as <i>Pressure Altitude</i> corrected for nonstandard temperature variations.
Depot-Level Maintenance	Maintenance consisting of those on- and off-equipment tasks performed using the highly specialized skills, sophisticated shop equipment, or special facilities of a supporting command; commercial activity; or inter service agency at a technology repair center, centralized repair facility, or, in some cases, at an operating location. Maintenance performed at a depot may also include organizational or intermediate level maintenance. (AFI 21-101) For example: major overhaul, rebuild of parts, assemblies, and end items, including the manufacture of parts, modification, testing, and reclamation.
Design Service Life	It is the period of time (e.g., years, flight cycles, hours, landings) established at design, during which the structure is expected to maintain its structural integrity when flown to the design loads/environment spectrum. (MIL-STD-1530)
Developed Spin	The phase during which it is possible to identify the spin mode.
Embedded Training	A capability that provides the <i>aircraft system</i> with <i>virtual simulations</i> and <i>constructive simulations</i> of systems, weapons and threats allowing student pilots to build <i>Cockpit/Crew Resource Management</i> proficiency in a simple or complex simulated air combat environment/mission scenario. Pre-planned scenarios are created in pre-flight planning and transferred to the <i>aircraft</i> and/or <i>GBTS</i> . A data link is used to synchronize the combat environment for multi-ship missions (joint training between multiple <i>aircraft</i> (and <i>GBTS</i> components if <i>GBTS</i> Connectivity implemented). Datalink also enables time, space and position information exchanges, real-time kill notifications, and (if GSS Connectivity is implemented) real-time monitoring from the GSS. It allows

	instructor pilots to change the scenario variables in-flight. It also includes on-board mission recording and off-board <i>mission debriefing</i> capabilities which allow the student and instructor to reconstruct the mission for post-flight review.
Emergency Fuel	Fuels which significantly compromises the performance and durability of the <i>aircraft</i> . Use may cause significant damage. Use ought to be limited to one flight and only for emergency evacuation or aerial refueling or countering emergency action. (JSSG-2001)
Escape Path Clearance System	A capability of the <i>aircraft</i> that either removes (jettisons) the canopy or fractures the transparency using an explosive cutting system during either the automated escape sequence or during the emergency ground egress process.
Extraordinary Atmospheric Disturbances	Levels of atmospheric disturbances which may be encountered only under extraordinary circumstances in operations (i.e., probability of exceeding these levels is approximately 1×10^{-5}). (MIL-STD-1797)
Failure	The state of inability of an item to perform its required function; the functional manifestation of a <i>fault</i> . (AFGS-87256)
False Alarm	A <i>fault</i> indicated by <i>BIT</i> or other monitoring device where no <i>fault</i> exists. (AFGS-87256)
Fault	A physical condition that causes an item to not perform in a required or designed manner. (AFGS-87256)
Fault Detection	A process which discovers the existence of <i>faults</i> . (AFGS-87256)
Fault Isolation	Identifying the <i>fault</i> in a unit-under-test (UUT) to the specified <i>fault</i> resolution level of the item. (AFGS-87256) For the purposes of calculating <i>PFI</i> , the specified fault resolution level is to a single <i>LRU/LRM</i> .
Fix Rate	It is a measure of the percentage of <i>aircraft</i> that return as <i>Code 3</i> and must be returned to <i>Mission Capable</i> status within a specified amount of time. The specified time includes direct maintenance time and downtime associated with administrative and logistics delays.
Flying Qualities	The stability and control characteristics that have an important bearing on the safety of flight and on the pilots' impressions of the ease of flying the <i>aircraft</i> in steady flight and in maneuvers.
Ground Based Training System	In the context of this specification, it refers to the Weapon System Trainer (WST) simulator and the Operational Flight Trainer (OFT) simulator.
Gust Limit Speed (V_G)	The maximum authorized speed for continued operation in turbulent air.
Handling Characteristics Handling Qualities	Those qualities or characteristics of an <i>aircraft</i> that govern the ease and precision with which a pilot is able to perform the tasks required in support of the <i>aircraft's</i> role.
Handoff Mode	During normal operation, system is in floating diamond mode - the diamond automatically moves to highest priority emitter currently detected and composite, new threat, and missile launch audio can

	be heard. Momentarily pressing and releasing HANDOFF button puts system in Alert mode. In this mode, diamond remains floating, but only new guy and ML audio are heard. Pressing and holding HANDOFF button causes diamond to cycle through emitter symbols in descending threat priority order. Releasing HANDOFF button puts system in Latch mode, which causes diamond to stop on current emitter symbol. In this mode, audio of current diamond emitter, new guy audio, and ML audio are heard. Latch mode is indicated by diamond legend being illuminated. Momentarily pressing and releasing the HANDOFF button returns the system to normal Floating Diamond mode. The H indicator legend is illuminated when the RWR is powered on.
Head-up Type Display	Either a head-up display or helmet-mounted display.
High and Low Altitude Priority Modes	Toggles RWR between high and low altitude modes, which changes threat priority selection process.
High Resolution Area	Geo-specific, high feature (cultural and natural) density areas that are inserted into a contiguous, CONUS database. These areas also require high resolution terrain elevation data and high resolution imagery data. Geo-specific: A model used to represent a real-world feature. For example, a geo-specific model for the White House would look exactly like the White House and be used to represent the White House in a database of Washington, D.C.
Hands On Throttle and Stick controls	Unless otherwise stated, it refers to the switches, buttons, and other user input methodologies incorporated into the control stick grips and throttle grips.
Hot-Mic	Microphone operating mode where aircrew communications are enabled by speaking without keying a microphone switch.
Incipient Spin	The initial, transient phase of the motion during which it is not possible to identify the spin mode, usually followed by the <i>developed spin</i> .
Induced Environment	Any man-made or equipment-made environment which directly or indirectly affects the performance of man or <i>component</i> .
Initiated BIT	An <i>aircraft Built-In-Test</i> mode which is that is interruptive and executed only after the occurrence of an action by an element outside the system (operator, fault manager, test equipment, etc.).
Integrated Diagnostics	A structured process that maximizes the effectiveness of diagnostics by integrating pertinent elements, such as <i>Built-In-Test</i> , automatic and manual test/support equipment, maintenance aids, and technical data, as a means for providing a capability to detect and isolate unambiguously all <i>faults</i> known or expected to occur in systems/subsystems/ <i>components</i> in order to satisfy mission requirements. (AFGS-87256)
Intercommunications Control System	An internal communication system that allows connection to external communication sources.

Intermediate-Level Maintenance	Maintenance consisting of those off-equipment tasks normally performed using the resources of the operating command at an operating location or at a centralized intermediate repair facility. (AFI 21-101). Intermediate level maintenance includes but is not limited to off-equipment tasks for systems such as egress, ground/support equipment, structural maintenance, metals technology, non-destructive inspection (NDI), tires and wheels, electro-environmental, hydraulics, <i>aircraft</i> fuels and propulsion.
Interphone	Part of the <i>ICS</i> used for internal <i>aircraft</i> communications only.
Key Components and Interfaces	Those <i>Line Replaceable Units (LRUs)/Line Replaceable Modules (LRMs)</i> , subsystems and interfaces (both internal and external) that define and/or control the Pilot Vehicle Interfaces (PVIs) that are likely to change in the future as a result of Block Upgrades (e.g., corrective, perfective and adaptive changes) or expanded mission/capability (e.g., Red Air, Aerial Refueling).
Landing Design Gross Weight	It is the <i>maximum design gross weight</i> minus all payload items expected to be expended, all external fuel, and 25% internal fuel.
Landing Ground Roll Distance	The horizontal distance to decelerate from touchdown speed to a full stop for the specified weight, altitude, and configuration. Ground roll is divided into two segments - transition and braking. The transition segment is the ground roll that immediately follows touchdown, which allows for the change from the touchdown attitude to the taxi attitude. During transition, the air vehicle is brought from the landing configuration to the braking configuration. (Mil-STD-3013)
Large Area Display	A primary display consisting of a single piece of glass in front of the aircrew.
Latency	The delay between the time the data is sent from its origin and received at its destination. It determines how responsive the link will be.
Level Flight Maximum Speed (V_H)	The maximum authorized continuous level flight speed required and otherwise attainable by the <i>aircraft</i> . The <i>aircraft</i> will not be operated at low-level airspeeds greater than specified for the bird strike capability of the <i>aircraft</i> .
Limit Speed (V_L)	The maximum allowable speed of the <i>aircraft</i> commensurate with operational use considering shallow and steep dive angles, thrust, and inadvertent upsets from gusts.
Light Rime Icing	Icing encountered with liquid water content (LWC) greater than or equal to 0.1 grams/m ³ and less than 0.7 grams/m ³ .
Line Replaceable Module Line Replaceable Unit	An essential <i>component</i> removed and replaced at <i>O-Level</i> to restore an end item to an operationally ready condition.
Link Margin	Ratio of the received signal power to the minimum required by the receiver. (IEEE glossary)
Live Aircraft Live Target Live Threat	A real <i>aircraft</i> participating in a multi-ship training mission.

Local Training Area	It is defined by a 150 NM-radius circle centered on the Main Operating Base/Designated Base (with the exception of Creech AFB where it is defined by a 150 NM-radius semi-circle covering the Nellis Range Complex and centered on Creech AFB) and includes all military operating areas (MOA) and ranges, and the local area instrument routes and visual routes low levels.
Materiel Availability	It is a measure of the percentage of the total inventory of a system operationally capable (ready for tasking) of performing an assigned mission at a given time, based on materiel condition. It provides availability percentages from a USAF corporate, fleet-wide perspective.
Material Reliability	It is a measure of the probability that the system will perform without mission-degrading <i>failure</i> during a scheduled training sortie.
Maximum Design Gross Weight	It is the weight of the <i>aircraft</i> with maximum internal and maximum external load for which provision is required, with no reductions permitted for fuel used during taxi, warmup, or climb-out. This weight applies to: a) Ground maneuvering, ground handling and miscellaneous ground loads. b) Takeoff loads. c) In-flight refueling conditions. d) Flight loads at <i>maximum takeoff gross weight</i> . e) Wheel jacking. (For wing and fuselage jacking, if such jacking is required for changing wheels and tires.) f) Flutter, divergence and other aeroelastic testability prevention, and vibration and aeroacoustics.
Maximum Landing Design Weight	It is the <i>maximum design gross weight</i> less the following: assist takeoff fuel, droppable fuel tanks, items expended during routine take-off, and fuel consumed or dumped during one go-around or 3.0 minutes, whichever results in the minimum amount of fuel.
Maximum Takeoff Gross Weight	It is the highest weight authorized at liftoff. (MIL-STD-3013)
Mean Flight Hours Between False Alarms	It is a measure of the average flight hours between <i>false alarms</i> for all <i>faults</i> .
Mean Flight Hours Between Sortie Aborting False Alarms	It is a measure of the average time between <i>Sortie Aborting False Alarms</i> .
Mean Time Between Failures	It is a measure of the average flight hours between <i>failures</i> .
Mean Time Between Maintenance	It is a measure of the average flying hours between maintenance events, both scheduled and unscheduled.
Mean Time To Repair	It is a measure of the average on-equipment corrective maintenance time in an operational environment, regardless of aircrew size.
Mission Capable	A materiel condition such that the <i>aircraft</i> is capable of performing at least one of its assigned missions. (AFI 21-103)

Mission Debriefing	Reviewing and discussing mission accomplishment looking at what was achieved, what barriers were encountered and how the mission could be accomplished better next time. It reinforces training.
Mission-Essential Systems	Systems, subsystems, and <i>components</i> that must function on an <i>aircraft</i> for it to perform assigned mission. (AFI 21-103)
No Drop Weapons Scoring	It provides the ability to simulate air-to-ground non-guided weapons and determine the real-world point of impact and splash points. The associated scoring of the point of impact in relation to the targets is provided. It includes guns, bombs and rockets.
Objectionable	An annoyance, distraction, or discomfort so great as to interfere with task performance. (MIL-STD-1797)
On-Equipment Maintenance	Maintenance tasks that are or can be effectively performed on or at the weapon system or end-item of <i>component</i> .
Open and Priority Modes	In Open mode, up to 10 threats may be displayed on the azimuth indicator. In Priority mode, up to 5 threats are displayed on the azimuth indicator.
Open Systems Architecture	A technical architecture that adopts open, consensus based standards supporting a modular, loosely coupled and highly cohesive system structure. This includes the identification of key interfaces within the system and full design disclosure/data rights. Open Architecture technical practices will apply, at a minimum, to the key interfaces. They are: <ul style="list-style-type: none"> - Modular architectures with <i>open standards</i> and published interfaces; - Separation of hardware and software through middleware; - Maximized reuse of assets to limit unique development; - Full Design disclosure; and - Limited use of well-defined proprietary solutions.
Operating Weight	It is the <i>basic weight</i> plus aircrew and all nonexpendable items not covered under <i>basic weight</i> .
Operational Availability	It is a measure of the percentage of time the <i>aircraft</i> within a unit are operationally capable (ready for tasking) of performing an assigned mission. It provides availability percentages from an operational unit perspective.
Operational Flight Program/Software Item	An aggregation of software, such as a computer program or database, that satisfies an end-use function and is designated for purposes of specification, qualification, testing, interfacing, configuration management, or other purposes. Also they may be designated as a Computer Software Configuration Item.
Operational Lighting Conditions	The ambient lighting from complete darkness to direct sunlight. For this program it is defined as the following lighting conditions: a. Night - 0 foot candles (fC) ambient lighting. b. Daylight (sun over the shoulder) - 10,000 fC ambient diffuse lighting on the face of the display, and 2,000 foot Lambert (fL) ambient specular lighting.
Organizational-Level	Maintenance consisting of those on-equipment tasks normally

Maintenance	performed using the resources of an operating command at an operating location (Ref. AFI 21-101). For example: sortie launch and recovery, maintain and repair material coded for organizational level repair.
Open Standard	It means widely accepted and supported standards set by recognized standards organizations or the marketplace. These standards support interoperability, portability, and scalability and are equally available to the general public at no cost or with a moderate license fee.
Outer Mold Line	All surfaces exposed with landing gear up, gear & access doors closed, and control surfaces fully extended except for windows, lights, and other surfaces that must remain uncoated for proper functionality (i.e., antennas, etc.).
Percent of Fault Detection	It is the measure of the percentage of correct on-equipment <i>fault detections</i> , given the total number of detections (false and actual).
Percent of Fault Isolation	Given correct detection, it is the measure of the percentage of correct on-equipment <i>fault isolations</i> . For the purposes of calculating <i>PFI</i> , the specified fault resolution level is to a single <i>LRU/LRM</i> .
Pilot Envelope Temperature	The arithmetical average of temperature measurements taken about the space occupied by the aircrew and includes measurements taken at the following points: ankles, knees, hips, chest, shoulders, and head.
Pilot-in-the-loop Oscillation	An unintentional sustained or uncontrollable oscillation that results from the efforts of the aircrew to control the <i>aircraft</i>
Post-Stall Gyration	Uncontrolled motions about one or more air vehicle axes following departure from controlled flight. While this type of air vehicle motion involves angles of attack higher than stall angle, lower angles may be encountered intermittently in the course of the motion. (MIL-STD-1797)
Pressure Altitude	It is the altitude in a given atmosphere at which the pressure corresponds to the pressure in the Standard Day atmosphere. It is also the altitude read from an altimeter set at 29.92 in Hg. (MIL-STD-3031)
Primary Fuel	Fuels the <i>aircraft</i> is designed to operate continuously without restrictions and are also used to demonstrate contract compliance for complete steady-state and transient operating conditions. (JSSG-2001)
Readable	Able to be read/deciphered without the use of additional aids.
Resistant to Departure	Departure from controlled flight will only occur with a large and reasonably sustained misapplication of pitch and roll and yaw controls. (MIL-STD-1797)
Safety Critical Fault	A <i>fault</i> indication of any failure mode that has a severity classification category of I (catastrophic) or II (critical) as identified through the FMECA process.
Satisfactory Flying	<i>Flying qualities</i> clearly adequate for the mission Flight Phase.

Qualities	Desired performance is achievable with no more than minimal pilot compensation.
Security Controls	The management, operational, and technical controls (i.e., safeguards or countermeasures) prescribed for an information system to protect the confidentiality, integrity, and availability of the system and its information.
Service Ceiling	It is the highest altitude at which the maximum steady-state rate-of-climb potential is 100 feet per minute, for a specified configuration, weight, speed, and thrust (power) setting. (MIL-STD-3013)
Situational Awareness	In flying, it refers to an aircrew member's continuous perception of self and <i>aircraft</i> in relation to the dynamic environment of flight, threats, and mission, and the ability to forecast, then execute, tasks based upon that perception. (AFI 11-290)
Sortie Aborting False Alarm	A <i>false alarm</i> that causes either a ground or air abort of an attempted sortie.
Special Failure States	Air Vehicle Failure States which have extremely remote probabilities of <i>failure</i> (1×10^{-9}) during a given flight. (MIL-STD-1797)
Standard Configuration	Required <i>aircraft</i> configuration for accomplishing SUPT and IFF training missions. It includes external store(s) required to accomplish SUPT and IFF training missions. SWaP-C margin requirements met. It excludes external stores identified in Table 3-38 except as noted in the profiles in APPENDIX A.
Start-up BIT	An aircraft Built-In-Test mode which is exercised each time power is applied to the item and prior to normal functional operation.
Threat Separation	Function used to separate co-located symbols on azimuth indicator.
Tolerable Flying Qualities	<i>Flying qualities</i> adequate to accomplish the mission Flight Phase, but some increase in pilot workload or degradation in mission effectiveness, or both, exists.
Tolerant	It means the <i>aircraft</i> will not get into an unrecoverable flight condition.
Total Takeoff Distance	The horizontal distance required for the <i>aircraft</i> , with the landing gear extended, to clear a 50-foot obstacle height above the runway for a specified altitude, weight, configuration, and thrust (power) setting. It is the sum of the Ground Run Distance (defined below) plus the airborne distance needed to accelerate and climb to clear the 50-foot height. Ground Run Distance: The distance from brake release (zero velocity) to main wheel liftoff for the specified altitude, weight, configuration, and thrust (power) setting. It is measured from the location of the nose wheel at brake release (zero velocity) to the main wheel liftoff point. (MIL-STD 3013)
Uncommon Atmospheric Disturbances	Levels of atmospheric disturbances which may be encountered infrequently in operations (i.e., probability of exceeding these levels is approximately 1×10^{-3}). (MIL-STD-1797)

Virtual Simulation	A simulation involving real people operating simulated systems. Virtual simulations inject human-in-the-loop in a central role by exercising motor control skills, decision skills, or communication skills.
Virtual Aircraft Virtual Target Virtual Threat	A <i>GBTS</i> component virtually participating in a multi-ship training mission with <i>live aircraft</i> .
Warning	Aircrew <i>alert</i> that visually and/or aurally indicates the existence of a hazardous condition requiring immediate action of the aircrew to prevent loss of life, <i>component</i> damage, or abortion of the mission.
Weight Empty	It is the weight of the <i>aircraft</i> configured with the permanent <i>components</i> required herein. It includes the SWaP-C margins and <u>growth path</u> provisions.
Zone 1 Reach Conditions	Zone 1 Reach Conditions are with the restraint locked and without stretch of arm or shoulder muscles.
Zone 2 Reach Conditions	Zone 2 Reach Conditions are with the restraint locked, but with the aircrew member free to strain against the harness and reach as far as possible.
Zone 3 Reach Conditions	Zone 3 Reach Conditions are with the restraint on but unlocked and the aircrew member free to move to reach the control.

5267 **APPENDIX A - APT SYLLABUS MANEUVERS AND MISSION PROFILES**


5268 **A.1 High G Maneuvering**

5269 The high G maneuver shall be flown with a *Standard Configuration*, at 80% fuel weight (relative
5270 to maximum fuel capacity) and Standard Day conditions. The maneuver shall begin in level
5271 flight (flight path angle no lower than zero and no higher than two degrees nose high), wings
5272 level (± 5 degrees of bank), at 15,000 feet *PA*, and at or below 0.9Mach. From this point, the
5273 aircrew will immediately initiate bank and back pressure to achieve the highest maintainable G-
5274 loading. The G-loading shall be maintained for a minimum of 140 continuous degrees. The
5275 aircrew may begin reducing the load factor and rolling out after a minimum of 140 degrees in
5276 order to roll out at approximately 180 degrees of turn. The flight path angle shall be no lower
5277 than 15 degrees nose low and the *aircraft* shall descend to no lower than 13,000 feet *PA* during
5278 any portion of the entire 180-degree maneuver. There is no power setting specified for this
5279 maneuver. The *aircraft* shall lose no more than 10% of the initial airspeed during the 180-degree
5280 maneuver. There are no specified degrees of turn for roll in or roll out. "Approximately 180
5281 degrees of turn" is meant to describe a recognizable maneuver without mandating exactly 180
5282 degrees. There is no specified length of time for the 140-degree portion of the maneuver or for
5283 the 180-degree maneuver as a whole. Minimum acceptable load factor will be 6.5 sustained for a
5284 minimum of 140 degrees. The lowest load factor registered during the 140-degree period will
5285 establish G-loading for the maneuver. For example, if the *aircraft* maintains 7.2Gs for less than
5286 140 degrees and then drops to 6.9Gs by the end of the 140-degree period, 6.9Gs will be used as
5287 the maximum G-loading. There is no requirement to exceed 7.5Gs.

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219
Section J, Attachment 3, Aircraft SS

5288 A.2 Flight Endurance Mission Profile

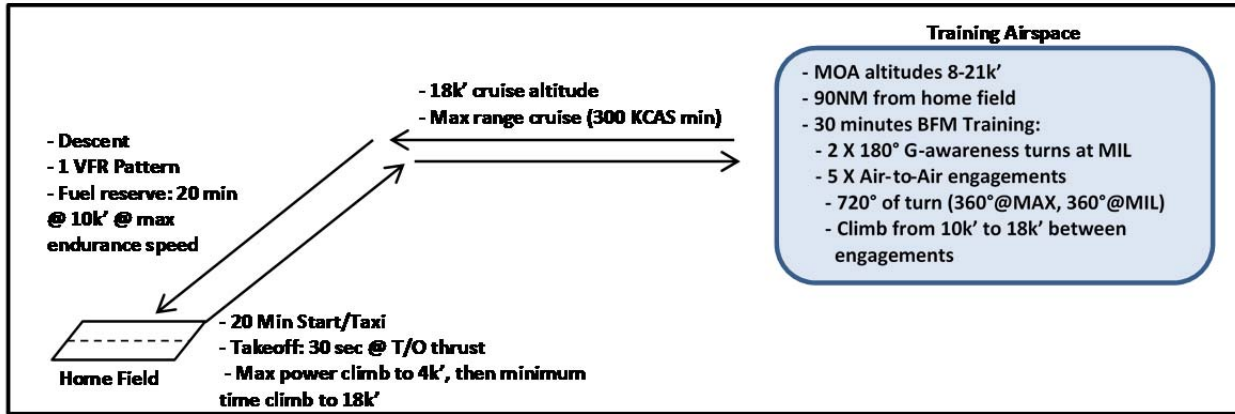

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAXI, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	SL TO 4,000 FEET	MAX
C	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	4,000 TO 18,000 FEET	INTERMEDIATE
D	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
E	MANEUVER	2 x 180 DEGREE G-AWARENESS TURNS @ MILITARY POWER					
F	CLIMB				MINIMUM TIME CLIMB SCHEDULE	13,000 TO 18,000 FEET	INTERMEDIATE
G	MANEUVER (2)	5 x 720 DEGREE TURN (3)					
H	CLIMB				MINIMUM TIME CLIMB SCHEDULE	10,000 TO 18,000 FEET	INTERMEDIATE
I	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
J	DESCENT			(1)		18,000 TO 10,000 FEET	
K	1 VFR PATTERNS	ONE PATTERN FROM INITIAL CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED. NO DISTANCE CREDIT. (4)					
L	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
	NOTES:	(1) 90 NM INCLUDES CLIMB/DESCENT DISTANCE (2) MINIMUM TIME CLIMB FROM 10,000 FEET TO 18,000 FEET TO START EACH OF THE LAST 4 MANEUVERS OF SEGMENT G (3) FOR AUGMENTED AIRCRAFT, THE POWER SETTING FOR THE FIRST 360 DEGREES OF EACH ENGAGEMENT SHALL BE MAX POWER; THE SECOND 360 DEGREES SHALL BE MILITARY POWER. POWER SETTING FOR NON-AUGMENTED AIRCRAFT SHALL BE MIL POWER FOR THE DURATION (4) PATTERN SPEED IS 300 KCAS					


UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5289 A.3 Specialized Undergraduate Pilot Training (SUPT) Profile 1, Transition

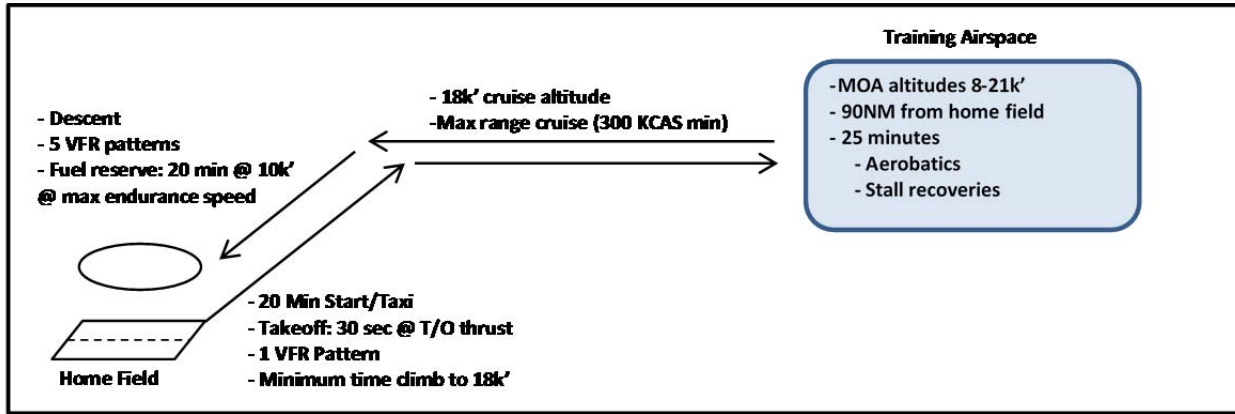

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO PATTERN SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1,000 FEET @ MAX THRUST. NO DISTANCE CREDIT. (1)					
B	1 VFR PATTERN	ONE PATTERN CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1,000 FEET @ MIL THRUST. ONE TOUCH & GO. NO DISTANCE CREDIT. (1)					
C	CLIMB			(2)	MINIMUM TIME CLIMB SCHEDULE	SL TO 18,000 FEET	INTERMEDIATE
D	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
E	MANEUVER		25 MIN		350 KCAS	8,000-21,000 FEET BLOCK (3)	
F	CLIMB				MINIMUM TIME CLIMB SCHEDULE	14,000 TO 18,000 FEET	INTERMEDIATE
G	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
H	DESCENT			(2)		18,000 TO 1,000 FEET	
I	5 VFR PATTERNS	FIVE PATTERNS EACH CONSISTING OF FUEL FOR 13 NM @ 1000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1000 FEET @ MIL THRUST. FOUR TOUCH & GO'S. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (1)					
J	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
K	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
NOTES:		(1) PATTERN SPEED IS 300 KCAS (2) 90 NM INCLUDES CLIMB/DESCENT DISTANCE (3) MANEUVER IS CALCULATED AT THE AVERAGE ALTITUDE AS THE AIRCRAFT OPERATES THROUGH THE ALTITUDE BAND FROM 8,000 TO 21,000 FEET					


UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5290 A.4 Specialized Undergraduate Pilot Training (SUPT) Profile 2, Instruments/Navigation

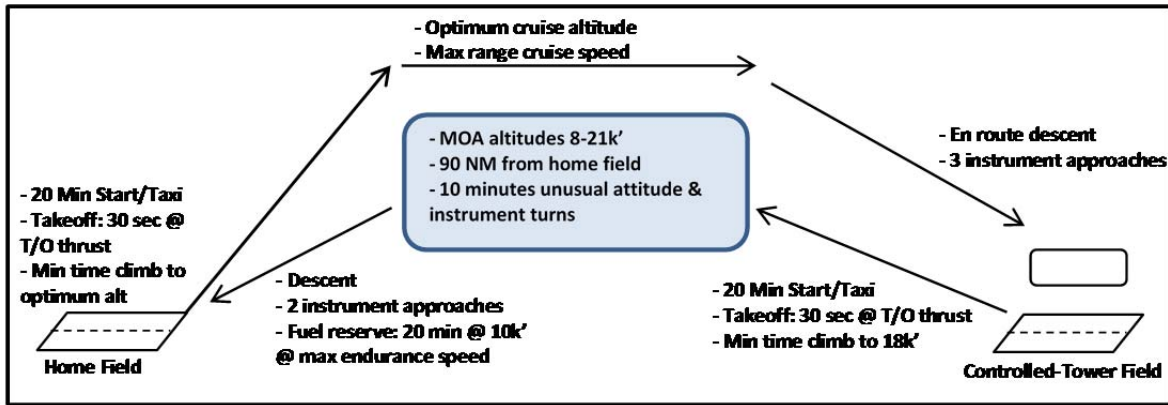

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	SL TO OPTIMUM CRUISE ALTITUDE	INTERMEDIATE
C	CRUISE			250 NM (1)	MAX RANGE CRUISE	OPTIMUM CRUISE ALTITUDE	
D	DESCENT			(1)		OPTIMUM TO 3,000 FEET	
E	3 IFR PATTERNS	THREE PATTERNS EACH CONSISTING OF FUEL FOR 50 NM @ 3000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1000 FEET @ MIL THRUST. TWO TOUCH & GO'S. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (2)					
F	FULL STOP AND TAXI (3)	NO FUEL USAGE PENALTY					
G	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
H	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
I	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	SL TO 25,000 FEET	INTERMEDIATE
J	CRUISE			160 NM (1)	MAX RANGE CRUISE	25,000 FEET	
K	MANUEVER		10 MINS		350 KCAS	8-21,000 FEET BLOCK (4)	
L	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	14,000 TO 18,000 FEET	INTERMEDIATE
M	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
N	DESCENT			(1)		18,000 TO 3,000 FEET	
O	2 IFR PATTERNS	TWO PATTERNS EACH CONSISTING OF FUEL FOR 50 NM @ 3000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1000 FEET @ MIL THRUST. ONE TOUCH & GO. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (2)					
P	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
Q	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
	NOTES:	(1) INCLUDES CLIMB/DESCENT DISTANCE (2) PATTERN SPEED IS 300 KCAS (3) REFUEL AFTER SEGMENT F (4) MANUEVER IS CALCULATED AT THE AVERAGE ALTITUDE AS THE AIRCRAFT OPERATES THROUGH THE ALTITUDE BAND FROM 8,000 TO 21,000 FEET					


UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5291 A.5 Specialized Undergraduate Pilot Training (SUPT) Profile 3, Low-Level Navigation

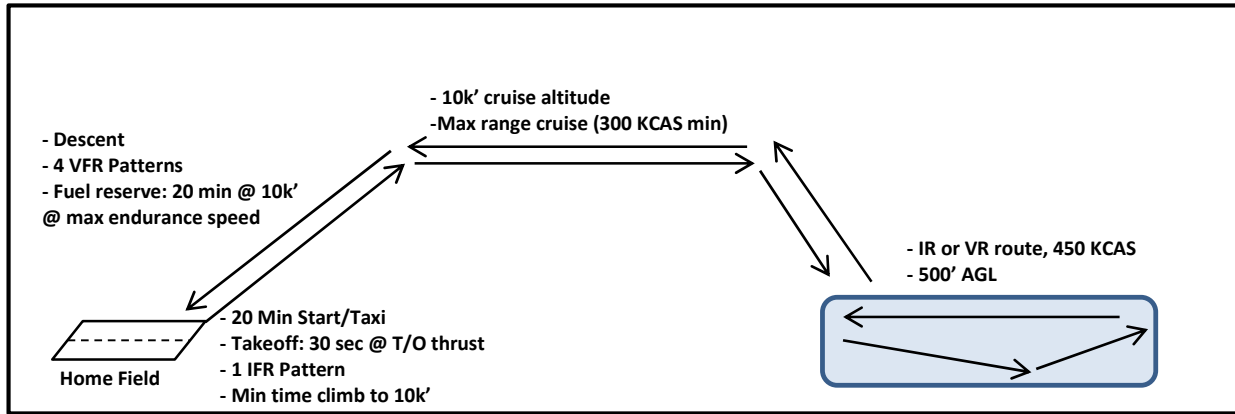

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE TO CLIMB SPEED AND CLIMB FROM SL TO 1,000 FEET @ MAX THRUST. NO DISTANCE CREDIT.					
B	1 IFR PATTERN	ONE PATTERN CONSISTING OF FUEL FOR 50 NM @ 3000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1000 FEET @ MIL THRUST. ONE TOUCH & GO. NO DISTANCE CREDIT. (2)					
C	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	1,000 FEET TO 10,000 FEET	INTERMEDIATE
D	CRUISE			30 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	10,000 FEET	
E	DESCENT			(1)		10,000 FEET TO 500 FEET	
F	PENETRATION			50 NM	450 KCAS	500 FEET	
G	WITHDRAWAL			50 NM	450 KCAS	500 FEET	
H	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	500 FEET TO 10,000 FEET	INTERMEDIATE
I	CRUISE			30 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	10,000 FEET	
J	DESCENT			(1)		10,000 FEET TO 1,000 FEET	
K	4 VFR PATTERNS	FOUR PATTERNS EACH CONSISTING OF FUEL FOR 13 NM @ 1000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1000 FEET @ MIL THRUST. THREE TOUCH & GO'S. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (2)					
L	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
M	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
NOTES:		(1) 30 NM INCLUDES CLIMB/DESCENT DISTANCE (2) PATTERN SPEED IS 300 KCAS					


UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5292 A.6 Specialized Undergraduate Pilot Training (SUPT) Profile 4, Formation

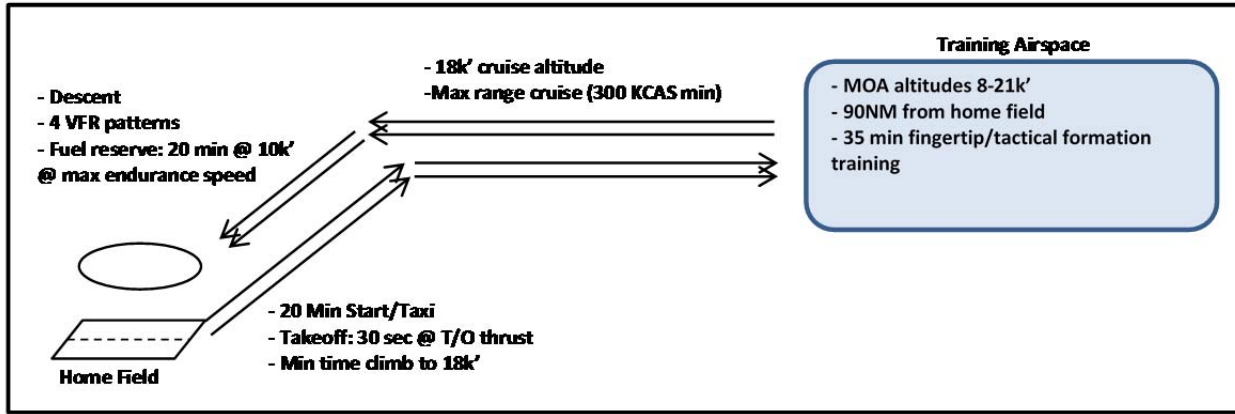

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(2)	MINIMUM TIME CLIMB SCHEDULE	SL TO 18,000 FEET	INTERMEDIATE
C	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
D	MANEUVER		35 MINS		350 KCAS	8,000 TO 21,000 FEET BLOCK (3)	
E	CLIMB				MINIMUM TIME CLIMB SCHEDULE	14,000 TO 18,000 FEET	INTERMEDIATE
F	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
G	DESCENT			(2)		18,000 FEET TO 1,000 FEET	
H	4 VFR PATTERNS	FOUR PATTERNS EACH CONSISTING OF FUEL FOR 13 NM @ 1000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1000 FEET @ MIL THRUST. THREE TOUCH & GO'S. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (1)					
I	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
J	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
NOTES:		(1) PATTERN SPEED IS 300 KCAS (2) 90 NM INCLUDES CLIMB/DESCENT DISTANCE (3) MANEUVER IS CALCULATED AT THE AVERAGE ALTITUDE AS THE AIRCRAFT OPERATES THROUGH THE ALTITUDE BAND FROM 8,000 TO 21,000 FEET					


UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5293 A.7 Specialized Undergraduate Pilot Training (SUPT) Profile 5, Cross-Country

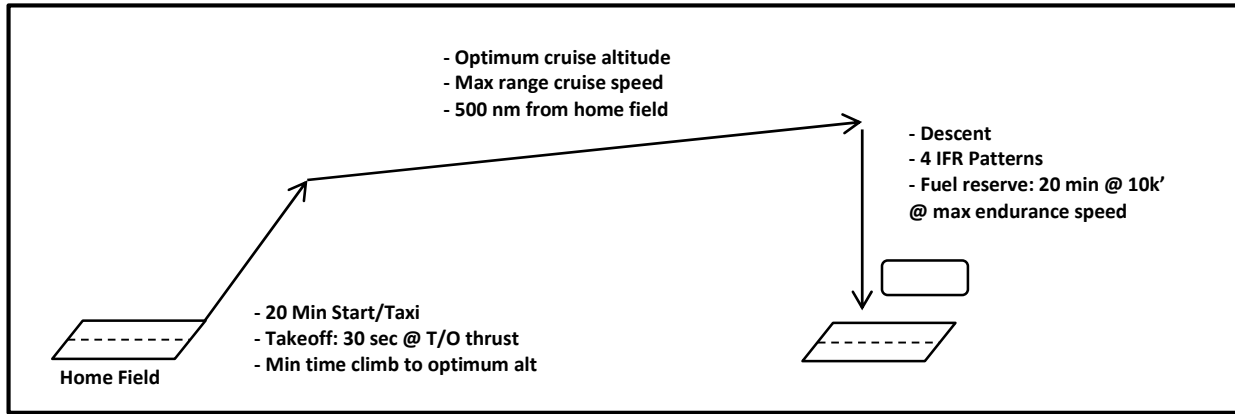


	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	SL TO OPTIMUM CRUISE ALTITUDE	INTERMEDIATE
C	CRUISE			500 NM (1)	MAX RANGE CRUISE	OPTIMUM CRUISE ALTITUDE	
D	DESCENT			(1)		OPTIMUM TO 3,000 FEET	
E	4 IFR PATTERNS	FOUR PATTERNS CONSISTING OF FUEL FOR 50 NM @ 3000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1000 FEET @ MIL THRUST. THREE TOUCH & GO'S. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (2)					
F	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
G	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
NOTES:		(1) 500 NM INCLUDES CLIMB/DESCENT DISTANCE (2) PATTERN SPEED IS 300 KCAS *A/C CONFIGURED WITH TRAVEL POD					

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5294 A.8 Introduction to Fighter Fundamentals (IFF) Profile 1, Formation

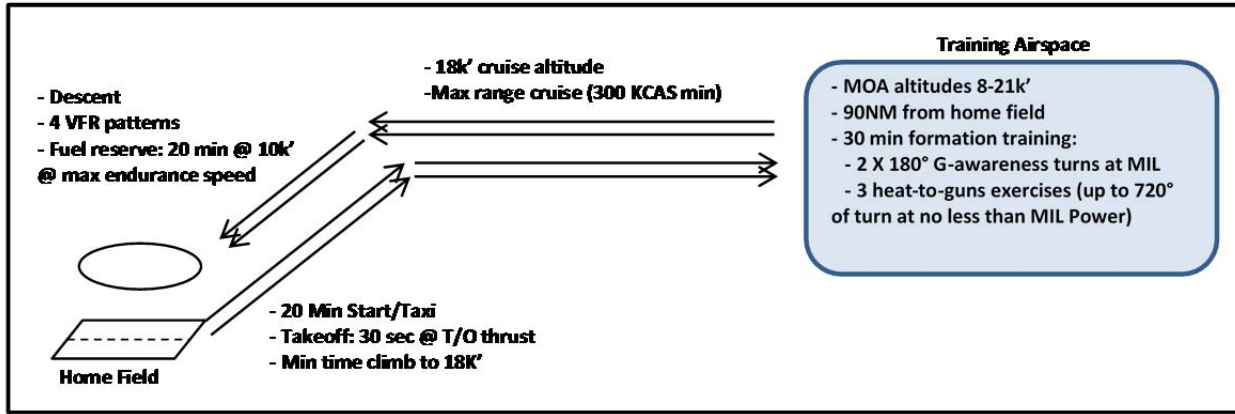

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(2)	MINIMUM TIME CLIMB SCHEDULE	SL TO 18,000 FEET	INTERMEDIATE
C	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
D	MANEUVER (3)	2 x 180 DEGREE G-AWARENESS TURNS @ MILITARY POWER					
E	MANEUVER (3)	3 RUNS EACH CONSIST OF A 720 DEGREE TURN @ NO LESS THAN MIL POWER					
F	CLIMB				MINIMUM TIME CLIMB SCHEDULE	14,000 TO 18,000 FEET	INTERMEDIATE
G	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
H	DESCENT			(2)		18,000 FEET TO 1,000 FEET	
I	4 VFR PATTERNS	FOUR PATTERNS EACH CONSISTING OF FUEL FOR 13 NM @ 1000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1000 FEET @ MIL THRUST. THREE TOUCH & GO'S. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (1)					
J	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
K	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
NOTES:		(1) PATTERN SPEED IS 300 KCAS (2) 90 NM INCLUDES CLIMB/DESCENT DISTANCE (3) TOTAL TIME FOR SEGMENTS D&E IS 30 MINUTES, ALTITUDE BLOCK OF 8,000 TO 21,000 FEET					


UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5295 A.9 Introduction to Fighter Fundamentals (IFF) Profile 2, Basic Fighter Maneuvers (BFM)

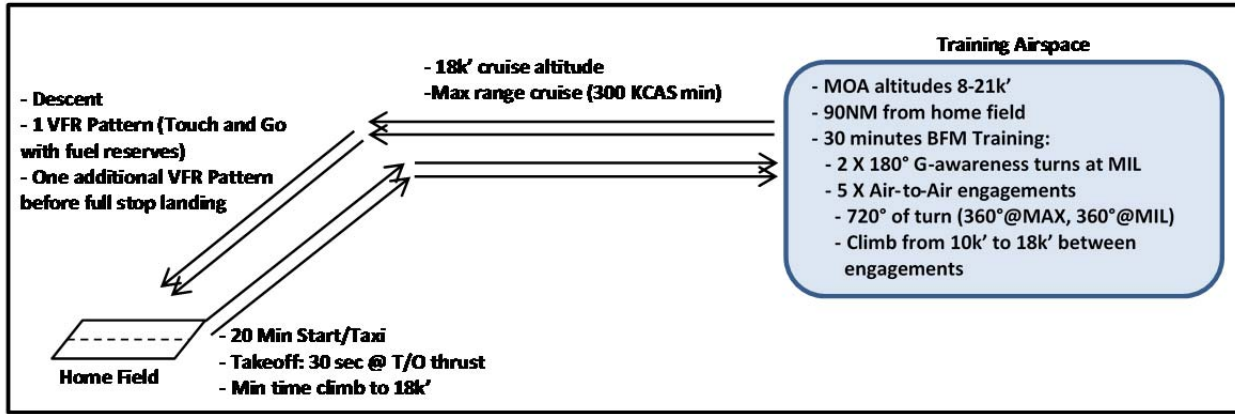

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAXI, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	SLTO 18,000 FEET	INTERMEDIATE
C	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
D	MANEUVER	2 x 180 DEGREE G-AWARENESS TURNS @ MILITARY POWER					
E	CLIMB				MINIMUM TIME CLIMB SCHEDULE	13,000 TO 18,000 FEET	INTERMEDIATE
F	MANEUVER (2)	5 x 720 DEGREE TURN (3)					
G	CLIMB				MINIMUM TIME CLIMB SCHEDULE	10,000 TO 18,000 FEET	INTERMEDIATE
H	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
I	DESCENT			(1)		18,000 TO 1,000 FEET	
J	1 VFR PATTERN	ONE PATTERN CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1,000 FEET @ MIL THRUST. ONE TOUCH & GO. (4)					
K	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
L	1 VFR PATTERN	ONE PATTERN CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED. NO DISTANCE CREDIT. (4)					
M	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
NOTES:		(1) 90 NM INCLUDES CLIMB/DESCENT DISTANCE (2) MINIMUM TIME CLIMB FROM 10,000 FEET TO 18,000 FEET TO START EACH OF THE LAST 4 MANEUVERS OF SEGMENT F (3) FOR AUGMENTED AIRCRAFT, THE POWER SETTING FOR THE FIRST 360 DEGREES OF EACH ENGAGEMENT SHALL BE MAX POWER; THE SECOND 360 DEGREES SHALL BE MILITARY POWER. POWER SETTING FOR NON-AUGMENTED AIRCRAFT SHALL BE MIL POWER FOR THE DURATION (4) PATTERN SPEED IS 300 KCAS					


UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5296 A.10 Introduction to Fighter Fundamentals (IFF) Profile 3, Air Combat Maneuvering

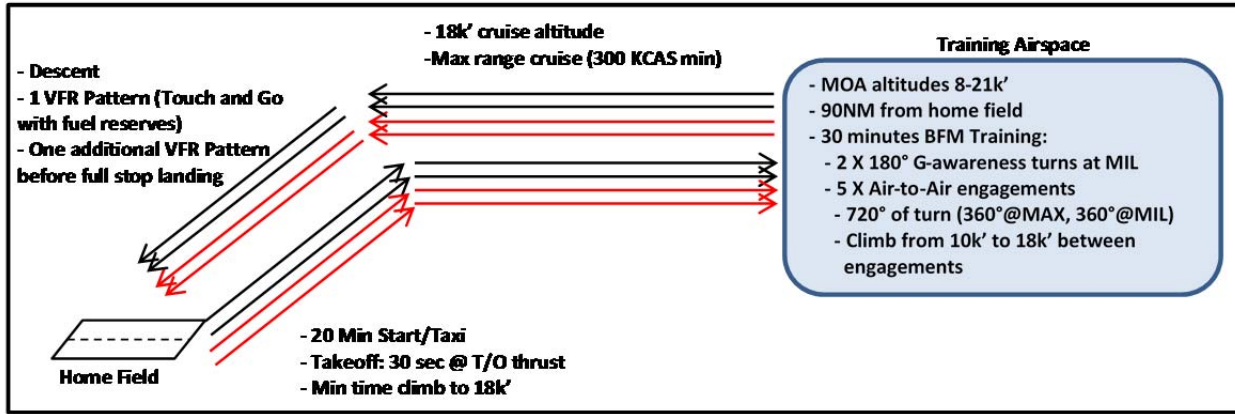


	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAXI, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	SLTO 18,000 FEET	INTERMEDIATE
C	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
D	MANEUVER	2 x 180 DEGREE G-AWARENESS TURNS @ MILITARY POWER					
E	CLIMB				MINIMUM TIME CLIMB SCHEDULE	13,000 TO 18,000 FEET	INTERMEDIATE
F	MANEUVER (2)	5 x 720 DEGREE TURN (3)					
G	CLIMB				MINIMUM TIME CLIMB SCHEDULE	10,000 TO 18,000 FEET	INTERMEDIATE
H	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
I	DESCENT			(1)		18,000 TO 1,000 FEET	
J	1 VFR PATTERN	ONE PATTERN CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1,000 FEET @ MIL THRUST. ONE TOUCH & GO. (4)					
K	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
L	1 VFR PATTERN	ONE PATTERN CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED. NO DISTANCE CREDIT. (4)					
M	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
NOTES:		(1) 90 NM INCLUDES CLIMB/DESCENT DISTANCE (2) MINIMUM TIME CLIMB FROM 10,000 FEET TO 18,000 FEET TO START EACH OF THE LAST 4 MANEUVERS OF SEGMENT F (3) FOR AUGMENTED AIRCRAFT, THE POWER SETTING FOR THE FIRST 360 DEGREES OF EACH ENGAGEMENT SHALL BE MAX POWER; THE SECOND 360 DEGREES SHALL BE MILITARY POWER. POWER SETTING FOR NON-AUGMENTED AIRCRAFT SHALL BE MIL POWER FOR THE DURATION (4) PATTERN SPEED IS 300 KCAS					

UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219
Section J, Attachment 3, Aircraft SS

5297 A.11 Introduction to Fighter Fundamentals (IFF) Profile 4, Basic Surface Attack

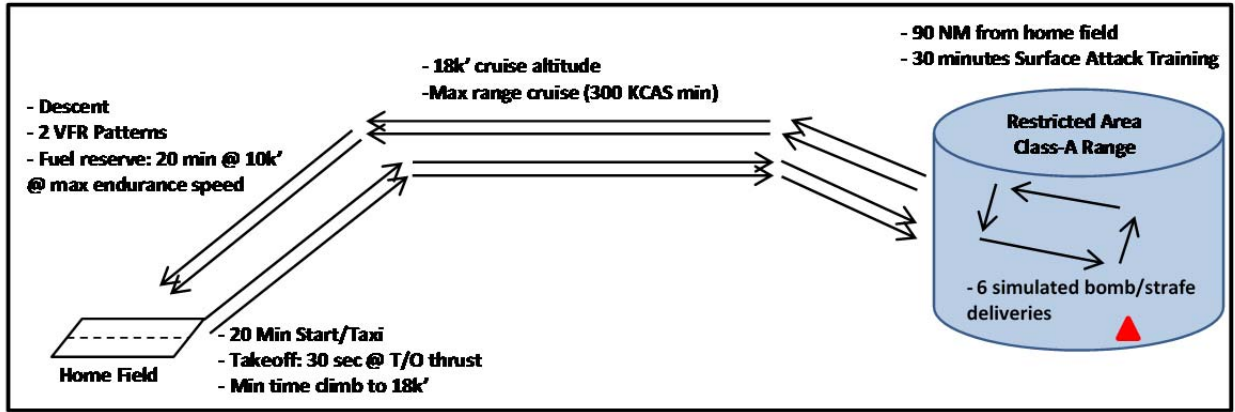

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	SL TO 18,000 FEET	INTERMEDIATE
C	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
D	MANEUVER (3)	6 BOX PATTERNS WITH MAX G TURNS @ 420 KCAS					
E	CLIMB			(1)	MINIMUM TIME CLIMB SCHEDULE	12,000 TO 18,000 FEET	INTERMEDIATE
F	CRUISE			90 NM (1)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
G	DESCENT			(1)		18,000 TO 1,000 FEET	
H	2 VFR PATTERNS	TWO PATTERNS CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1,000 FEET @ MIL THRUST. ONE TOUCH AND GO. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (2)					
I	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
J	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
	NOTES:	(1) 90 NM INCLUDES CLIMB/DESCENT DISTANCE (2) PATTERN SPEED IS 300 KCAS (3) BLOCK ALTITUDE FROM SL TO 25,000 FEET, 30 MINUTES TOTAL TIME					


UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5298 A.12 Introduction to Fighter Fundamentals (IFF) Profile 5, Surface Attack Tactics

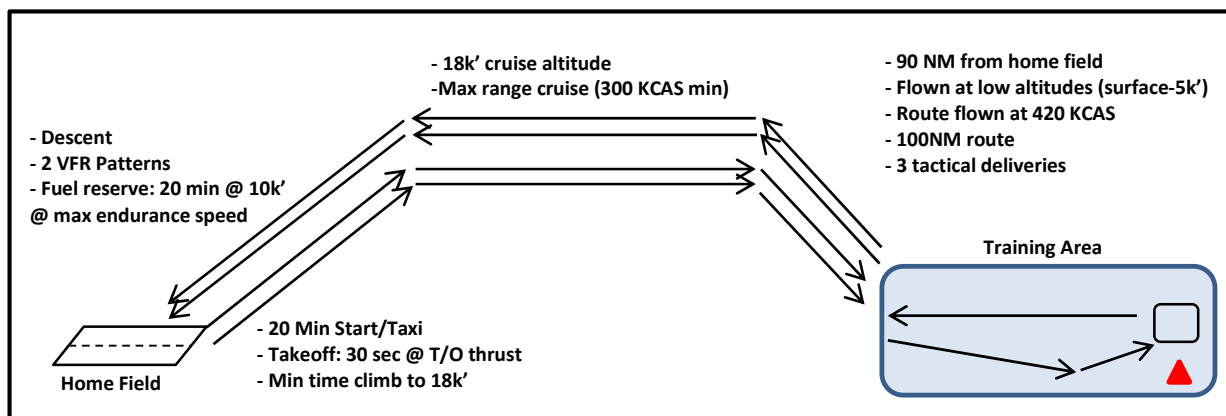


	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTIITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(2)	MINIMUM TIME CLIMB SCHEDULE	SL TO 18,000 FEET	INTERMEDIATE
C	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
D	DESCENT			(2)		18,000 TO 5,000 FEET	
E	PENETRATION			50 NM	420 KCAS	SL TO 5,000 FEET BLOCK	
F	MANEUVER (3)	3 BOX PATTERNS, 15 NM EACH AT 420 KCAS					
G	WITHDRAWAL			50 NM	420 KCAS	SL TO 5,000 FEET BLOCK	
H	CLIMB			(2)	MINIMUM TIME CLIMB SCHEDULE	2,500 TO 18,000 FEET	INTERMEDIATE
I	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
J	DESCENT			(2)		18,000 TO 1,000 FEET	
K	2 VFR PATTERNS	TWO PATTERNS CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1,000 FEET @ MIL THRUST. ONE TOUCH & GO. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (1)					
L	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
M	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
NOTES:		(1) PATTERN SPEED IS 300 KCAS (2) 90 NM INCLUDES CLIMB/DESCENT DISTANCE (3) 3 SIMULATED TACTICAL WEAPON DELIVERIES					

UNCLASSIFIED

PRF APT-ACFT-1001
APPENDIX A

FA8617-16-R-6219
Section J, Attachment 3, Aircraft SS

5299 A.13 Introduction to Fighter Fundamentals (IFF) Profile 6, Close Air Support

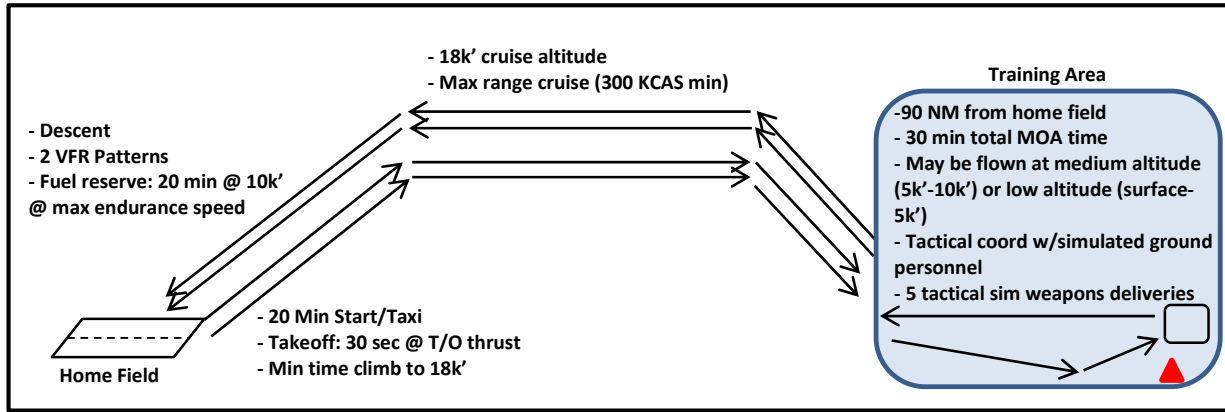

	SEGMENT	FUEL	TIME	DISTANCE	SPEED	ALTITUDE	POWER
A	WARM-UP, TAKEOFF, AND ACCELERATE TO CLIMB SPEED	FUEL FOR 20 MIN @ GROUND IDLE + 30 SEC @ TAKEOFF/MAXIMUM POWER (A/B IF REQUIRED) + FUEL TO ACCELERATE FROM OBSTACLE CLEARANCE TO CLIMB SPEED @ MILITARY/INTERMEDIATE RATED THRUST. NO DISTANCE CREDIT.					
B	CLIMB			(2)	MINIMUM TIME CLIMB SCHEDULE	SL TO 18,000 FEET	INTERMEDIATE
C	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
D	DESCENT			(2)		18,000 TO 5,000 FEET	
E	MANEUVER		30 MIN		350 KCAS	SL TO 10,000 FEET BLOCK	
F	CLIMB			(2)	MINIMUM TIME CLIMB SCHEDULE	2,500 TO 18,000 FEET	INTERMEDIATE
G	CRUISE			90 NM (2)	GREATER OF MAX RANGE OR 300 KCAS	18,000 FEET	
H	DESCENT			(2)		18,000 TO 1,000 FEET	
I	2 VFR PATTERNS	TWO PATTERNS CONSISTING OF FUEL FOR 13 NM @ 1,000 FEET PA @ PATTERN SPEED + FUEL TO ACCELERATE TO PATTERN SPEED AND CLIMB FROM SL TO 1,000 FEET @ MIL THRUST. ONE TOUCH & GO. TAKEOFF SEGMENT MAY BE ELIMINATED FOR PATTERN ENDING IN FULL STOP. NO DISTANCE CREDIT. (1)					
J	FULL STOP AND TAXI	NO FUEL USAGE PENALTY					
K	RESERVES		20 MIN	NO CREDIT	MAX ENDURANCE	10,000 FEET	
NOTES:		(1) PATTERN SPEED IS 300 KCAS (2) 90 NM INCLUDES CLIMB/DESCENT DISTANCE					

UNCLASSIFIED

5300 **A.14 Mission Usage Rates**

5301 **Table A-1, Mission Usage Rates**

	Flt Hrs/Sortie	Percent of Utilization	Lifetime Hours	Lifetime Sorties	Full-Stop Landings	Touch & Go Landings
SUPT 1 - Transition	1.1	11.9%	950.8	864	864	4320
SUPT 2 - Instrum/Nav	1.3	5.9%	468.2	360	360	1800
SUPT 3 - Low-Level Nav	1.2	1.8%	147.3	123	123	492
SUPT 4 - Formation	1.2	15.0%	1200.5	1000	1000	3000
SUPT 5 - Cross-Country	1.3	3.5%	280.9	216	216	648
IFF 1 - Formation	1.1	12.2%	976.4	888	888	2664
IFF 2 - BFM	0.9	30.6%	2449.0	2721	2721	2721
IFF 3 - ACM	0.9	6.5%	518.6	576	576	576
IFF 4 - BSA	0.9	5.6%	451.4	502	502	502
IFF 5 - SAT	1.1	3.2%	256.1	233	233	233
IFF 6 - CAS	1.1	3.8%	300.9	274	274	274
Totals per lifetime		100%	8000	7757	7757	17230

- 5302 a. The *aircraft* begins each sortie with maximum fuel weight.
- 5303 b. The *aircraft* is configured in the *Standard Configuration* for all mission profiles except
- 5304 the Cross-Country profile.
- 5305 c. For the Cross-Country profile, the *aircraft* is configured with a loaded (140 lbs. worth of
- 5306 gear) Next Generation Cargo Pod as defined in Table 3-38, Loadout #2.
- 5307 d. Engine operating time to include 20 minutes ground idle before takeoff and 10-minute
- 5308 taxi upon landing.
- 5309 e. Mission Profiles A.3-A.13 and Table A-1 are to be used as the basis for Design Service
- 5310 Life as defined in section 3.1.3.1.
- 5311 f. For *aircraft* configurations fully integrating aerial refueling capability (3.4.2.1), the usage
- 5312 shall be defined as follows: 2.5 % of IFF hours will include aerial refueling with 8
- 5313 contacts/disconnects per hour.

5314 **APPENDIX B - ESCAPE SYSTEM CALCULATIONS**

5315 **B.1 Dynamic Response Index (DRI)**

5316 The DRI is representative of the maximum dynamic compression of the vertebral column of the
5317 human body. In physical terms, the human body is described mathematically in terms of an
5318 analogous, lumped parameter mechanical model consisting of a mass, spring, and damper. DRI
5319 was originally developed for catapult phase only; given the acceleration vector is parallel to the
5320 spinal column; within 5° of the z-axis. DRI terms have also been developed for the x-axis (DRI_x)
5321 and y-axis (DRI_y) which can be combined with the original z-axis term (essentially DRI_z) to
5322 describe acceleration effects on the human body from all axes after the ejection seat has
5323 separated from the *aircraft* (see MDRC below). The compression of the human body along an
5324 axis, *i*, is captured by the following second order differential equation:

$$\ddot{\delta}_i(t) + 2\zeta_i\omega_{n_i}\dot{\delta}_i(t) + (\omega_{n_i})^2\delta_i(t) = A_i(t)$$

5325 Where:

$\delta_i(t)$	Displacement of the occupant's body with respect to the critical point
$\dot{\delta}_i(t)$	Occupant's relative velocity with respect to the critical point
$\ddot{\delta}_i(t)$	Occupant's acceleration in an inertial frame
ζ_i	Damping coefficient ratio of the dynamic system
ω_{n_i}	Undamped natural frequency of the dynamic system
$A_i(t)$	Measured acceleration along the i-axis of the seat at the critical point

5326 The estimated natural frequency and damping ratio for the USAF flying population along each
5327 axis direction is given in Table B-1 based on axis orientation as shown in Figure B-1.


5328

Table B-1, Natural Frequency and Damping Ratio Coefficients

Axis	Direction	ω_n (rad/s)	ζ
-X	Eyeballs Out	60.8	0.04
+X	Eyeballs In	62.8	0.2
-Y	Eyeballs Left	58.0	0.09
+Y	Eyeballs Right	58.0	0.09
-Z	Eyeballs Up	47.1	0.24
+Z	Eyeballs Down	52.9	0.224

5329

Figure B-1, Seat and Human Axis Coordinate System

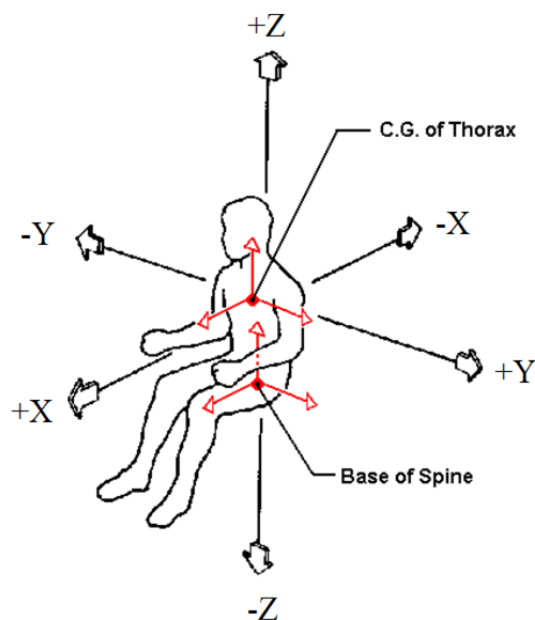

5330 The dynamic response for each axis is calculated as follows; where g is the acceleration due to
5331 gravity:

$$DR_i(t) = \frac{(\omega_{n_i})^2 \delta_i(t)}{g}$$

5332 At the maximum deflection, the DRI is defined as:

$$DRI_i = \frac{(\omega_{n_i})^2 \delta_i^{max}}{g}$$

5333 **B.2 Multi-axis Dynamic Response Criterion (MDRC)**

5334 MDRC is defined as:

$$MDRC(t) = \sqrt{\left(\frac{DR_x(t)}{DR_x^{lim}}\right)^2 + \left(\frac{DR_y(t)}{DR_y^{lim}}\right)^2 + \left(\frac{DR_z(t)}{DR_z^{lim}}\right)^2}$$

5335 Where:


$DR_{x,y,z}$	The dynamic response values computed for each x-, y-, and z-axis component of the acceleration time history (see paragraph a for calculation method).
$DR_{x,y,z}^{lim}$	The limit value of the dynamic response for each axis direction; as shown in Table B-2.

5336 **Table B-2, MDRC Dynamic Response Limits per Axis**

Axis Direction	Limits (5% Injury Risk)
- X Eyeballs Out +X Eyeballs In	$DR_x^{lim} = 35$ $DR_x^{lim} = 40$
- Y Eyeballs Left +Y Eyeballs right	$DR_y^{lim} = 17$ $DR_y^{lim} = 17$
- Z Eyeballs Up +Z Eyeballs Down	$DR_z^{lim} = 16.5$ $DR_z^{lim} = 18$

5337

Figure B-2, Maximum allowable MDRC value vs. Ejection Seat

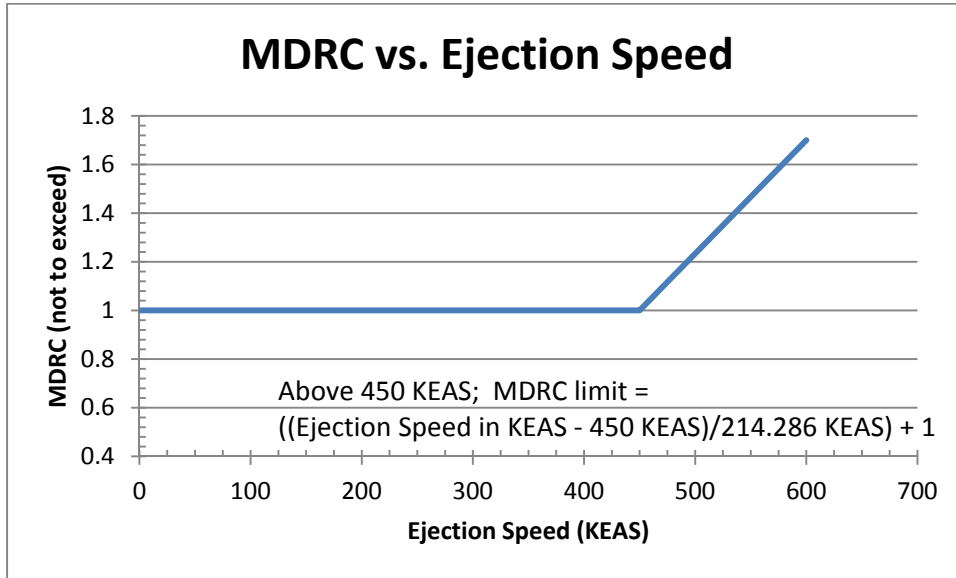


5338 **B.3 Head Injury**

Head Injury calculations for catapult and free flight drogue phase are calculated using the resultant linear and rotational head accelerations, where 'a' is the observed peak linear acceleration and 'α' is the observed peak rotational acceleration, as a function of time.

5339 Figure B-3 shows probability of concussion plotted against 'a' and 'α'.

$$P_{concussion} = \frac{1}{1 + e^{-(-10.2 + 0.0433a + 0.000873\alpha - 0.00000092a\alpha)}}$$

5340 **Figure B-3, Probability of Concussion vs. Rotational and Linear Acceleration**

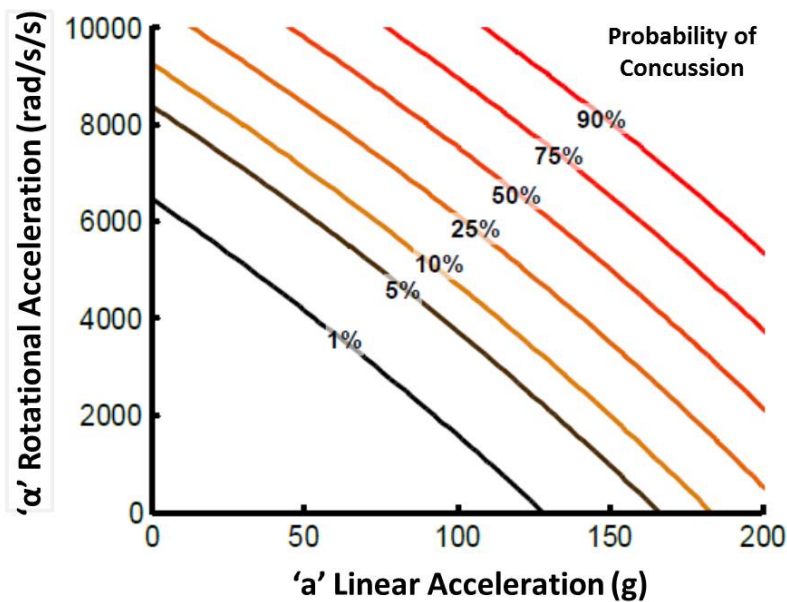

5341 **B.4 Neck Injury**

- 5342 a. Multi-Axial Neck Injury Criteria (MANIC) (identified as MANIC(G_y) by Parr) is defined
5343 as:

$$MANIC = \sqrt{\left(\frac{F_X}{F_{Xcrit}}\right)^2 + \left(\frac{F_Y}{F_{Ycrit}}\right)^2 + \left(\frac{F_Z}{F_{Zcrit}}\right)^2 + \left(\frac{M_Y}{M_{Ycrit}}\right)^2 + \left(\frac{M_Z}{M_{Zcrit}}\right)^2}$$

- 5344 b. Neck Moment Index about the x-axis (NMI_x) is defined as:

$$NMI_x = \frac{M_x}{M_{xcrit}}$$

5345 Where (for Appendix 8.4a. and 8.4b calculations):

- 5346 F_x = observed x direction shear loading
5347 F_{xcrit} = critical intercept value for x direction shear loading
5348 F_y = observed y direction shear loading
5349 F_{ycrit} = critical intercept value for y direction shear loading
5350 F_z = observed axial loading (+F_z = tension, -F_z = compression)
5351 F_{zcrit} = critical intercept value for axial loading (different for tension/compression)
5352 M_x = observed moment about the anatomical x axis (side bending)
5353 M_{xcrit} = critical intercept value for side bending
5354 M_y = observed moment about the anatomical y axis (sagittal plane anterior/posterior
5355 bending, +M_y = flexion, -M_y = extension)
5356 M_{ycrit} = critical intercept value for sagittal plane moments (different for flexion/extension)
5357 M_z = observed moment about the anatomical z axis (neck twisting)
5358 M_{zcrit} = critical intercept value for neck twisting

PRF APT-ACFT-1001
APPENDIX B

FA8617-16-R-6219

Section J, Attachment 3, Aircraft SS

5359


Table B-3, MANIC and NMIX Upper Neck Critical Values based on Body Mass

Manikin Neck Size	Manikin Mass (lbs)	Human Mass (lbs)	Component	Force		Component	Moment	
				(lbs)	(N)		(in-lbs)	(N-m)
Small Female Hybrid III (for 103-135 pound manikin)	103	<114	F _{xcrit}	405	1802	M _{xcrit}	593	67
			F _{ycrit}			-M _{ycrit} (extens)		
			-F _{zcrit} (comp)	872	3880	M _{zcrit}		
			+F _{zcrit} (tens)	964	4287	+M _{ycrit} (flex)		
	125	114-130.5	F _{xcrit}	496	2206	M _{xcrit}	845	95
			F _{ycrit}			-M _{ycrit} (extens)		
			-F _{zcrit} (comp)	1099	4889	M _{zcrit}		
			+F _{zcrit} (tens)	1214	5400	+M _{ycrit} (flex)		
	136	130.5-143	F _{xcrit}	522	2322	M _{xcrit}	912	103
			F _{ycrit}			-M _{ycrit} (extens)		
			-F _{zcrit} (comp)	1157	5147	M _{zcrit}		
			+F _{zcrit} (tens)	1278	5685	+M _{ycrit} (flex)		
Mid Male Hybrid III (for 136-199 pound manikin)	150	143-161	F _{xcrit}	561	2495	M _{xcrit}	1016	115
			F _{ycrit}			-M _{ycrit} (extens)		
			-F _{zcrit} (comp)	1243	5529	M _{zcrit}		
			+F _{zcrit} (tens)	1373	6107	+M _{ycrit} (flex)		
	172	161-186	F _{xcrit}	625	2780	M _{xcrit}	1195	135
			F _{ycrit}			-M _{ycrit} (extens)		
			-F _{zcrit} (comp)	1385	6160	M _{zcrit}		
			+F _{zcrit} (tens)	1530	6806	+M _{ycrit} (flex)		
	200	186-210	F _{xcrit}	683	3038	M _{xcrit}	1364	154
			F _{ycrit}			-M _{ycrit} (extens)		
			-F _{zcrit} (comp)	1513	6730	M _{zcrit}		
			+F _{zcrit} (tens)	1671	7433	+M _{ycrit} (flex)		
Large Male Hybrid III (for 200 - 245 pound manikin)	220	210-232.5	F _{xcrit}	777	3456	M _{xcrit}	1584	179
			F _{ycrit}			-M _{ycrit} (extens)		
			-F _{zcrit} (comp)	1673	7440	M _{zcrit}		
			+F _{zcrit} (tens)	1847	8216	+M _{ycrit} (flex)		
	245	232.5+	F _{xcrit}	836	3719	M _{xcrit}	1850	209
			F _{ycrit}			-M _{ycrit} (extens)		
			-F _{zcrit} (comp)	1853	8243	M _{zcrit}		
			+F _{zcrit} (tens)	2047	9106	+M _{ycrit} (flex)		

UNCLASSIFIED

5360

Figure B-4, Probability of Neck Injury vs. MANIC and NMIX Values

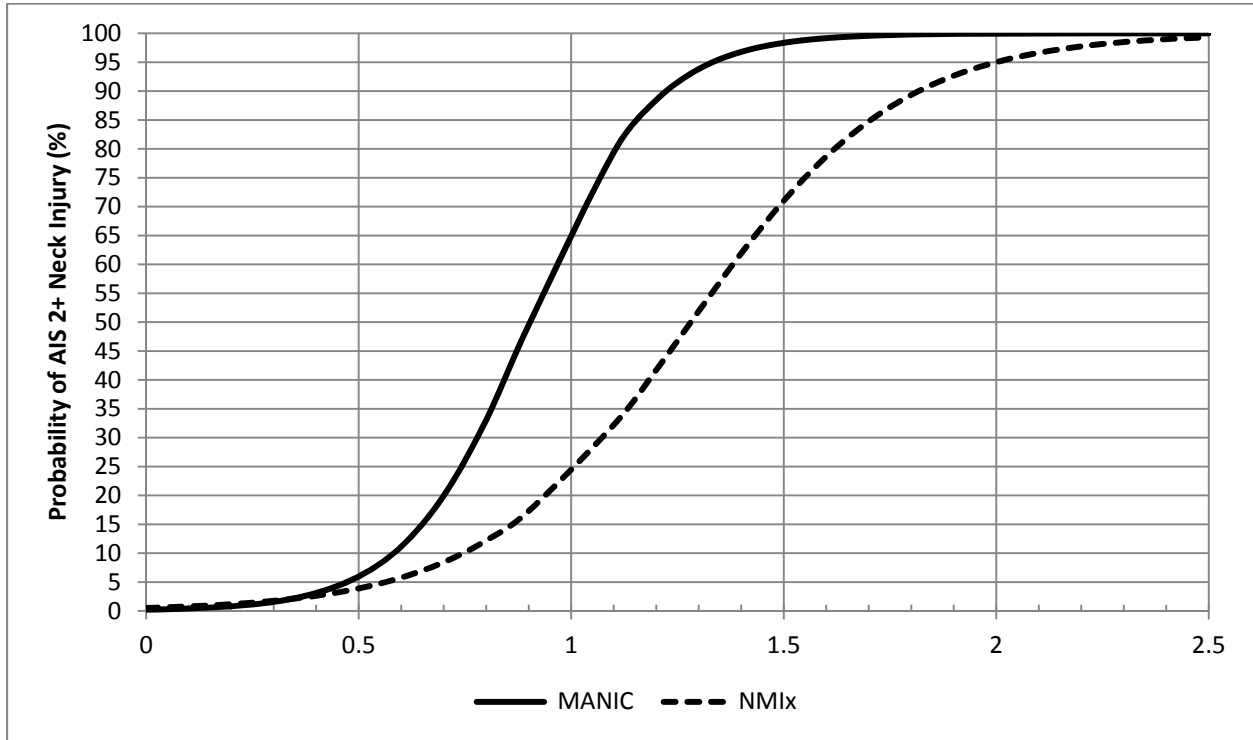

5361
5362

- c. Probability of AIS 2+ injury, as plotted in Figure B-4, based on the MANIC value is defined by:

$$P(AIS \geq 2) = \frac{1}{1 + e^{6.185 - 6.85 * MANIC}}$$

5363
5364

- d. Probability of AIS 2+ injury, as plotted in Figure B-4, based on the Neck Moment Index about the x-axis (NMI_x) value is defined by:

$$P(AIS \geq 2) = \frac{1}{1 + e^{5.2545 - 4.1 * NMI_x}}$$

5365 **APPENDIX C - STRUCTURES**

5366 **C.1 Structures Tables**

5367 Table C-1 only applies to development of the service loads spectra for airframe service life.

5368 **Table C-1, Turbulence Parameters**

Altitude (K feet)	Mission Segment	Direction (NOTE)	P ₁	b ₁ (feet/sec)	P ₂	b ₂ (feet/sec)	L (feet)
0-1	CL, CR, D	Vert & Lat	1.00	2.51	.005	5.04	500
1-2.5	CL, CR, D	Vert & Lat	.42	3.02	.0033	5.94	1750
2.5-5	CL, CR, D	Vert & Lat	.30	3.42	.0020	8.17	2500
5-10	CL, CR, D	Vert & Lat	.15	3.59	.00095	9.22	2500
10-20	CL, CR, D	Vert & Lat	.062	3.27	.00028	10.52	2500
20-30	CL, CR, D	Vert & Lat	.025	3.15	.00011	11.88	2500
30-40	CL, CR, D	Vert & Lat	.011	2.93	.000095	9.84	2500
40-50	CL, CR, D	Vert & Lat	.0046	3.28	.000115	8.81	2500
50-60	CL, CR, D	Vert & Lat	.0020	3.82	.000078	7.04	2500
60-70	CL, CR, D	Vert & Lat	.00088	2.93	.000057	4.33	2500
70-80	CL, CR, D	Vert & Lat	.00038	2.80	.000044	1.80	2500

Abbreviations:	CL=climb segment	CR=cruise segment	D=descent segment
-----------------------	-------------------------	--------------------------	--------------------------


5369 NOTE: Parameter values labeled Vert & Lat are to be used equally in both the vertical and lateral directions.

5370 **Table C-2, Cumulative Occurrences per Thousand Runway Landings**
5371 **that Load Factor N_z is Experienced at the Aircraft CG**

N _z	Cumulative Occurrences
1 ± 0	494,000
1 ± 01	194,000
1 ± 02	29,000
1 ± 03	2,100
1 ± 04	94
1 ± 05	4
1 ± 06	0.155
1 ± 07	0.005
1 ± 08	0

5372

Figure C-1, Ground Turning Lateral Load Factor Spectrum

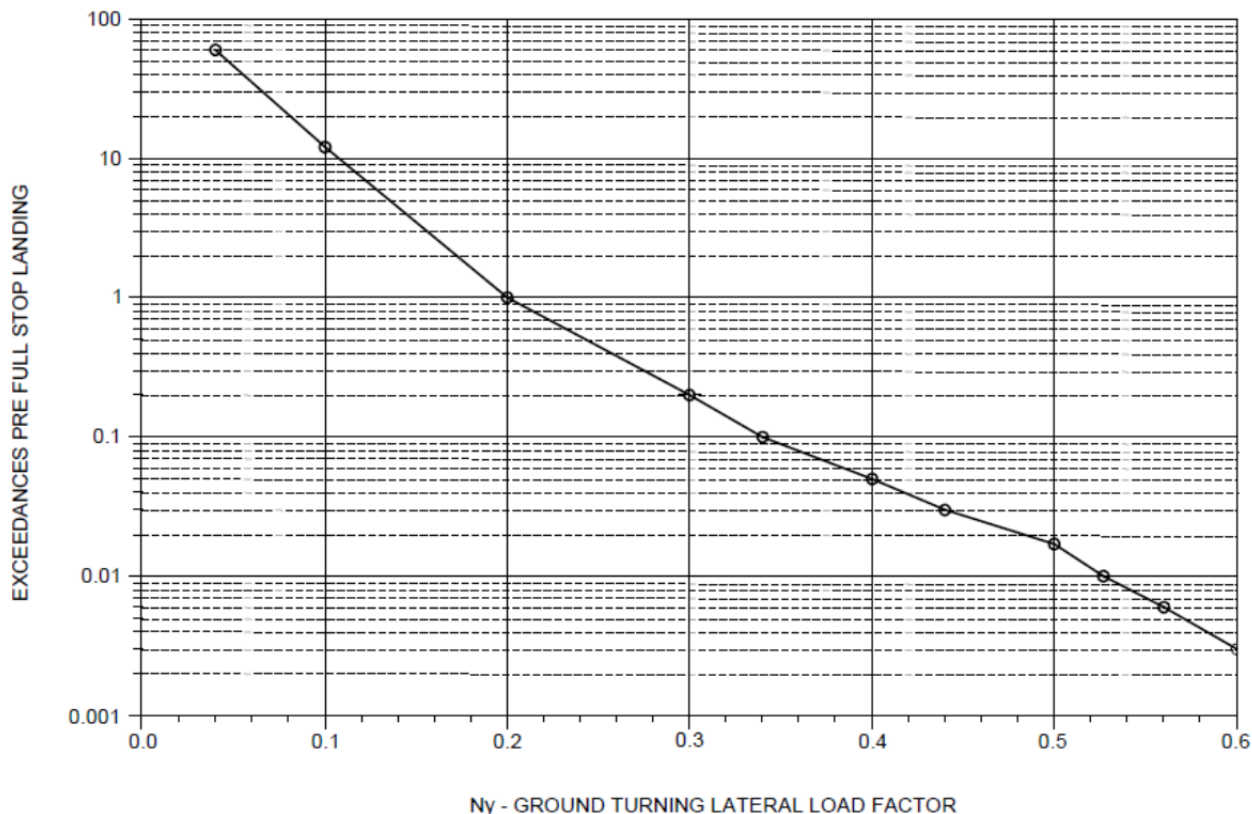

5373 **C.2 Discrete Gust Loads Formulas**

5374 **C.2.1 Vertical Gusts on Wing and Fuselage**

5375 Loads on the wing and fuselage shall be derived from the load factor established from the
5376 following formula:

$$n = n_0 \pm \frac{K_W V_e \cdot U_{de} \cdot a}{498W/S}$$

5377 n 1.0

5378 V_e Equivalent airspeed in knots.

5379 U_{de} Maximum equivalent gust velocity in feet per second of a single (1-cosine) gust of 25
5380 wing mean aerodynamic chord lengths.

5381 W/S Wing loading in pounds per square foot.

5382 a Rate of change of normal force coefficient C_{N_A} with angle of attack (per radian),
5383 corrected for Mach number and aeroelastic effects.

5384 K_W Dimensionless gust factor which accounts for the alleviated motion of the aircraft and the
 5385 time lag of the build-up of aerodynamic lift. This parameter is based on mass ratio (μ) as
 5386 shown in Figure C-2. The subsonic curve shall be used for speeds below the critical
 5387 Mach number. The mass ratio (μ) is expressed as the equation:

$$\mu = \frac{2W/S}{gca\rho}$$


5388 Where:

5389 $g = 32.2 \text{ FPS}^2$.

5390 $c =$ average chord, feet (area/span).

5391 $\rho =$ air density, slugs per cubic feet.

5392 **Figure C-2, Gust Factor**

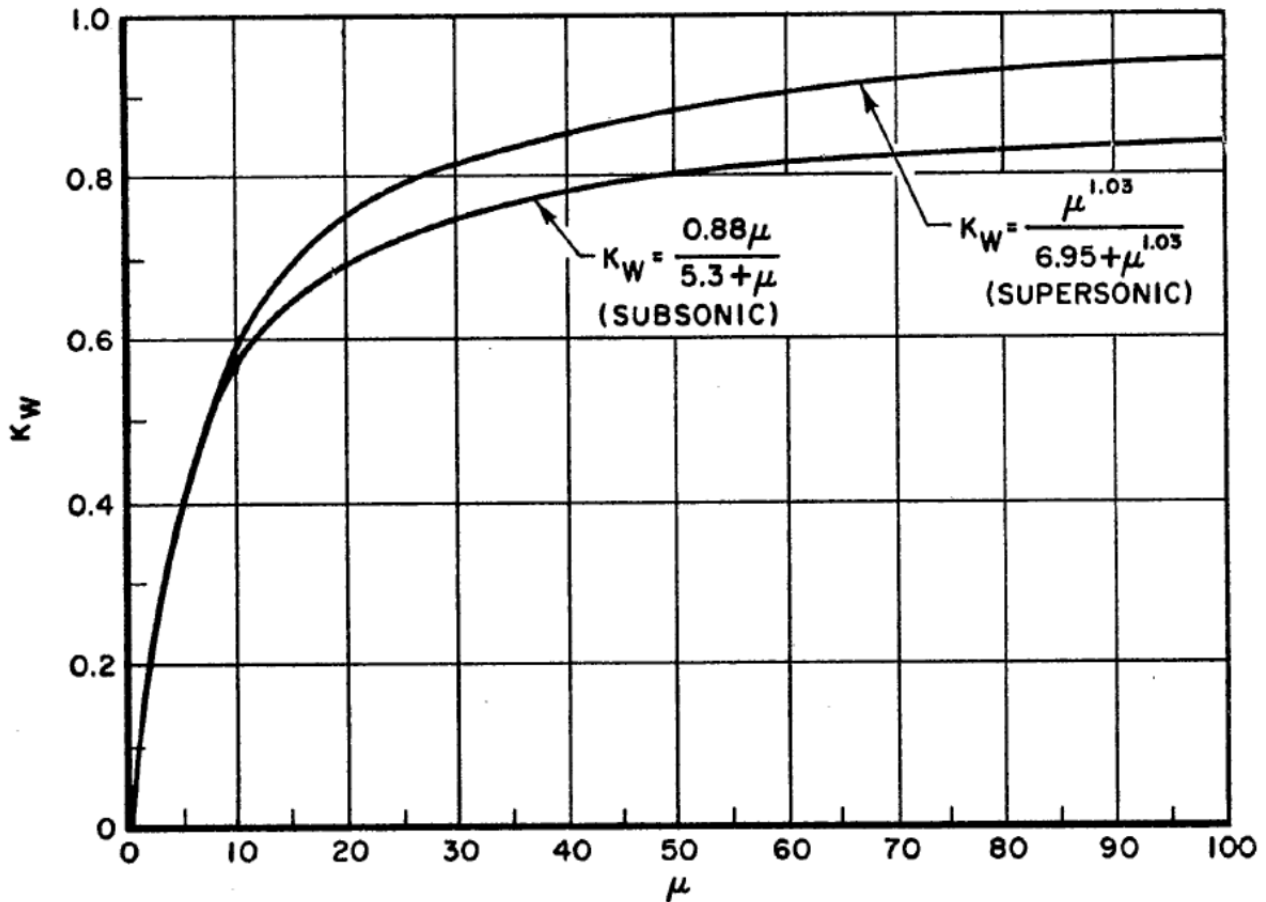

5393 **C.2.2 Vertical Gusts on Fuselage and Horizontal Tail**

5394 The horizontal tail shall encounter a gust of design velocity. The incremental load on the tail
5395 shall be calculated as follows:

$$\Delta F_{ht} = \frac{K_{W_{ht}}}{498} \cdot U_{de} \cdot V_e \cdot S_{ht} \cdot a_{ht} \cdot \left(1 - \frac{d\epsilon}{d\alpha}\right)$$

5396 where a_{ht} is the rate of change of the horizontal tail normal force coefficient with *angle of*
5397 *attack*. The gust factor $K_{W_{ht}}$ shall be equal to 1.1 K_W for the wing for the subcritical regime (K_W
5398 from Figure 9-1) and 1.0 K_W for the super-critical regime. No transient lift development shall be
5399 considered. The term $\left(1 - \frac{d\epsilon}{d\alpha}\right)$ represents the steady downwash effect at the tail.

5400 **C.2.3 Lateral Gusts on Fuselage and Vertical Tail**

5401 Fuselage and vertical tail gusts shall be calculated using the pertinent gust velocities of section
5402 3.1.3.6.1.4 assumed acting horizontally. The tail plane is considered to have an initial sideslip of
5403 zero degrees. The incremental load shall be calculated without consideration of unsteady lift
5404 phenomena in accordance with the formula:

$$\Delta F_{vt} = \frac{K_{W_{vt}}}{498} \cdot U_{de} \cdot V_e \cdot S_{vt} \cdot a_{vt}$$

5405 where $K_{W_{vt}}$ shall be equal to 1.0 and a_{vt} is the rate of change of the vertical tail normal force
5406 coefficient with angle of sideslip.

5407 **C.3 Power Spectral Technique For Developing Gust Loads**

5408 The gust loads shall be based on the gust environment while flying the specified mission
5409 profiles. Gust loads spectra shall be determined utilizing the continuous turbulence concept.
5410 This concept is based on a power spectral description for atmospheric turbulence and provides
5411 for inclusion of the significant rigid body and elastic modes to determine response parameters \bar{A}
5412 and N_0 . Values of \bar{A} and N_0 shall be determined by dynamic analysis. \bar{A} is defined as the ratio
5413 of root mean square load to root mean square gust velocity, expressed as:

$$\bar{A} = \frac{\sigma_Y}{\sigma_W} = \left[\frac{\int_0^{\Omega_c} |H_Y|^2 \Phi_W(\Omega) d\Omega}{\int_0^{\infty} \Phi_W(\Omega) d\Omega} \right]^{1/2} \text{ units/second}$$

5414 N_0 is defined as the characteristic frequency of response or equivalently as the radius of gyration
5415 of the load power spectral density function about zero frequency, expressed as:

$$N_0 = \frac{V}{2\pi} \left[\frac{\int_0^{\Omega_c} \Omega^2 |H_Y|^2 \Phi_W(\Omega) d\Omega}{\int_0^{\Omega_c} |H_Y|^2 \Phi_W(\Omega) d\Omega} \right]^{1/2} \text{ cycles/second}$$

5416 The power spectral density of the atmospheric turbulence is defined by the equation:

$$\Phi_w(\Omega) = \frac{\sigma_w^2 L}{\pi} \left[\frac{1 + \frac{8}{3}(1.339L\Omega)^2}{[1 + (1.339L\Omega)^2]^{11/6}} \right] \frac{ft/sec^2}{Rad/ft}$$

5417 where:

5418 $\Phi_w(\Omega)$ = power spectral density of atmospheric turbulence

5419 σ_w^2 = root mean square gust velocity

5420 Ω = reduced frequency (radians per foot)

5421 L = length variable (feet). See Table C-1, column "L"

5422 H_y = Frequency response function and is defined over the frequency range of significance as the
5423 response (amplitude and phase angle) of the output variable y to a unit sinusoidal excitation.

5424 The frequency of exceedance shall be determined as a function of load level by means of the
5425 following equation:

5426

$$N_y = \sum t N_0 \left[P_1 \exp\left(\frac{-[y - y_{1G}]}{b_1 \bar{A}}\right) + P_2 \exp\left(\frac{-[y - y_{1G}]}{b_2 \bar{A}}\right) \right] \text{exceedance/second}$$

5427

5428 where:

5429 y = net value of load or stress

5430 y_{1G} = value of the load or stress in one-g level flight

5431 t = fraction of total flight time in the given segment

5432 Turbulence field parameters (L, P, and b) are defined in Table C-1. A sufficient number of load
5433 and stress quantities shall be included in the dynamic analysis to ensure that stress distributions
5434 throughout the structure are realistically or conservatively defined. If a stability augmentation
5435 system is utilized to reduce the gust loads, a conservative estimate shall be made of the fraction
5436 of flight time that the system may be inoperative. The flight profiles shall include flight with the
5437 system inoperative for this fraction of the flight time. When a stability augmentation system is
5438 included in the analysis, the effect of system nonlinearities on loads at the limit load level shall
5439 be realistically or conservatively accounted for.

5440 The expected utilization of the *aircraft* shall be represented by one or more flight profiles in
5441 which the payload and the variations with time of speed, altitude, gross weight, and center of
5442 gravity position are defined. The profiles shall be divided into mission segments, or blocks, for
5443 analysis. Average or effective values of pertinent parameters shall be defined for each segment.
5444

5445 **APPENDIX D - TRADE SPACE**

5446 **Advanced Pilot Training Program Aircraft System Specification**
5447 **Requirements Selections and Certifications**

5448 Offerors shall select specification requirements in accordance with the instructions
5449 in *red italics* below and indicate their intent to have the requirements included in
5450 the APT Aircraft System Specification by signing the certification on the last page
5451 of this document.

5452 *Trade Space: Fill in the blank in the requirement statement below with the*
5453 *value representing the proposed solution's performance. Value must be at*
5454 *least 6.5 G. All values must be rounded down to the nearest 0.1 G.*

5455 **3.1.2.1 High G Maneuvering**

5456 The *aircraft* shall perform (without degradation to the *aircraft* structures, *components*, and
5457 systems) the high G maneuvering in accordance with (IAW) section A.1 with a load factor of at
5458 least ___ G using the additional performance ground rules defined in section A.1.

5459 *Trade Space: Fill in the blank in the requirement statement below with the*
5460 *value representing the proposed solution's performance. Value must be at*
5461 *least 20°. All values must be rounded down to the nearest 0.5°.*

5462 **3.1.2.6 High Angle-of-Attack (AOA) Maneuvering**

5463 The *aircraft* shall perform high *angle-of-attack (AOA)* maneuvering to include, but not limited to
5464 the following:

- 5465 a. 1 G Deceleration with pitch (+2° to -2°) and roll (+30° to -30°) captures
5466 b. 1 G Constant AOA Roll
5467 c. Constant AOA Maneuver with Air-to-Air Tracking

5468 The *aircraft* shall maintain an AOA of at least ___° during the maneuvers while maintaining
5469 Level 1 (*Satisfactory*) *flying qualities* and departure resistance using the following additional
5470 performance ground rules: Fuel weight at 50% (relative to maximum fuel capacity), PA equal to
5471 15,000 feet, Airspeed no greater than 0.9 Mach and Standard Day.

5472 *Trade Space: Check the box for one of the two requirements below,*
5473 *depending on whether the offer intends to meet the threshold or objective*
5474 *requirement, ordered respectively.*

5475 **Terrain Warning and Avoidance - Threshold**

5476 **3.2.3.5 Terrain Warning and Avoidance**

5477 The *aircraft* shall provide a Ground Proximity Warning System (GPWS) integrated with Radar
5478 Altimeter, and (for *aircraft* configurations with digital flight control system) include the
5479 necessary growth path (i.e., group A and other hardware *components*, excluding software) for
5480 installation and integration of an Auto-Ground Collision Avoidance System (Auto-GCAS).

5481 **4.2.3.5 Terrain Warning and Avoidance**

5482 The GPWS requirement shall be verified by flight test. The Auto-GCAS growth path
5483 requirement shall be verified by analysis. The flight test shall consist of verifying that the
5484 *aircraft* installed performance conforms to the TAWS Tailored Performance Matrix. The
5485 analysis shall verify the growth path for Auto-GCAS. The requirement shall be successfully
5486 verified when the Government confirms the full content of the requirement is met to the extent
5487 that the verification method(s) can provide.

5488 **Terrain Warning and Avoidance - Objective**

5489 **3.2.3.5 Terrain Warning and Avoidance**

5490 The *aircraft* shall integrate an Auto-Ground Collision Avoidance System (Auto-GCAS) that
5491 provides automatic recovery of the *aircraft* from any *aircraft* attitude (i.e., upright, banked, dive,
5492 inverted, etc.) at aircrew-selectable AGL altitude.

5493 **4.2.3.5 Terrain Warning and Avoidance**

5494 This Auto-GCAS requirement shall be verified by flight test. The requirement shall be
5495 successfully verified when the Government confirms the full content of the requirement is met to
5496 the extent that the verification method(s) can provide.

5497 **Trade Space:** *Check the box to keep the requirement statements below,*
5498 *depending on whether the offer intends to meet the objective requirement. If*
5499 *offer does not intend to meet the objective requirement, then leave the box*
5500 *blank and sign your initials here:*

5501 **Ground Based Training Systems (GBTS) Connectivity Requirement**

5502 **3.2.4.5 Ground Based Training Systems (GBTS) Connectivity**

5503 Without any degradation to aircraft-to-aircraft network operations, the datalink shall provide data
5504 exchange between the *aircraft* and *Ground Based Training System (GBTS)* components (WST
5505 and OFT) with sufficient *data rate*, sufficient *link margin*, and no *objectionable latency* to
5506 support up to 12 *GBTS* components operating concurrently on the network and to enable the
5507 conduct of multi-ship missions involving *aircraft* and *GBTS* components (up to 8 participants in
5508 any combination of *aircraft/GBTS* components) within the Connectivity Region of the datalink.
5509 (Note: *GBTS* components and supporting ground datalink are collocated and within 100 NM
5510 line-of-sight from local flying area. *GBTS* components on the network are over and above the
5511 specified number of *aircraft* defined in section 3.2.4.3.)

5512 **3.2.4.5.1 GBTS Voice Communication**

5513 The *aircraft* shall provide two-way voice communication with *GBTS* components (WST and
5514 OFT) via either the datalink or a voice radio channel, using operator audio interface (headset and
5515 microphone), and without the need for operational multi-mode (VHF/UHF) radios in the *GBTS*
5516 components. (Note: Voice communication support for up to 12 *GBTS* components operating
5517 concurrently within 100 NM line-of-sight from local flying area.)

5518 **4.2.4.5 Ground Based Training Systems (GBTS) Connectivity**

5519 The requirement shall be verified by analysis and flight demonstration. The analysis shall
5520 consist of modeling and simulation to evaluate the data link throughput performance under
5521 different loading conditions. The flight demonstration shall consist of flying multi-ship test
5522 missions utilizing *aircraft* and *GBTS* components (WST and OFT). The test missions shall
5523 include *Embedded Training* system operations between the *aircraft* and *GBTS*. The verification
5524 shall be considered successful when the analysis and flight demonstration shows that the *aircraft*
5525 datalink provides the specified capability.

5526 **4.2.4.5.1 GBTS Voice Communication**

5527 The requirement shall be verified by flight demonstration. The flight demonstration shall consist
5528 of flying multi-ship test missions utilizing *aircraft* and *GBTS* components (WST and OFT). The
5529 test missions shall include *Embedded Training* system operations between the *aircraft* and
5530 *GBTS*. The verification shall be considered successful when the flight demonstration shows that
5531 the *aircraft* provides the specified capability.

5532 **Trade Space:** *Check the box to keep the requirement statements below,*
5533 *depending on whether the offer intends to meet the objective requirement. If*
5534 *offer does not intend to meet the objective requirement, then leave the box*
5535 *blank and sign your initials here:*

5536 **Ground Support Station (GSS) Connectivity**

5537 **3.2.4.6 Ground Support Station (GSS) Connectivity**

5538 Without any degradation to aircraft-to-aircraft network operations, the datalink shall provide data
5539 exchange (including GSS-to-aircraft two-way text messaging) between the *aircraft* and GSS
5540 with sufficient *data rate*, sufficient *link margin*, and no *objectionable latency* to support up to 3
5541 GSSs operating concurrently on the network and to enable the GSS live monitoring IAW section
5542 3.2.4.6.2 and real-time mission scenario inputs IAW 3.6.7, within the Connectivity Region of the
5543 datalink. (Note: GSS and supporting ground datalink are collocated and within 100 NM line-of-
5544 sight from local flying area. GSS(s) on the network are over and above the specified number of
5545 *aircraft* defined in section 3.2.4.3)

5546 **3.2.4.6.1 GSS Voice Communication**

5547 The *aircraft* shall provide two-way voice communication with GSS via either the datalink or a
5548 voice (VHF/UHF) radio channel. (Note: Voice communication support for up to 3 GSSs
5549 operating concurrently within 100 NM line-of-sight from local flying area.)

5550 **3.2.4.6.2 GSS Live Monitoring**

5551 The GSS shall provide the live tactical picture of the training missions and display mission data
5552 IAW Table 3-3 to enable the GSS operator to effectively inject real-time mission scenario inputs
5553 into the independent missions.

5554 **Table 3-3, GSS Live Monitoring Functions and Display Presentation**

- | |
|---|
| <ul style="list-style-type: none">a. <i>Aircraft</i> track with unique identifier, airspeed and altitude (<i>GBTS</i> is considered an <i>aircraft</i> for APT configurations if implementing <i>GBTS</i> Connectivity).b. Weapons event data.c. Threat/Target event data.d. Two-dimensional plan view of Local Flying Area (includes elevation contours, surface targets and range boundaries).e. Capability to zoom and pan.f. Capability to filter information by mission.g. Capability to compose and send text messages to a specific <i>aircraft</i>, to all participant <i>aircraft</i> in an individual mission, and to all <i>aircraft</i> in the local flying area. |
|---|

5555 **4.2.4.6 Ground Support Station (GSS) Connectivity**

5556 The requirement shall be verified by analysis and flight demonstration. The analysis shall
5557 consist of modeling and simulation to evaluate the data link throughput performance under
5558 different loading conditions. The flight demonstration shall consist of flying single-ship and
5559 multi-ship test missions. The test missions shall include *Embedded Training* system operations
5560 between the *aircraft* and GSS. The verification shall be considered successful when the analysis
5561 and flight demonstration shows that the *aircraft system* provides the specified capability.

5562 **4.2.4.6.1 GSS Voice Communication**

5563 The requirement shall be verified by flight demonstration. The flight demonstration shall consist
5564 of flying single-ship and multi-ship test missions. The test missions shall include *Embedded*
5565 *Training* system operations between the *aircraft* and GSS. The verification shall be considered
5566 successful when the flight demonstration shows that the *aircraft system* provides the specified
5567 capability

5568 **4.2.4.6.2 GSS Live Monitoring**

5569 The requirement shall be verified by flight demonstration. The flight demonstration shall consist
5570 of flying single-ship and independent multi-ship test missions. The test missions shall include
5571 *Embedded Training* system operations between the *aircraft* and GSS. The verification shall be
5572 considered successful when the flight demonstration shows that the *aircraft system* provides the
5573 specified capability.

5574 ***Trade Space:*** *Check the box to keep the requirement statements below,*
5575 *depending on whether the offer intends to meet the objective requirement. If*
5576 *offer does not intend to meet the objective requirement, then leave the box*
5577 *blank and sign your initials here:*

5578 **Aerial Refueling Full Integration (Receiver)**

5579 **3.4.2.1 Aerial Refueling Subsystem Full Integration (Receiver)**

5580 When the *aircraft* is configured with the fully integrated receptacle aerial refueling system, the
5581 following requirements shall also be met (over and above what is specified in section 3.4.2):

- 5582 a. The *aircraft* shall be capable and compatible to aerial refuel as a receiver during day and
5583 night operations from the USAF KC-135 and KC-10 tanker boom systems using ATP
5584 3.3.4.2 (Chapter 2) procedures and with KC-46 tanker boom system IAW KC-46
5585 Interface Control Document for Receivers.
- 5586 b. The *aircraft's* receptacle installation shall comply with NATO ATP 3.3.4.5, Section II
5587 interface requirements.

- 5588 c. The receptacle installation and operation shall not degrade the performance of other
5589 subsystems such as: electrical system, hydraulic system, fuel system, fire protection,
5590 flight controls or aircrew egress.
- 5591 d. The *aircraft* shall be capable of being aerial refueled from 15% fuel capacity to
5592 maximum fuel capacity or to its maximum in-flight gross weight (whichever is least) in
5593 less than 8 minutes.
- 5594 e. Both aircrew positions shall have the required controls and indicators for each aircrew
5595 member to individually accomplish the rendezvous and aerial refueling tasks.
- 5596 f. The *aircraft*, while engaged as a receiver, shall be able to maneuver (up to 30° bank)
5597 throughout the boom envelope of each tanker at all receiver permissible center of gravity
5598 (CG) ranges and gross weights up to *aircraft* maximum in-flight refuelable fuel capacity
5599 or maximum in-flight gross weight (whichever is least).
- 5600 g. The *aircraft* shall provide an automated and manual (Receiver aircrew initiated) method
5601 to disconnect from the boom, while engaged as a receiver.
- 5602 h. The *aircraft* shall provide a method to isolate the receptacle from the rest of the fuel
5603 system. The *aircraft* shall control fuel transfer sequencing and maintain CG throughout
5604 all *aircraft* on-loads without aircrew action.
- 5605 i. The *aircraft* shall have external lighting IAW NATO ATP 3.3.4.5, Section II.
- 5606 j. The *aircraft* shall provide independent control (on/off) of the upper rotating beacon light.
- 5607 k. The *aircraft's* paint scheme shall have the applicable/appropriate markings for aerial
5608 refueling IAW NATO ATP 3.3.4.5, Section II.
- 5609 l. The aerial refueling receptacle and surrounding area shall be free of obstructions and
5610 shall not need to be replaced for the *design service life* of the *aircraft* based on the usage
5611 defined in section A.14.

5612 **4.4.2.1 Aerial Refueling Subsystem Full Integration (Receiver)**

5613 The requirement shall be verified by analysis, inspection, ground test and flight test. The
5614 analysis shall include a detailed description of the subsystem and interfaces. The inspection shall
5615 include drawings and the *aircraft*. The ground test shall include the testing required to proceed
5616 to flight test (e.g., Iron bird testing or fuel system mock-up testing) as directed by the
5617 certification authority. The flight test shall be up to and including the contact position behind a
5618 KC-135, KC-46 and KC-10 tanker throughout the *aircraft's* refueling envelope with successful
5619 on-load of fuel at the required rate. The verification shall be satisfied with the issuance of a
5620 Category 3 Aerial Refueling Clearance per ATP 3.3.4.2 Annex BA to refuel as a receiver from
5621 the KC-135, KC-10 and KC-46 tankers during day and night ambient conditions.

5622 **Trade Space:** Check the box to keep the requirement statements below,
5623 depending on whether the offer intends to meet the objective requirement. If
5624 offer does not intend to meet the objective requirement, then leave the box
5625 blank and sign your initials here:

5626 **Targeting Pod System Simulation**

5627 **3.6.6 Targeting Pod System Simulation**

5628 The *aircraft* shall provide unclassified targeting imagery, controls and switchology for aircrew to
5629 employ a simulated Targeting Pod system per Table 3-31. Targeting Pod system functionality
5630 shall be HOTAS-selectable via the *HOTAS controls*.

5631 **Table 3-31, Targeting Pod Functionality**

<ul style="list-style-type: none">a. Air-to-ground modeb. Forward looking infrared (FLIR) sensorc. Charge-coupled device (CCD) television sensord. Laser range findere. Long-range GPS geo-coordinates for weaponsf. Variable field of view (super wide (24 degrees), wide (4 degrees) and narrow (1 degree))g. Variable zoom levelsh. Exchange of imagery between <i>aircraft</i> (<i>GBTS</i> is considered an <i>aircraft</i> for APT configurations if implementing <i>GBTS</i> Connectivity)
--

5632 **4.6.6 Targeting Pod System Simulation**

5633 The requirement shall be verified by ground demonstration and flight demonstration. The
5634 ground demonstration shall consist of demonstrating (off-aircraft) the specified Targeting Pod
5635 system capability. The flight demonstration shall consist of demonstrating the specified system
5636 capability including exchange of imagery between *aircraft* (*GBTS* is considered an *aircraft* for
5637 APT configurations if implementing *GBTS* Connectivity). The verification shall be considered
5638 successful when the ground demonstration and flight demonstration show that the specified
5639 system capability is provided.

5640 *Trade Space: Fill in the blank in the requirement statement below with the*
5641 *value representing the proposed solution's performance. Value must be no*
5642 *greater than 45 minutes. All values must be rounded up to the nearest 1*
5643 *minute.*

5644 **3.8.8 Turn-Around Time**

5645 The *aircraft* Turn-Around Time shall not exceed ___ minutes. Servicing of *aircraft*
5646 systems/subsystems/components (i.e., fuel, oxygen, oil and electrical) shall be accomplished
5647 sequentially. Not more than two maintainers shall be required to perform the turn around.
5648 (Note: Turn-Around Time is defined as the clock time required to prepare a returned mission
5649 capable *aircraft* upon mission termination for issue to the next aircrew. The Turn-Around Time
5650 begins at engine shutdown of the previous mission and ends when the *aircraft* is reported ready
5651 for issue to the next aircrew.)

5652 The aforementioned requirement statements in this document, identified by title
5653 and paragraph number, are intended to be incorporated into the APT System
5654 Specification and are hereby part of the offer made to the Government in response
5655 to RFP FA8617-16-R-6219.

5656 _____

5657 Company Name

5658 Signed: _____

5659 Name and Title (authorized to legally bind the company)

5660 _____

5661 Date